

escapements

FE Series
Feed Escapement



numatics

Table of Contents



FE Series	3-6
Features and Benefits	3
How To Order	4
Dimensions and Technical Specifications	4
Switch Information	5-6

Air-Oil Systems, Inc. www.airoil.com



The FE-Series design uses two double acting cylinders that are cross-ported and internally sequenced for smooth functioning parts regulation. Internal back pressure cross-port design allows both rods to be retracted with the air off to easily clear jammed parts. A four way two position valve is required for operation.

A. Body

High strength hardcoat aluminum.

B. Rods

Ground aluminum, hardcoat anodized, Teflon impregnated non-rotating.

C. Retract Stop Adjustments


Two adjustment screws allow flexibility to adjust the retract stroke on both rods independently.

D. Bronze Bushings


High side load capabilities, self lubricating, long life.

E. Sensing

Hall effect sensors available to sense extend & retract positions.

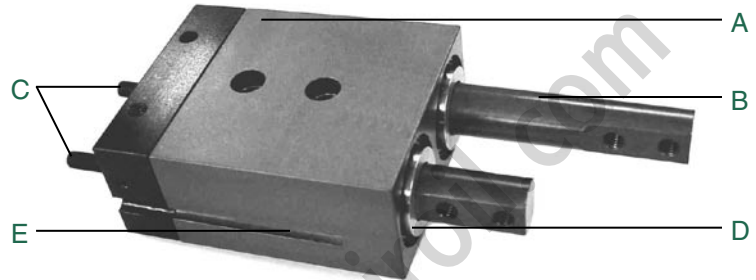

How to Order

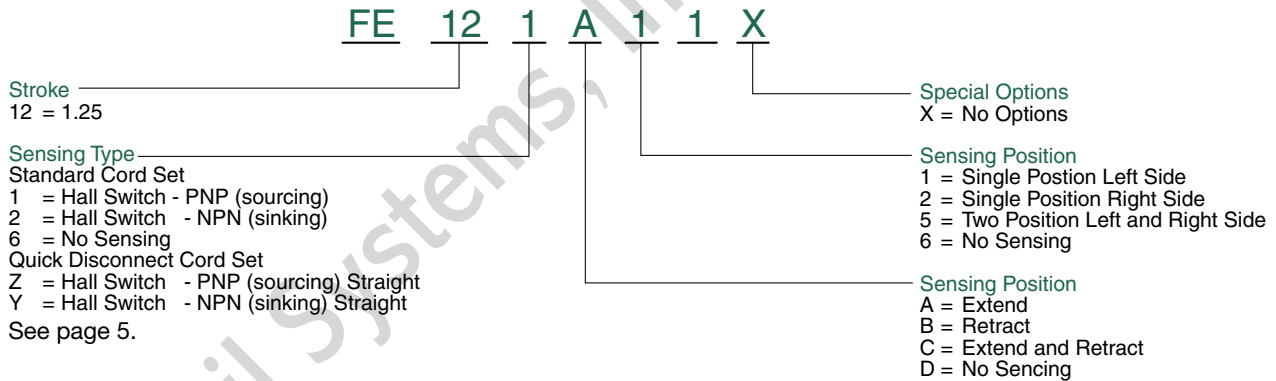


When ordering additional switches:

SWITCH DESCRIPTION	STANDARD PART NO.	QUICK DISCONNECT PART NO.
Hall Effect-PNP (Sourcing)	CS-20TP	CS-20TP-QD
Hall Effect-NPN (Sinking)	CS-20TN	CS-20TN-QD
Reed Switch	CS-20TR	CS-20TR-QD



FE Series Dimensions and Technical Specifications

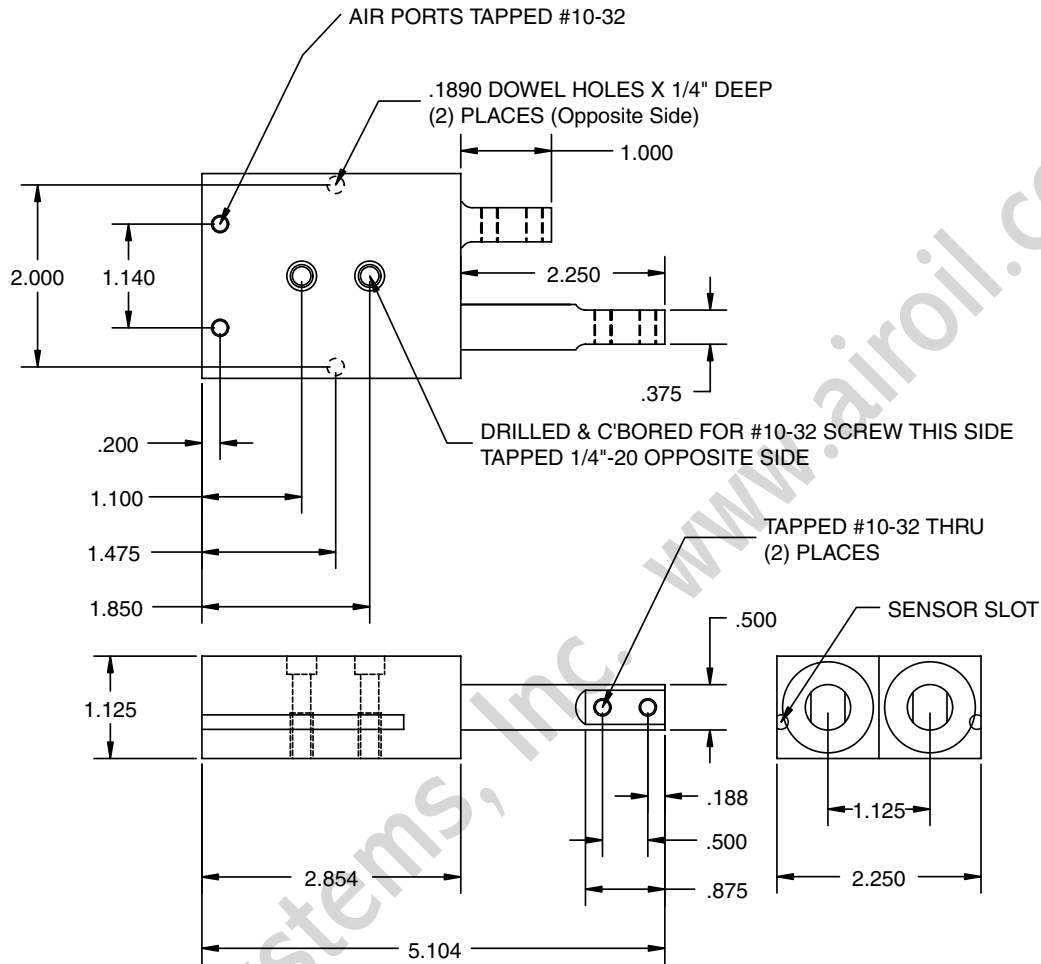


Specifications

FE-12

Stroke	1.25 in.
Force Extend @ 100 psi	43.0 lbs.
Force Retract @ 100 psi	41.0 lbs.
Time	0.35 Sec.
Pressure Range	40-120 psi
Side Play	+/- 0.001 in.
Displacement	0.48 cu. in.
Weight	12.0 oz.


LOAD CAPACITY	STATIC	DYNAMIC
Mx	150	13 in.-lbs.
My	150	13 in.-lbs.
Mz	150	13 in.-lbs.

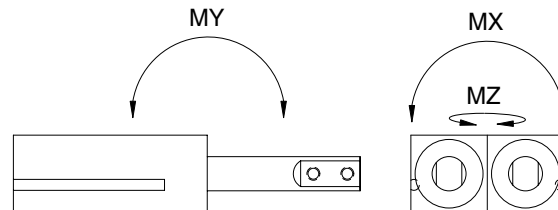




FE Series Switch Information

	SWITCH OR BRACKET DESCRIPTION	STANDARD PART NO.	QUICK DISCONNECT PART NO.
1	Hall Effect PNP (Sourcing) 4mm	CS-20TP	CS-20TP-QD
1	Hall Effect NPN (Sinking) 4mm	CS-20TN	CS-20TN-QD
1	Reed Switch 4mm	CS-20TR	CS-20TR-QD




Reed Switch (AC/DC NO) 8 mm Connector - CS-20TR-QD




Sensor Type	Reed Switch
Switching Logic	SPST Normally Open
Output	-
Operating Voltage	5-120V DC/AC 50/60 Hz
Switching Current	50mA max. (Resistive)
Power Rating*	6 Watts
Voltage Drop	2.5V
Current Consumption	-
Leakage Current	-
LED Indicator	Red
Operating Frequency	200 Hz
Temperature Range	-
Shock / Vibration	30G/9G
Protection Circuit	None
Set Screw Max. Torque	-

Reed Switch (AC/DC NO) Flying Lead - CS-20TR

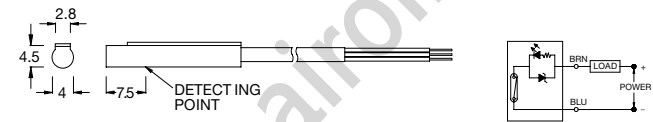


Sensor Type	Reed Switch
Switching Logic	SPST Normally Open
Output	-
Operating Voltage	5-120V DC/AC 50/60 Hz
Switching Current	50mA max. (Resistive)
Power Rating*	6 Watts
Voltage Drop	2.5 max.
Current Consumption	-
Leakage Current	-
LED Indicator	Red
Operating Frequency	200 Hz
Temperature Range	-
Shock / Vibration	30G/9G
Protection Circuit	None
Set Screw Max. Torque	-

Electro Switch (PNP NO) 8 mm Connector - CS-20TP-QD



Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	PNP Current Spurcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	1.5 V @ 25 mA max.
Current Consumption	15 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Green
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

Electro Switch (NPN NO) 8 mm Connector - CS-20TN-QD




Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	NPN Current Spurcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	0.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Red
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)




FE Series

Electro Switch (NPN NO) Flying Lead - CS-20TN

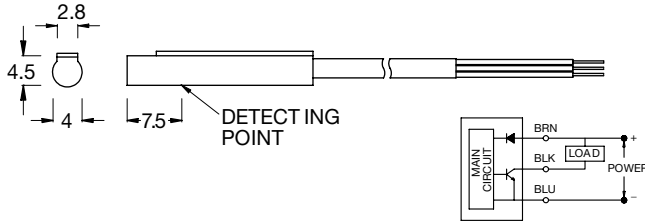

Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	NPN Current Spurcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	0.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Red
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

Electro Switch (PNP NO) Flying Lead - CS-20TP

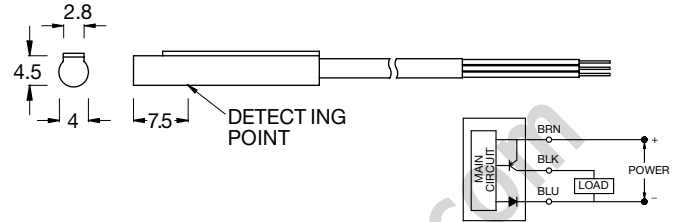


Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	PNP Current Spurcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	1.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Green
Cable	Abrasion resistant polyurethane
	(PUR) jacket, PVC insulation
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

Female Connectors for Reed Switches and Hall Effect Sensors


Dimensions (mm)

TYPE	ORDER CODE
Straight, 5 m Cable	PXCST
Elbow, 5 m Calbe	PXC90

Straight Type



Elbow Type



NUMATICS®

World Class Supplier
of Pneumatic Components



World Headquarters

Numatics Incorporated

Phone: 248-887-4111
Fax: 248-887-9190

UNITED STATES

Numatics – Air Preparation

Phone: 810-667-3900
Fax: 810-667-3902

Numatics – Valves

Phone: 248-887-4111
Fax: 248-887-9190

Numatics – Miniature Valves

Phone: 248-960-1400
Fax: 248-960-2160

Numatics – Cylinders

Phone: 615-771-1200
Fax: 615-771-1201

Numatics – Rodless Cylinders

Phone: 519-452-1777
Fax: 519-452-3995

Numatics – Automation

Phone: 440-934-3200
Fax: 440-934-2288

CANADA

Ontario

Numatics, Ltd.
Phone: 519-452-1777
Fax: 519-452-3995

Quebec

Numatics, Ltd.
Phone: 514-332-6444
Fax: 514-332-9273

British Columbia

Numatics, Ltd.
Phone: 604-574-0401
Fax: 604-574-3713

EUROPE

Germany – European Headquarters

Numatics GmbH
Phone: 011-49-22 41-31 60-0
Fax: 011-49-22 41-31 60 40

Hungary

Numatics Kft.
Phone: 011-36-13 82 21 35
Fax: 011-36-12 04 39 47

EUROPE

England

Numatics Limited
Phone: 011-44-1525-37 07 35
Fax: 011-44-1525-38 25 67

France

Numatics s.a.r.l.
Phone: 011-33-1 41 21 48 88
Fax: 011-33-1 41 21 48 89

Italy

Numatics srl
Phone: 011-39-030-373 19 99
Fax: 011-39-030-373 19 81

Netherlands

Numatics B.V.
Phone: 011-31-418-65 29 50
Fax: 011-31-418-65 29 43

Spain

Numatics Spain S.L.
Phone: 011-34-93-221 21 96
Fax: 011-34-93-221 35 14

AFRICA

South Africa

Numatics SA (Pty) Ltd.
Phone: 011-27-11-8 65 44 52
Fax: 011-27-11-8 65 42 90

LATIN & SOUTH AMERICA

Mexico

Numatics de Mexico S.A. de C.V.
Phone: 011-52-222-284 6176
Fax: 011-52-222-284 6179

Brazil

Valvair Comercial Ltda.
Phone: 011-55-12-351 2874
Fax: 011-55-12-351 1958

ASIA & PACIFIC

Australia

Numatics Australia Pty. Ltd.
Phone: 011-61-3-95 63 86 00
Fax: 011-61-3-95 63 85 11

Taiwan – Asian Headquarters

Numatics Co, Ltd. Asia
Phone: 011-886-2-29 15 16 05
Fax: 011-886-2-29 14 18 97

For a comprehensive listing of all Numatics production and distribution facilities worldwide, visit www.numatics.com