



Filter – Standard

SF2

= "Most Popular"



Manual Drain



Auto Drain



SF2-04-SYV0

Features

- Stainless Steel Construction Handles Most Corrosive Environments
- Meets NACE Specifications
- High Flow: 1/2" – 70 SCFM

Specifications


Flow Capacity*	Port Size	5 Micron 70 SCFM
Bowl Capacity		4.0 Ounces
Filter Rating		5 Micron
Port Threads		1/2 Inch
Pressure & Temperature Ratings –		
Manual Drain –		0 to 300 PSIG (0 to 20.7 bar) 40°F to 180°F (4°C to 82°C)
Automatic Drain –		15 to 175 PSIG (1 to 12 bar) 40°F to 120°F (4°C to 49°C)
Useful Retention**		1.7 Ounce
Weight		1.9 lb. (0.85 kg)

* Inlet pressure 90 PSIG (6.2 bar) and 5 PSID (0.3 bar) pressure drop.

**Useful Retention refers to volume below the quiet zone baffle.

Materials of Construction

Body	316 Stainless Steel
Bowl	316 Stainless Steel
Deflector	Acetal
Drain	316 Stainless Steel
Element Holder	Acetal
Filter Element	Polyethylene
Seals	Fluorocarbon

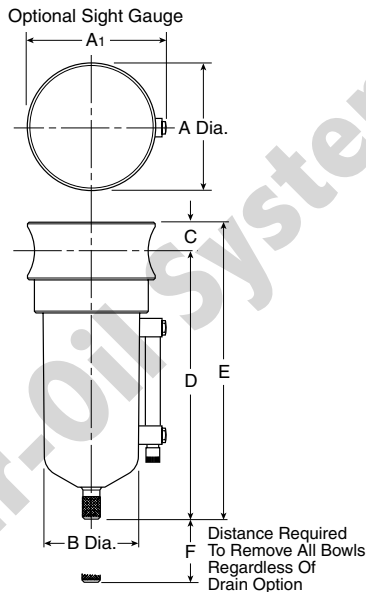

Dimensions

Models	Inches (mm)	A	A1	B	C	D	E	F
Miniature Unit SF2-04-XXXX		2.38 (60)	2.50 (64)	1.75 (44)	0.56 (14)	5.00 (127)	5.56 (141)	2.12 (54)

= "Most Popular"

SF2 Filter Kits & Accessories

Drain Kit –


- Automatic Drain SRP-96-007
- Manual Drain SRP-96-008

Filter Element Kits –

- Particulate (40 Micron) SRP-96-004
- Particulate (5 Micron) SRP-96-003

Liquid Level Sight Gauge Kit SRP-96-026

Pipe Nipple – 1/2" 316 Stainless Steel SRP-96-010

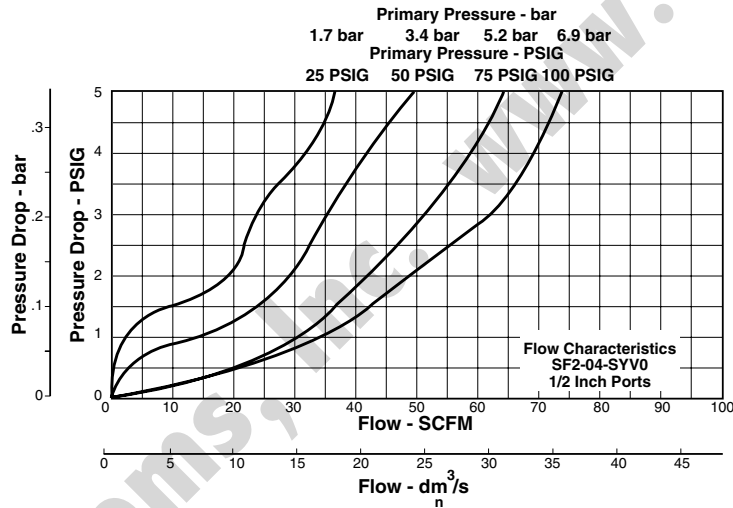

Ordering Information

Model Type	Port Size	Model Number	Model Number
Manual Drain	1/2	SF2-04-SYV0	—
Automatic Drain	1/2	—	SF2-04-SXV0

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.

