




Rotary Vane Actuators
www.airoil.com
Air-Oil Systems, Inc.

Rotary Vane Actuators

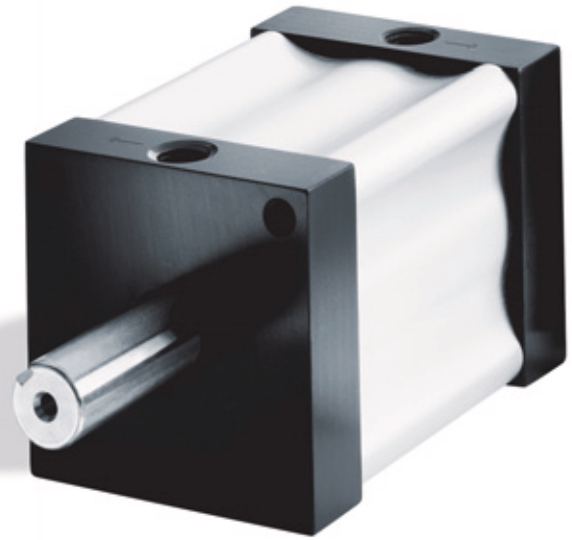

Answer Engineering

TURN-ACT[®]

An **IMC** Company

Rotary Vane Actuators

Unitized Body

Turn-Act's patented extrusion combines tube, stator and bolt lobes into a one-piece unitized body.

Unique design provides torsional rigidity allowing the unit to stop and hold shaft loads internally, while effectively transmitting shocks to its mountings

Machined Aluminum Heads

Shaft Bearings

Full complement needle bearings accommodate substantial radial loads

Stator

Air Inlets

The large hole permits more rapid air entry and exhaust for faster response time


Bolt Lobe

Rotor Shaft Assembly


Turn-Act's patented rotor/vane assembly eliminates the possibility of shaft rotation in the rotor and permits the use of a wide variety of shaft materials. Output shafts can be custom ordered for specific application requirements

The Gold Seal

Turn-Act's patented polyurethane seal provides smooth rotation, minimal leak rates, low pressure breakaways and millions of cycles

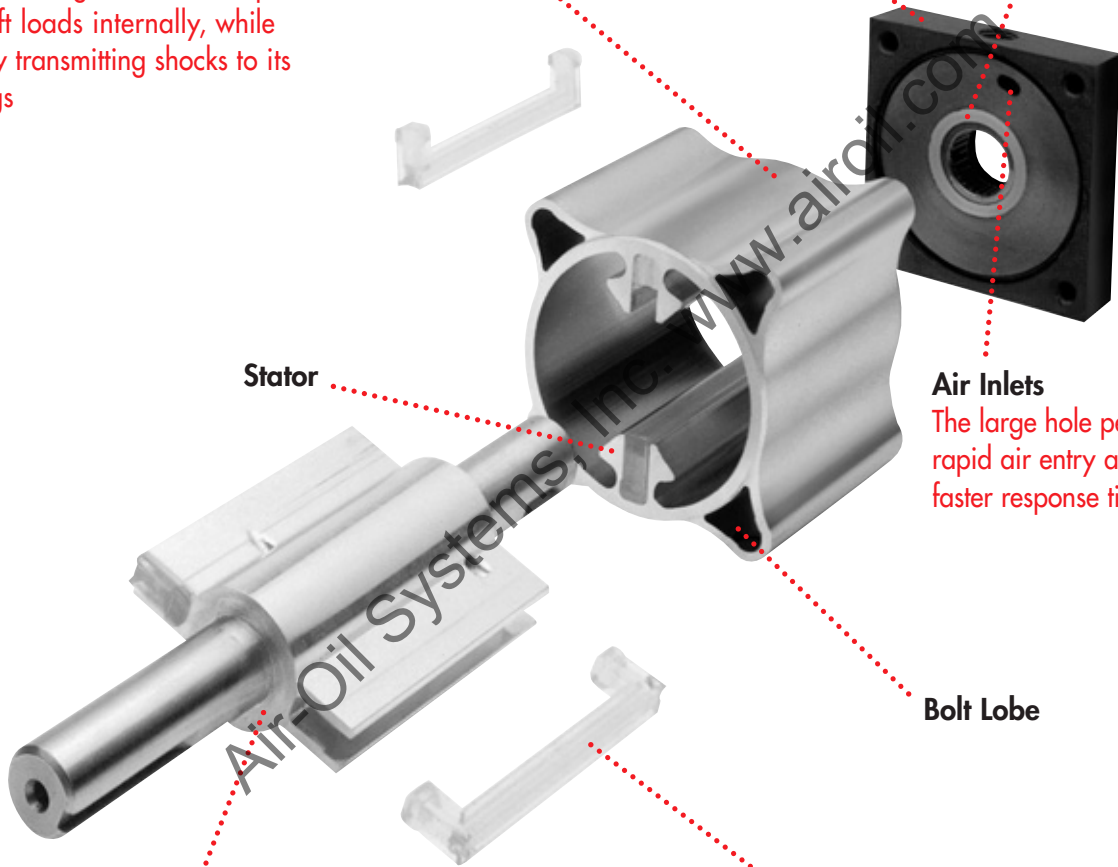

Dimensional Data

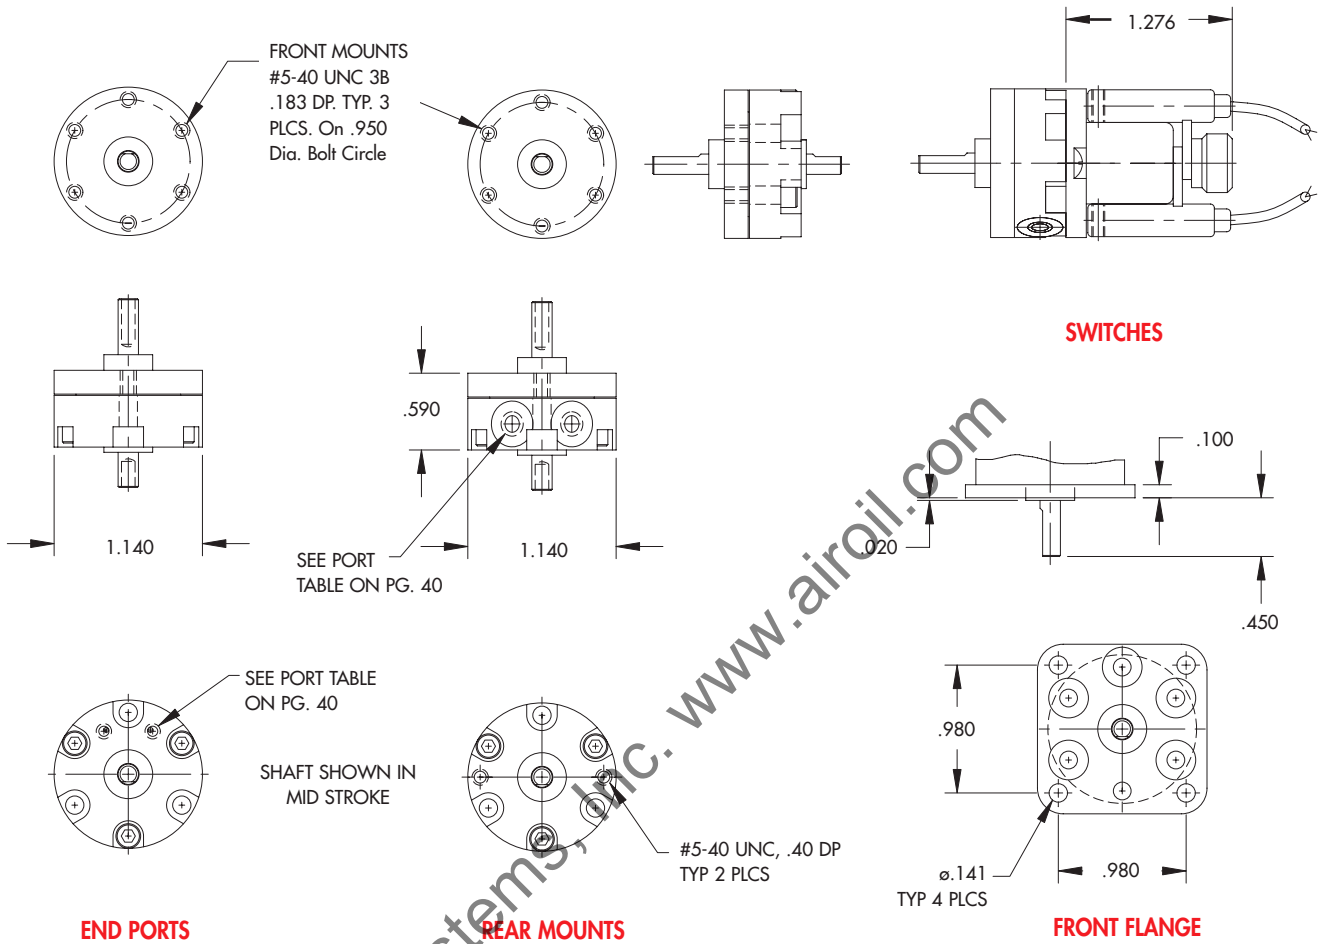

How to Order: Micro-Vane

SERIES	TORQUE	ROTATION	PORTS	OPTIONS	OPTIONS
MV	10	90	SM3	XXX	XXX
1	2	3	4	5	5

1	Series
MV	Micro-Vane

2	Torque
1	One Inch Pound

3	Rotation
90	Rotation
180	Rotation
270	Rotation

4	Ports
E	M3 Tapped End Ports
S	10-32 Tapped Side Ports
SM3	M3 Tapped Side Ports

5	Options
100	Flange
Switch Options	
A00	Switch Pkg. - No Switches
A02	Switch Pkg. - 2 Reed Switches
A05	Switch Pkg. - 2 Sourcing Switches
A08	Switch Pkg. - 2 Sinking Switches

Table of Contents



Comp-Act pg. 2

- Torque outputs from 9 in. lbs. to 100 in. lbs.
- Rotations from 0 to 270.



Turn-Act pg. 6

- Torque outputs from 87 in. lbs. to 1000 in. lbs.
- Rotations from 0 to 270.



Brute pg. 10

- Torque outputs from 400 in. lbs. to 5200 in. lbs.
- Rotations from 0 to 290.



Micro-Vane pg. 40

- Torque output of 1.4 in. lbs.
- Rotations of 90, 180 & 270.

Options

Flange.....	pgs. 14-15
Side Angle Mounts.....	pg. 16
Extended Tie Rods.....	pg. 17
Side Mounts.....	pg. 18
Dowel Pin Locator.....	pg. 19
Three Hole Face Mount and Low Profile Actuators.....	pg. 20
Adjustable Stroke Control.....	pg. 21
Thrust Protection.....	pg. 22
Internal Rotation Stop.....	pg. 23
Urethane Bumpers.....	pg. 23
Motion Control Package.....	pg. 23
Switches.....	pgs. 24-29
Potentiometers & Encoders.....	pg. 29
Port Locations/Types.....	pg. 30
Namur Mount.....	pg. 30
Gerotor Hydraulic Power Unit.....	pg. 31
Shaft Modifications.....	pgs. 32-33
Shaft Accessories.....	pgs. 34-35
Three Position Actuator Systems.....	pg. 36
Stainless Steel Actuators.....	pg. 37
Hydraulic Service Rotary Actuators.....	pg. 37
Actuators for Special Environments.....	pg. 37
Clean Series.....	pg. 38
Systems.....	pg. 39

Comp-Act (CA) Series

ROTARY VANE ACTUATORS:

- 15 base models with torque outputs from 9 in. lbs. to 100 in. lbs.
- Rotations 90, 180 & 270 degrees.

As compared to other rotary devices... Turn-Act Vane Actuators have:

- One moving part providing:
 - ZERO Backlash.
 - No loss of motion.
 - Smooth Rotation.
 - Precise Repeatability.
 - Continuous full torque throughout rotation.
- Turn-Act Patented Urethane seals for:
 - Long cycle life and Non-lube service.
 - Actual applications with 25 million cycles and more.
- 100s of standard options and modifications.

Just imagine... How TURN-ACT Answer Engineering can work for you!



**COMP-ACT ACTUATOR
WITH OPTIONAL ADJUSTABLE
STROKE CONTROL**

Torque Chart (IN. LBS.)			
180° and 270° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
011	9	7	5
013			
021	13	10	8
023			
031	25	20	15
033			
041	32	26	19
043			
061	50	40	30
063			

Torque Chart (IN. LBS.)			
90° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
012	17	14	10
022	32	26	19
032	44	35	26
042	60	48	36
062	100	80	60

SPECIFICATIONS

Unit Materials

Stator/Rotor Seals..Urethane
 Shaft/Tube Seals.....Buna¹
 Shaft.....303 Stainless Steel
 Body.....Anodized Alum.
 Bearings.....Full Comp. Needle

Miscellaneous

Inlets ...1/8 NPT
 Min. Pressure.....35 psi
 Max. Pressure..... 200 psi
 Cylinder Bore1-1/4"

Shaft Load Capacities

Max. Side Load.....250 lbs.
 Max. End Load10 lbs.

Temperature Range

-20°F to 180°F. Consult factory for higher temperature.

Filtration

Air.....25-50 microns

Cycle Rates³

Max. non-lubed rate:

90° Rot.....40 cpm
 180°, 270° Rot.....20 cpm

Max. lubed rate:
 Consult Factory

Rotary Motion Backlash

All models0 degree

Leak Rates

Air.....4 cfm or less@100 psi

- 1 Viton Optional
- 2 All rotations are nominal +4/-0 actual
- 3 Cycle = Start position to end of rotation and returning to the start position.
Stroke = 1/2 cycle

Capacity per Stroke ³ (IN ³)			
270° Rotation ²		90° Rotation ²	
011	0.50	012	0.42
021	0.99	022	0.84
031	1.49	032	1.26
041	1.99	042	1.68
061	3.49	062	2.96

Weights (OZs)			
270° Rotation ²		90° Rotation ²	
011	8	012	8
021	10	022	10
031	12	032	12
041	14	042	14
061	18	062	18

How to Order: Comp-Act (CA)

MODEL END CAPS SHAFT UNIT MATERIAL OPTIONS OPTIONS

011 - 1 Y 1 - XXX - XXX

1 2 3 4 5 5

1 Model

Model	Series	Torque	Rotation
011	CA	09	270
012	CA	17	90
013	CA	09	180
021	CA	13	270
022	CA	25	90
023	CA	13	180
031	CA	25	270
032	CA	44	90
033	CA	25	180
041	CA	32	270
042	CA	60	90
043	CA	32	180
061	CA	50	270
062	CA	100	90
063	CA	50	180

2 End Caps
To Specify other modifications; Consult Factory

1	Pneumatic
2	Pneumatic - Low Profile
4	Pneumatic - w/ Vacuum Ports

3 Shaft
To Specify other modifications; Consult Factory

Y	Single End - No Keyway
M	Double End - No Keyway Each End
W	Single End - Woodruff Key
V	Double End - Woodruff Key Each End
U	Single End - Shaft Flat
T	Double End - Shaft Flat Each End
S	Single End - Keyway
R	Double End - Keyway Each End

4 Unit Materials
Shaft - Body - Trim

1	303 Stainless Steel - Anodized Aluminum - Carbon Steel
3	303 Stainless Steel - Anodized Aluminum - Stainless Steel
4	303 Stainless Steel - Stainless Steel - Stainless Steel
6	316 Stainless Steel - 316 Stainless Steel - Stainless Steel

5 Options
Additional options available on pgs. 14-33

000	No Options
100	Flange Mount - Rod End
101	Flange Mount - Cap End
300	Extended Tie Rods - Rod End
301	Extended Tie Rods - Cap End
400	Adjustable Stroke Control - Cap End, Pos.5
401	Adjustable Stroke Control - Rod End, Pos.1
801	Side Mounts - Positions 2 & 6
803	Side Mounts - Positions 4 & 8
804	Side Mounts - Positions 2,4,6 & 8
900	Thrust Protection - Cap End, Pos.1
901	Thrust Protection - Rod End, Pos.1
B00	Urethane Bumpers
T01	3/8" Trantorque® Shaft Coupler - Carbon Steel
T02	3/8" Trantorque® Shaft Coupler - Stainless Steel Stainless Shaft Coupler has 1/3 the Transmissible Torque as T01 (see pgs. 34-35)


Switch Options
Additional switch options available on pg. 24
All Axx Switch Options are Single End Only

A00	Switch Package - No Switches
A02	Switch Pkg. - 2 Reed Switches
A05	Switch Pkg. - 2 Sourcing Switches
A08	Switch Pkg. - 2 Sinking Switches

Double end switch options available on pgs. 25-26


Dimensional Data: Comp-Act (CA)

Basic Dimensions

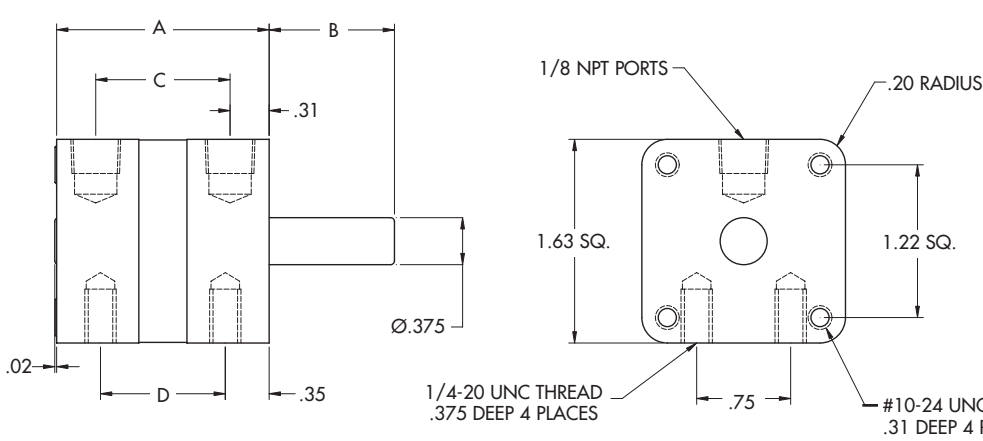


Dimensional Specifications				
Actuator	A	B	C	D
01X	1.70	1.00	1.07	1.00
02X	2.20	1.00	1.57	1.50
03X	2.70	1.00	2.07	2.00
04X	3.20	1.00	2.57	2.50
06X	4.75	1.00	4.12	4.05


Shaft Options

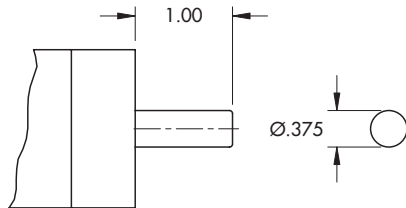


Basic Shaft

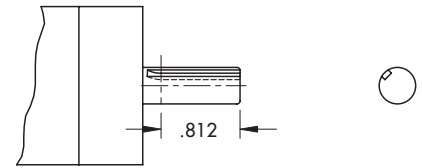


$3/32$ " Square Keyway

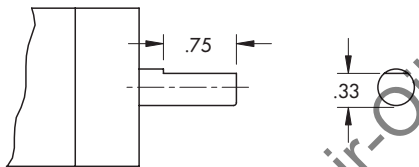


Shaft Flat

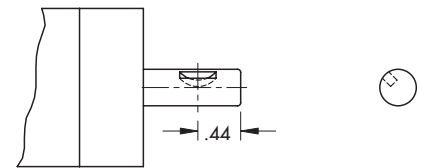


#303 Woodruff Key

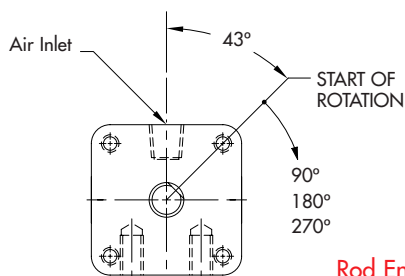

Rod End View



Port & Mounting Position References

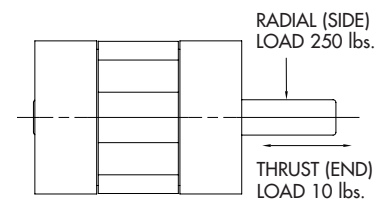

Shaft Load Capacity


NOTE: The 43° start position is nominal. Tolerances are +/- 2 degrees.

Can You Imagine...

ANSWER ENGINEERING®

The ability to rapidly and accurately modify our products to better meet the requirements of your application.

Frequently, a simple modification; a shorter shaft, a relocated mounting hole or perhaps a change in port size, results in an actuator that will better fit your application. To modify most other manufacturers products is time consuming and expensive. Turn-Act's manufacturing processes are designed to address rapid, accurate, and cost effective production of custom modified rotary actuators.

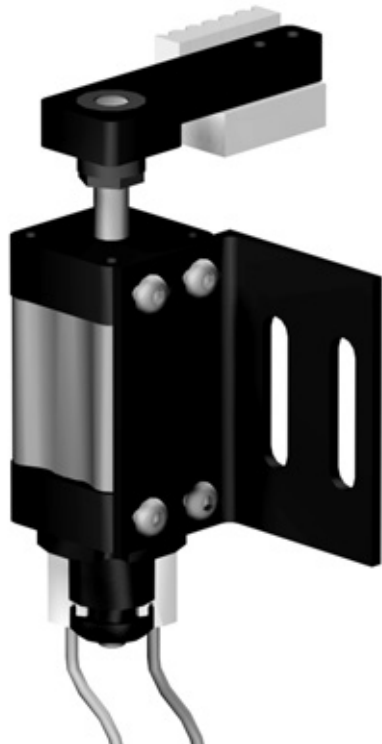

Imagine... Clean Room Application

To address the demanding requirements of a clean room application, Turn-Act designed and produced a Conveyor stop sub-assembly.

This assembly consists of:

- 60 in. lbs. 90° rotary actuator
- An adjustable mounting bracket designed to integrate with the conveyor rail
- Stop Arm
- Trantorque™ shaft coupling
- Arm end-effector to interface with conveyed product

The purchase of this sub-assembly resulted in cost reductions for the customer by eliminating and minimizing:

- Design costs
- Fabrication costs
- Assembly/Install costs
- Inventory costs

THIS IS... Turn-Act Answer Engineering®

Imagine... Medical Application


To contend with the repeatability and space constraints of a small desktop medical analysis device, Turn-Act designed and produced this SPECIAL Actuator Assembly.

This assembly consists of:

- 60 in. lbs. 90° rotary actuator
- Combined rod head and flange mount
- Shaft modification included:
 - Extended length
 - Turn down
 - Threaded end
 - Cross drilled hole
 - Assembly of a shaft bushing and cross pin
- Special switch system and connectors
- Preset adjustable stroke control

Cost reduction is always a priority, however this application had the additional constraints of size and a need for 100% repeatability. Turn-Act provided a product that met all of these requirements.

THIS IS... Turn-Act Answer Engineering®

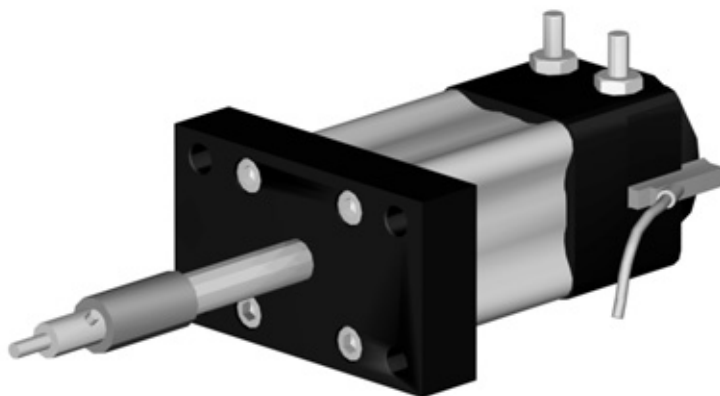

Turn-Act® (TA) Series


ROTARY VANE ACTUATORS:

- 16 base models with torque outputs from 87 in. lbs. to 1000 in. lbs.
- Rotations 45, 90, 180 & 270 degrees.

As compared to other rotary devices... Turn-Act Vane Actuators have:

- One moving part providing:
 - ZERO Backlash.
 - No loss of motion.
 - Smooth Rotation.
 - Precise Repeatability.
 - Continuous full torque throughout the rotation.
- Patented Urethane seals for:
 - Long cycle life and Non-lube service.
 - Actual applications with 25 million cycles and more.
- 100s of standard options and modifications.

Just imagine... How TURN-ACT Answer Engineering can work for you!

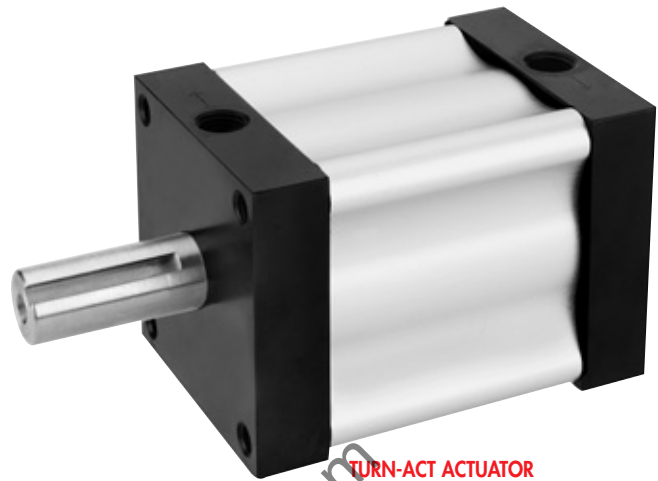

TURN-ACT ACTUATOR
NO OPTIONS SELECTED

Torque Chart (IN. LBS.)			
180° and 270° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
111	87	70	52
113			
121	175	140	105
123			
131	350	280	210
133			
141	500	400	300
143			

Torque Chart (IN. LBS.)			
45° AND 90° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
112	175	140	105
114			
122	350	280	210
124			
132	700	560	420
134			
142	1000	800	600
144			

SPECIFICATIONS

Unit Materials

Stator/Rotor Seals..Urethane
 Shaft/Tube Seals.....Buna¹
 Shaft.....1 1/4 Steel
 Body.....Anodized Alum.
 Bearings....Full Comp. Needle

Miscellaneous

Inlets.....1/4 NPT
 Min. Pressure.....35 psi
 Max. Pressure.....200 psi⁴
 Cylinder Bore.....2-1/2"

Shaft Load Capacities

Max. Side Load.....500 lbs.
 Max. End Load.....25 lbs.

Temperature Range

-20°F to 180°F. Consult factory for higher temperature.

Filtration

Air.....25-50 microns
 Hydraulic.....10-25 microns

Cycle Rates

Max. non-lubed rate:
 45°, 90° Rot.....40 cpm
 180°, 270° Rot.....20 cpm

Max. lubed rate:
 Consult Factory

Rotary Motion Backlash

All models0 degree

Leak Rates

Air.....4 cfm or less @ 100 psi
 Hydraulic..0.5 cfm @ 500 psi

Hydraulic Service


Use of paraffin based hydraulic oil is recommended. DO NOT USE skydrol, brake fluid, water based fluid, S or F type automatic transmission fluid.

- 1 Viton Optional
- 2 All rotations are nominal +4/-0 actual
- 3 Cycle = Start position to end of rotation and returning to the start position.
Stroke = 1/2 cycle
- 4 Pressure Rating for 11X and 12X is 500psi max.

Capacity per Stroke ³ (IN ³)			
270° Rotation ²		90° Rotation ²	
111	4.52	112	2.75
121	8.50	122	5.50
131	17.00	132	11.00
141	27.50	142	16.70

Weights (LBS.)			
270° Rotation ²		90° Rotation ²	
111	2.5	112	2.5
121	3.3	122	3.3
131	6.0	132	6.0
141	9.3	142	9.3

How to Order: Turn-Act® (TA)

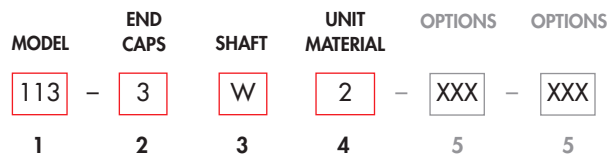

1 Model

Model	Series	Torque	Rotation
111	TA	87	270
112	TA	175	90
113	TA	87	180
114	TA	175	45
121	TA	175	270
122	TA	350	90
123	TA	175	180
124	TA	350	45
131	TA	350	270
132	TA	700	90
133	TA	350	180
134	TA	700	45
141*	TA	500	270
142*	TA	1000	90
143*	TA	500	180
144*	TA	1000	45

* These models require '2' or '5' for the selection in block #4 "Unit Materials".

2 End Caps
To Specify other modifications; Consult Factory

1	Pneumatic
2	Pneumatic - Low Profile
3	Pneumatic - w/ Drain Ports
4	Pneumatic - w/ Vacuum Ports

3 Shaft
To Specify other modifications; Consult Factory

Y	Single End - No Keyway
M	Double End - No Keyway Each End
W	Single End - Woodruff Key
V	Double End - Woodruff Key Each End
U	Single End - Shaft Flat
T	Double End - Shaft Flat Each End
S	Single End - Keyway
R	Double End - Keyway Each End
G	Single End With Manual Override

4 Unit Materials
Shaft - Body - Trim


1	1144 Carbon Steel - Anodized Aluminum - Carbon Steel
2	Hardened Carbon Steel - Anodized Aluminum - Carbon Steel
3	303 Stainless Steel - Anodized Aluminum - Stainless Steel
4	303 Stainless Steel - 303 Stainless Steel - Stainless Steel
5	Hardened 440 SS - Anodized Aluminum - Stainless Steel
6	316 Stainless Steel - 316 Stainless Steel - Stainless Steel

5 Options
Additional options available on pgs. 14-33


000	No Options
100	Flange Mount - Rod End
101	Flange Mount - Cap End
200	Side Angle Mounting Brackets - Mounting Surface 3 & 7
300	Extended Tie Rods - Rod End
301	Extended Tie Rods - Cap End
320	Extended Tie Rods - Both Ends
400	Adjustable Stroke Control - Cap End, Pos.5
401	Adjustable Stroke Control - Rod End, Pos.1
500	Electrical Position Indicator - Cap End, Pos. 5
704	Teflon Impregnated Hard Anodized
801	Side Mounts - Positions 2 & 6
803	Side Mounts - Positions 4 & 8
804	Side Mounts - Positions 2, 4, 6 & 8
900	Thrust Protection - Cap End, Pos.1
901	Thrust Protection - Rod End, Pos.1
B00	Urethane Bumpers
T01	3/4" Trantorque® Shaft Coupler - Carbon Steel
T02	3/4" Trantorque® Shaft Coupler - Stainless Steel
Stainless Shaft Coupler has 1/3 the Transmissible Torque as T01 (see pgs. 34-35)	
Switch Options Additional switch options available on pg. 24 All Axx Switch Options are Single End Only	
A00	Switch System -No Switches
A02	Switch System -2 Reed Switches
A05	Switch System -2 Sourcing Switches
A08	Switch System -2 Sinking Switches
Double end switch options available on pgs. 25-26	

Dimensional Data: Turn-Act® (TA)


Basic Dimensions

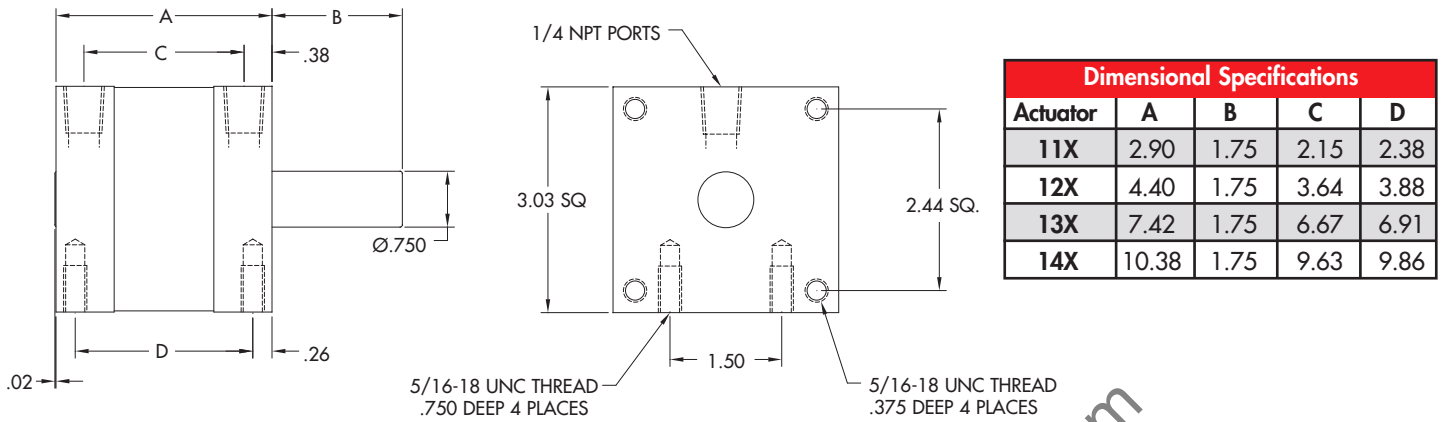


Shaft Options

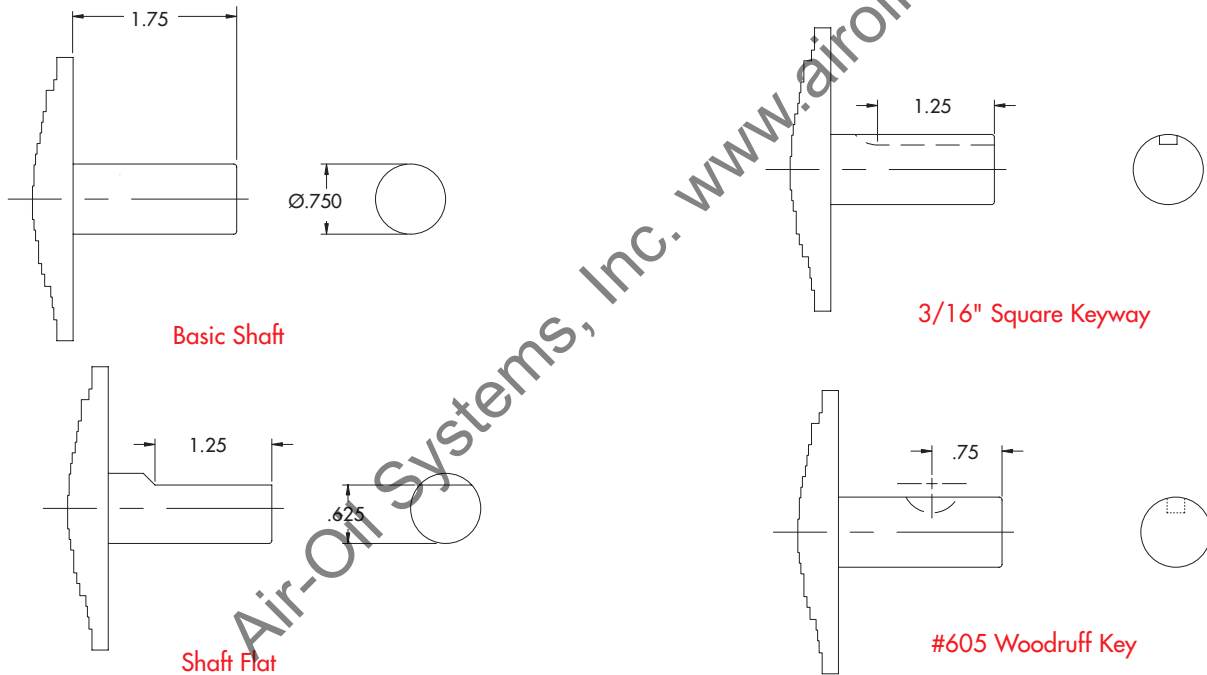


NOTE: Center drill omitted from shaft details for clarity.

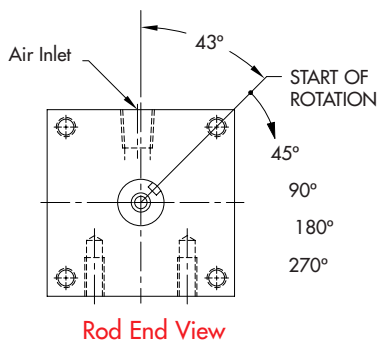

Nominal Rotations (+4/-0 actual)



Port & Mounting Position References

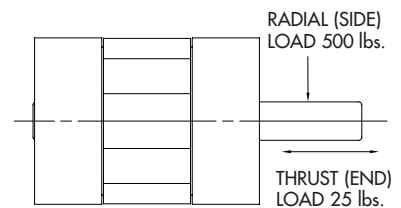

Shaft Load Capacity


NOTE: The 43° start position is nominal. Tolerances are +/- 2 degrees.

Can You Imagine...

ANSWER ENGINEERING®

The ability to rapidly and accurately modify our products to better meet the requirements of your application.

Frequently, a simple modification; a shorter shaft, a relocated mounting hole or perhaps a change in port size, results in an actuator that will better fit your application. To modify most other manufacturers products is time consuming and expensive. Turn-Act's manufacturing processes are designed to address rapid, accurate, and cost effective production of custom modified rotary actuators.

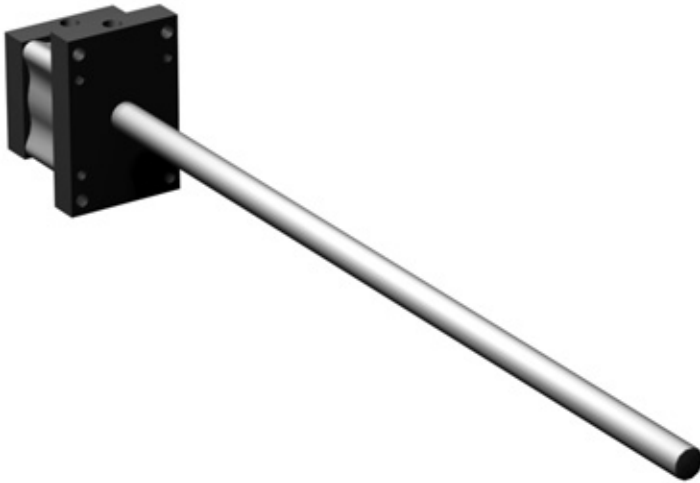

Imagine... Vibratory Conveyor Diverter Application


To meet the demanding requirements of a 24-hour 7-day a week vibrating conveyor application, Turn-Act developed this SPECIAL Actuator.

This assembly consists of:

- 175 in. lbs. 90° rotary actuator
- Combined rod head and flange mount with special port location
- Shaft modified to 32" overall length

Reduced cost was the primary goal of this modified actuator. The simple shaft extension allowed for the elimination of a secondary shaft, shaft coupling, shaft bearing, brackets and the labor associated with assembling and aligning these components. This system of fewer parts and connections results in a more reliable and cost effective system.

THIS IS... Turn-Act Answer Engineering®

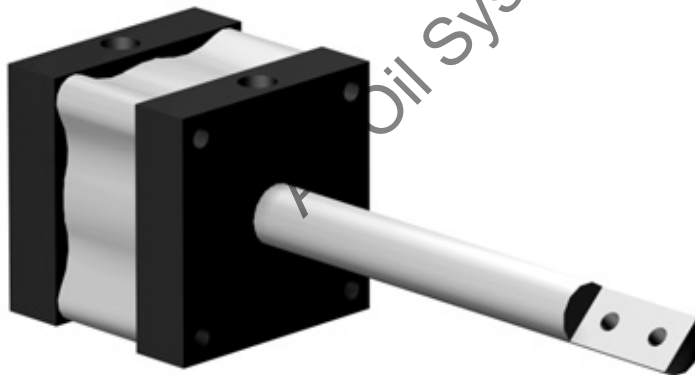

Imagine... Abrasive/High Particulate Environment

Some of the most abusive environments can be found in the paper, wood products, bakery, and foundry industries. Migrating particulates can be the cause of premature equipment failure in these applications.

To address these environmental issues, Turn-Act developed this SPECIAL Actuator.

This assembly consists of:

- 175 in. lbs. 90° rotary actuator
- Shaft modification included:
 - 6" Extended length with a 1.5" flat
 - Tapped holes for end effector attachment
- Rod Seal – modified for abusive environments
- Blind cap head

Improved actuator life and system cost reductions were the primary goals of this modified actuator. Overall, the design provided extended cycle life by limiting particulate entry points and reduced costs associated with assembling the components.

THIS IS... Turn-Act Answer Engineering®

Brute (BR) Series

ROTARY VANE ACTUATORS:

- 25 base models with torque outputs from 400 in. lbs to 5200 in. lbs.
- Standard rotations 90, 110, 180, 270, & 290 degrees.

As compared to other rotary devices... Turn-Act Vane Actuators have:

- One moving part providing:
 - ZERO Backlash.
 - No loss of motion.
 - Smooth Rotation.
 - Precise repeatability.
 - Continuous full torque throughout the rotation.
- Patented Urethane seals for:
 - Long cycle life and Non-Lube service.
 - Actual applications with 25 million cycles and more.
- 100s of standard options and modifications.

Just imagine... How TURN-ACT Answer Engineering can work for you!



**BRUTE SERIES ACTUATOR
WITH OPTIONAL ADJUSTABLE
STROKE CONTROL**

Torque Chart (IN. LBS.)			
180°, 270° and 290° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
221			
223	400	320	240
225			
231			
233	750	600	450
235			
241			
243	1300	1040	780
245			
251			
253	1950	1560	1170
255			
261			
263	2600	2080	1560
265			

Torque Chart (IN. LBS.)			
90° and 110° Rotations ²			
Actuator Model	Actuator Torque at		
	100 PSI	80 PSI	60 PSI
222			
226	800	640	480
232			
236	1500	1200	900
242			
246	2600	2080	1560
252			
256	3900	3120	2340
262			
266	5200	4160	3120

SPECIFICATIONS

Unit Materials

Stator/Rotor Seals...Urethane
 Shaft/Tube Seals.....Buna'
 Shaft.....1144 Steel
 Body..... Anodized Alum.
 Bearings....Radial Ball Thrust

Miscellaneous

Inlets.....3/8 NPT
 Min. Pressure.....15 psi
 Max. Pressure.....200 psi
 Cylinder Bore.....5"

Shaft Load Capacities

Max. Side Load.....2000 lbs.
 Max. End Load.....1000 lbs.

Temperature Range

-20°F to 180°F. Consult factory for higher temperature.

Filtration

Air.....25-50 microns
 Hydraulic.....10-25 microns

Leak Rates

Air...less than 8 cfh@100 psi

Cycle Rates

Max. non-lubed rate:
 Double Vane.....20 cpm
 Single Vane.....10 cpm

Max. lubed rate:
 Consult Factory

Rotary Motion Backlash

All models.....0 degree

Hydraulic Service


Use of paraffin based hydraulic oil is recommended. DO NOT USE skydrol, brake fluid, water based fluids, or F type automatic transmission fluid.

- 1 Viton Optional.
- 2 All rotations are nominal +4/-0 actual.
- 3 Cycle = Start position to end of rotation and returning to the start position.
Stroke = 1/2 cycle

Capacity per Stroke ³ (IN ³)			
270° Rotation ²		90° Rotation ²	
221	23.9	222	19.3
231	48.5	232	38.5
241	82.0	242	66.0
251	123.0	252	100.0
261	164.0	262	132.0

Weights (LBS.)			
270° Rotation ²		90° Rotation ²	
221	13	222	13
231	16	232	16
241	23	242	23
251	30	252	30
261	36	262	36

How to Order: Brute (BR)

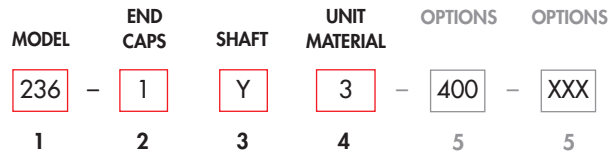

1

Model			
Model	Series	Torque	Rotation
221	BR	400	270
222	BR	800	90
223	BR	400	180
225	BR	400	290
226	BR	800	110
231	BR	750	270
232	BR	1500	90
233	BR	750	180
235	BR	750	290
236	BR	1500	110
241	BR	1300	270
242	BR	2600	90
243	BR	1300	180
245	BR	1300	290
246	BR	2600	110
251	BR	1950	270
252	BR	3900	90
253	BR	1950	180
255	BR	1950	290
256	BR	3900	110
261	BR	2600	270
262	BR	5200	90
263	BR	2600	180
265	BR	2600	290
266	BR	5200	110

2

End Caps	
To Specify other modifications; Consult Factory	
1	Pneumatic - Black Anodized
3	Hydraulic - Black Anodized - Drain Ports
4	Pneumatic - Black Anodized - Vacuum Port

3

Shaft	
To Specify other modifications; Consult Factory	
Y	Single End - No Keyway
M	Double End - No Keyway Each End
W	Single End - Woodruff Key
V	Double End - Woodruff Key Each End
S	Single End - Keyway
R	Double End - Keyway Each End

4


Unit Materials	
Shaft - Body - Trim	
1	1144 Carbon Steel - Anodized Aluminum - Carbon Steel
3	303 Stainless Steel - Anodized Aluminum - Stainless Steel
4	303 Stainless Steel - 303 Stainless Steel - Stainless Steel
6	316 Stainless Steel - 316 Stainless Steel - Stainless Steel

5

Options	
Additional options available on pgs. 14-33	
000	No Options
100	Flange Mount - Rod End
101	Flange Mount - Cap End
300	Extended Tie Rods - Rod End
301	Extended Tie Rods - Cap End
401	Adjustable Stroke Control - Rod End, Pos.1
501	Electrical Position Indicator - Rod End, Pos.1
704	Teflon Impregnated Hard Anodizing
801	Side Mounts - Positions 2 & 6
803	Side Mounts - Positions 4 & 8
804	Side Mounts - Positions 2,4,6 & 8
B00	Urethane Bumpers
T01	1-1/4" Trantorque® Shaft Coupler - Carbon Steel
T02	1-1/4" Trantorque® Shaft Coupler - Stainless Steel Stainless Shaft Coupler has 1/3 the Transmissible Torque as T01 (see pgs. 34-35)
Switch Options	
Additional switch options available on pg. 24	
All Axx Switch Options are Single End Only	
A00	Switch Package - No Switches
A02	Switch Pkg. - 2 Reed Switches
A05	Switch Pkg. - 2 Sourcing Switches
A08	Switch Pkg. - 2 Sinking Switches
Double end switch options available on pgs. 25-26	


Dimensional Data: Brute (BR) Series

BRUTE (BR) Series

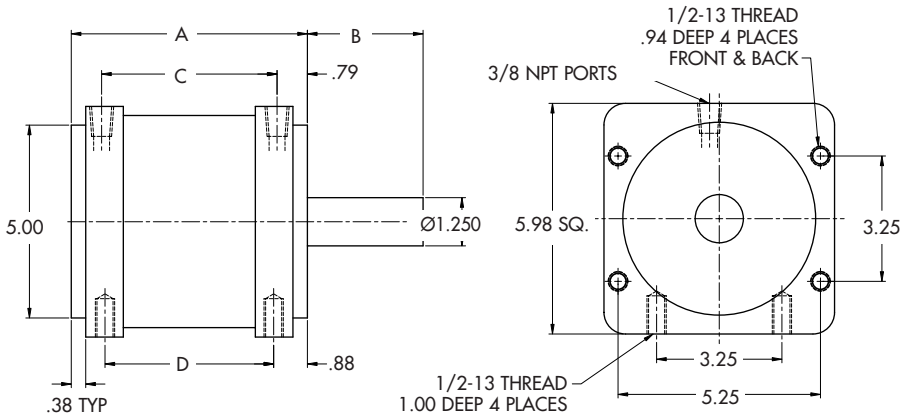


Dimensional Specifications				
Actuator	A	B	C	D
22X	4.37	3.00	2.80	2.62
23X	6.12	3.00	4.55	4.37
24X	8.62	3.00	7.05	6.87
25X	11.64	3.00	10.07	9.89
26X	14.64	3.00	13.07	12.89


SHAFT OPTIONS

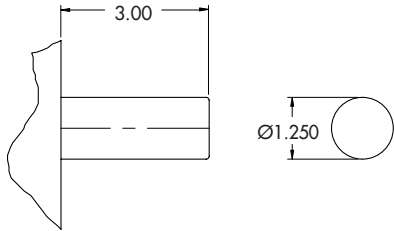

Basic Shaft




1/4" Square Keyway

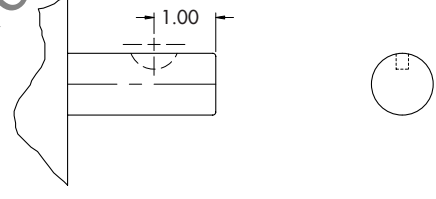


#808 Woodruff Key


NOTE: Center drill omitted from shaft details for clarity.

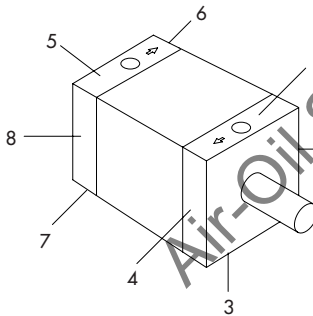

Port & Mounting Position References

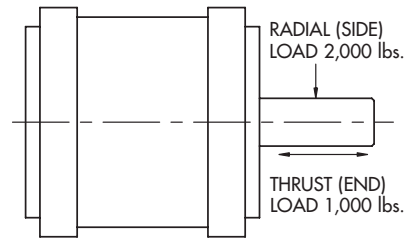


Shaft Load Capacity

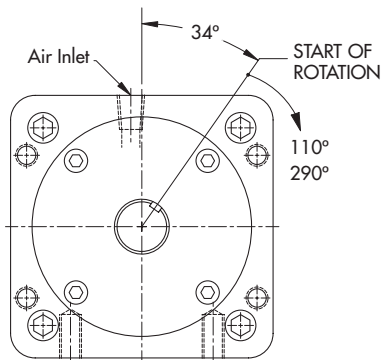

Nominal Rotations (+4/-0 actual)

Rod End Views

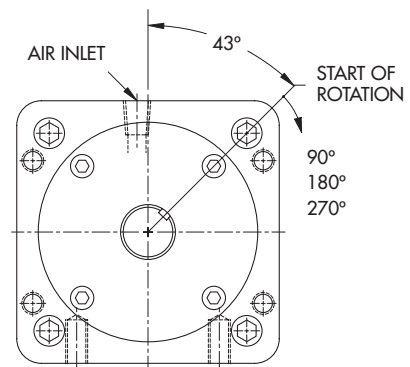

Nominal Rotations (+4/-0 actual)


NOTE: The 34° and 43° start position are nominal. Tolerances are +/- 2 degrees.

Can You Imagine...

ANSWER ENGINEERING®

The ability to rapidly and accurately modify our products to better meet the requirements of your application.

Frequently, a simple modification; a shorter shaft, a relocated mounting hole or perhaps a change in port size, results in an actuator that will better fit your application. To modify most other manufacturers products is time consuming and expensive. Turn-Act's manufacturing processes are designed to address rapid, accurate, and cost effective production of custom modified rotary actuators.

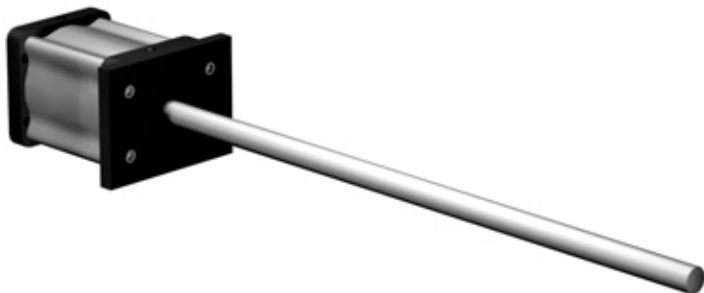

Imagine... Product Transfer Application

Consistent around the clock throughput is critical to a profitable plastics molding operation. Turn-act developed this SPECIAL Actuator to meet the needs of the high speed mold sweep application.

This unit consists of:

- 2600 in. lbs. 110° rotation
- Shaft modification:
 - 33" Extended length

Long cycle life, repeatability, and cost per cycle are the prime considerations of this modified actuator. The simple shaft extension allowed the elimination of a secondary shaft, shaft coupling, shaft bearing and brackets. Fewer component parts produced a more reliable and repeatable system while reducing the final installed cost.

THIS IS... Turn-Act Answer Engineering®



Imagine... Food Process/Wash down Application

Food contact and caustic wash down are some of the parameters that must be addressed when designing machinery for the food industry. Turn-Act developed this Special Actuator for this type of manufacturing environment.

This unit consists of:


- 2600 in. lbs. 180° rotation
- Stainless shaft and fasteners
- Heads sealed for wash down
- Shaft modification included:
 - Double end, extended length with ground tolerances to run in an external bearing set.
- Teflon® impregnated hard anodizing for caustic washdown

Improved actuator life and system cost reductions were the primary goals of this modified actuator. Overall, the design provided extended cycle life by limiting wash fluid entry points and reduced costs associated with assembling the components.

THIS IS... Turn-Act Answer Engineering®


Options- Flange Mount

COMP-ACT (CA) Series

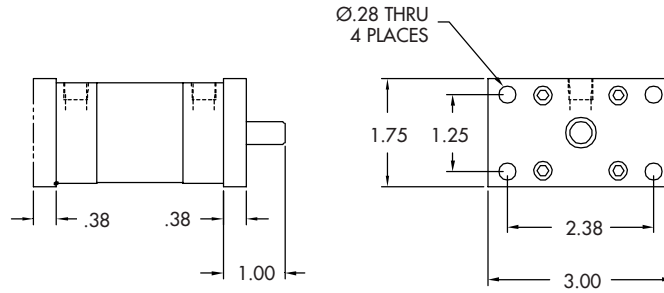


NOTE: Side Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 4.

TURN-ACT (TA) Series

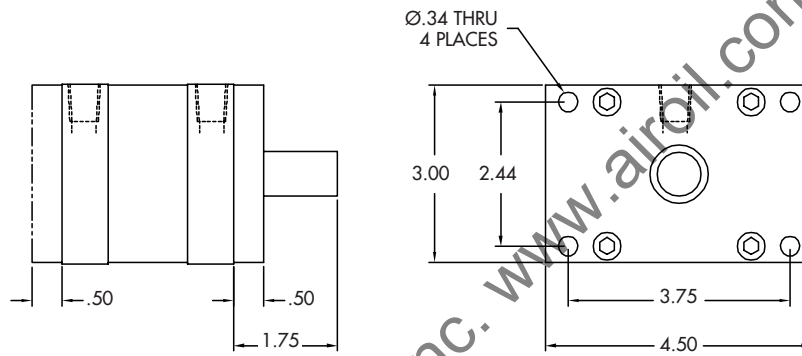

NOTE: Side Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 8.

BRUTE (BR) Series*

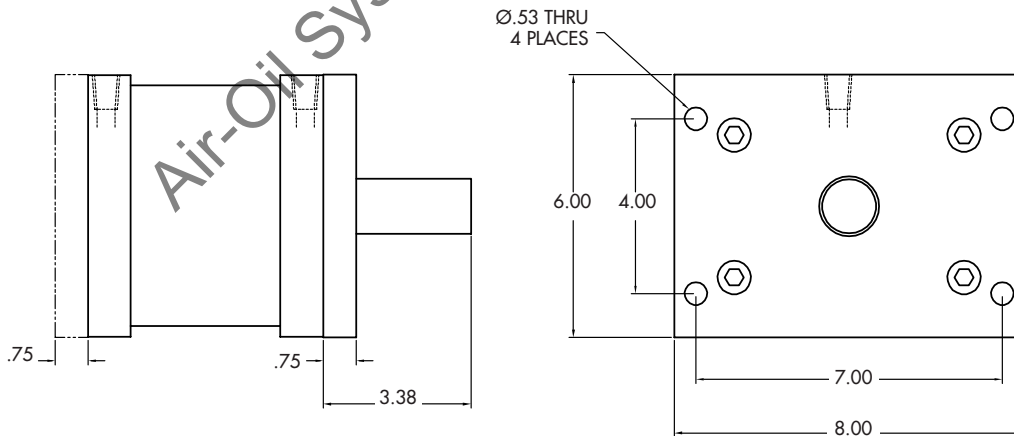

NOTE: The Flange Mount option and Adjustable Stroke Control option may not be ordered on the same end of a unit.


NOTE: Side Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 12.

Option#	Description
100	Front Flange
101	Rear Flange
102	Front and Rear Flange
Front Flange and Front ASC Combined (See page 15)	

*NOTE: When ordering Brute with Flange Mount the bearing retaining plate is eliminated. The flange itself serves as the retainer.


Options- Combination Flange

The flange option can be combined with either head, or the Adjustable Stroke Control housing of the actuator to minimize the overall length of the actuator.

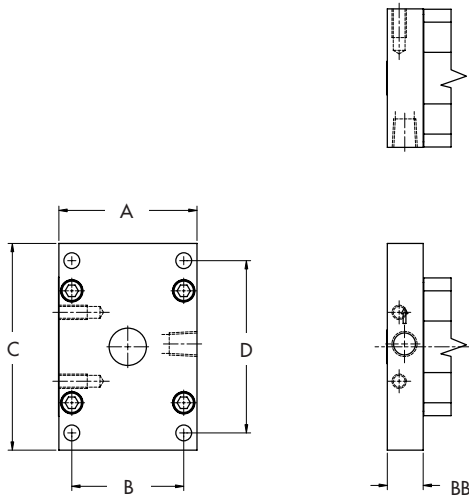

TURN-ACT ACTUATOR WITH INTEGRAL RODHEAD FLANGE OPTION, PORT ON SHORT SIDE.

Combination Flange/Rod Head: Port shown on long side.

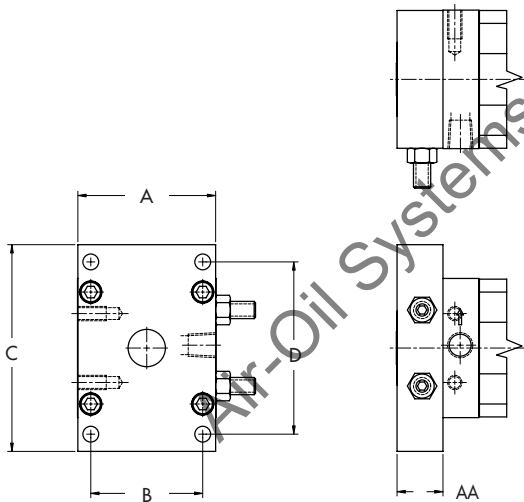

Combo Flanges	Comp-Act (CA) Series	Turn-Act (TA) Series	Brute (BR) Series
A	1.65	3.00	6.00
B	1.25	2.44	4.00
C	3.00	4.50	8.00
D	2.38	3.75	7.00
EE	0.28	0.34	0.53
ASC Flange (AA)	0.656	1.000	1.50
Flange Head (BB)	0.656	0.781	0.975


Combination Flange/Adjustable Stroke Control (ASC) Housing:
The ASC housing and the flange are machined from a single piece of aluminum.

Option #	Description
105	Flange Mount integral with the Adjustable Stroke Control Housing Front Mount.
108	Flange Mount integral with the Adjustable Stroke Control Housing Rear Mount.
110	Flange Mount integral with the Rod Head. Flange positioned with the port on the Short side.
111	Flange Mount integral with the Cap Head. Flange positioned with the port on the Short side.
120	Flange Mount integral with the Rod Head. Flange positioned with the port on the Long side.
121	Flange Mount integral with the Cap Head. Flange positioned with the port on the Long side.

Options- Side Angle Mounts



Option #	Description
200	Side Angle Brackets, Mounting Surface 3 & 7
201	Side Angle Brackets, Mounting Surface 2 & 6
202	Side Angle Brackets, Mounting Surface 4 & 8
203	Side Angle Brackets, Mounting Surface 1 & 5

NOTE: Specify the surface to be used for mounting. Example: Option 200 would call out surface 3 & 7 as the mounting surface, Option #201 would call out surface 2 & 6 as the mounting surface.

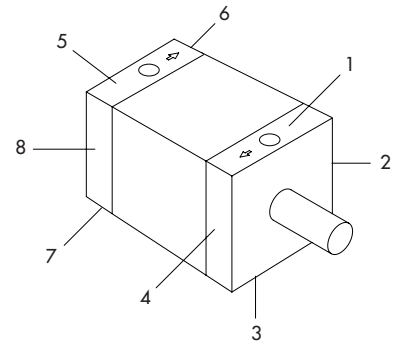

Mounting Surface Reference Drawing



TURN-ACT (TA) Series

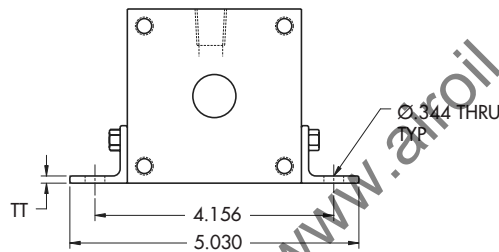

Option 200
Shown in Drawing

Turn-Act Model	A	LL	MM	TT
11X	2.90	1.625	.638	.125
12X	4.39	3.000	.694	.125
13X	7.42	6.000	.712	.125
14X	10.38	9.125	.626	.188

BRUTE (BR) Series

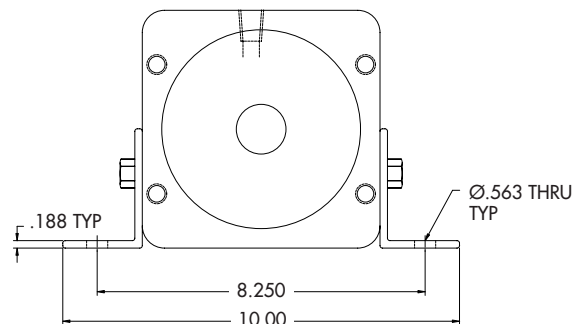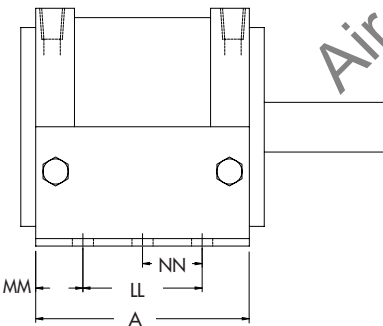

Option 200
Shown in Drawing

Brute Model	A	LL	MM	NN
22X	3.63	1.625	1.000	N/A
23X	5.38	3.375	1.000	N/A
24X	7.88	4.875	1.500	N/A
25X	10.88	7.875	1.500	3.938
26X	13.88	10.875	1.500	5.438


Options- Extended Tie Rods

Option #	Description
300	Extended Tie Rods, Front
301	Extended Tie Rods, Rear
302 ¹	Extended Tie Rods, Front and Rear


NOTE: Tie rod material (Carbon Steel or Stainless Steel) is determined by the Unit Material selected for the base actuator. The Extended Tie Rod option eliminates the standard front mounts.

1. Option 302 is not available on the Comp-Act Series actuators.
Consult Factory for other variations of this option.


COMP-ACT (CA) Series

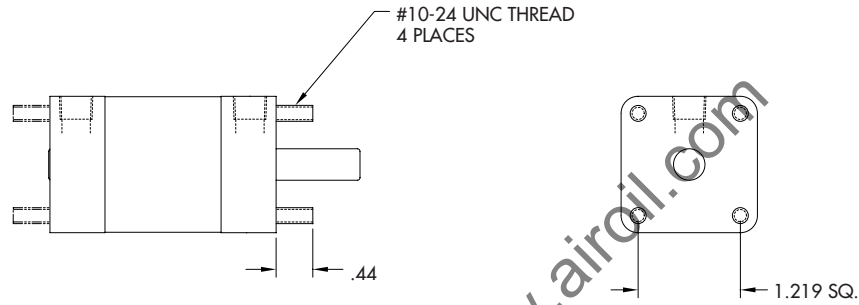

TURN-ACT (TA) Series

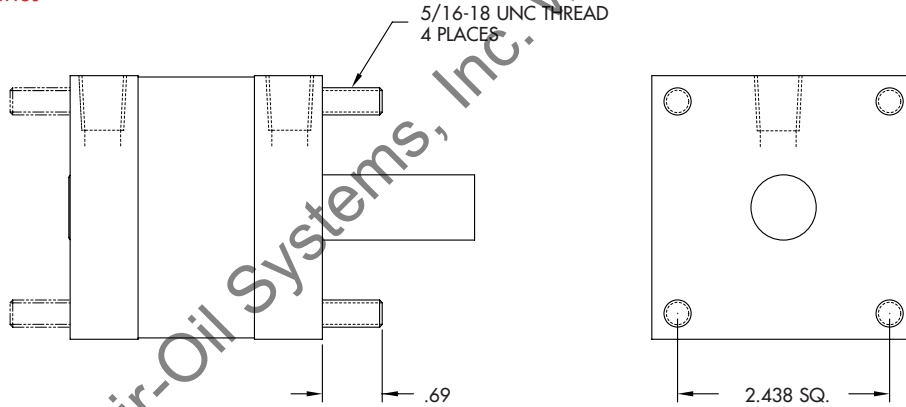


BRUTE (BR) Series

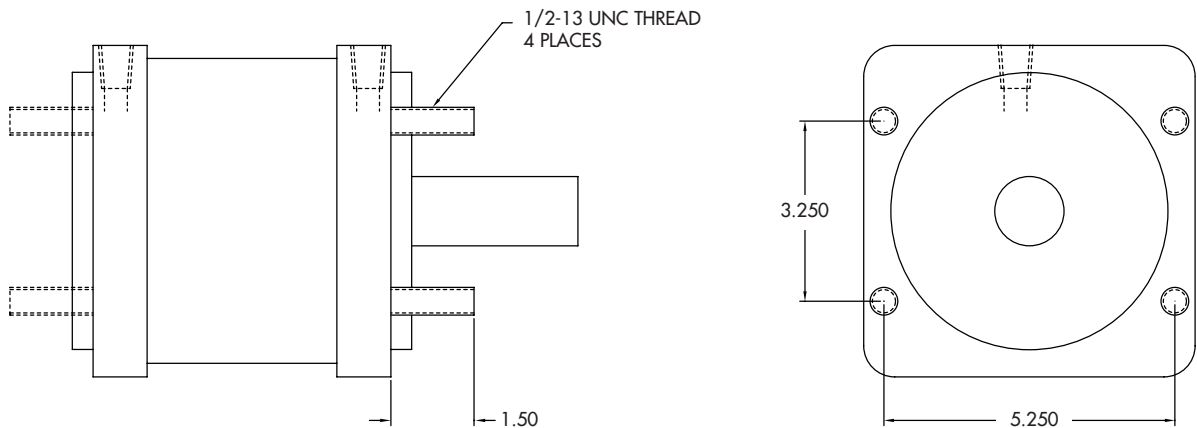

Options- Side Mounts

Option #	Description
SIDE MOUNTS, SIDES 3 & 7 STANDARD ON ALL MODELS	
800	Side Mounts, Sides 1 & 5
801	Side Mounts, Sides 2 & 6
803	Side Mounts, Sides 4 & 8
804	Side Mounts, Sides 2, 4, 6 & 8
806	Side Mounts, Sides 6 & 8
807	Side Mounts, Sides 2 & 4
810	No Side Mounts

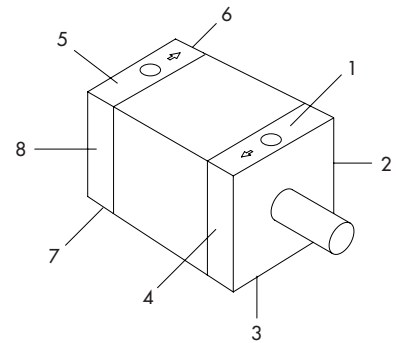


Position Reference Drawing

NOTE: Specify the side to be used for mounting. Example: Option 804 would call out sides 2, 4, 6 & 8 as the mounting surfaces, as depicted in the drawings below. Mount sides 3 & 7 are standard on all models (CA, TA, BR) but are not shown for clarity.

COMP-ACT (CA) Series


Comp-Act Models	D
01X	1.00
02X	1.50
03X	2.00
04X	2.50
06X	4.05

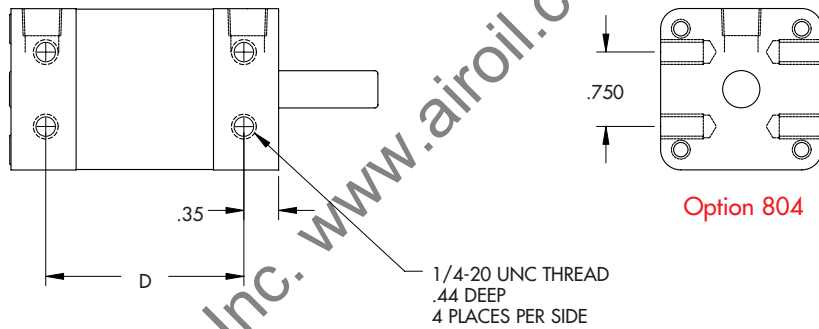

NOTE: Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 4.

TURN-ACT (TA) Series

Turn-Act Models	D
11X	2.38
12X	3.87
13X	6.91
14X	9.86

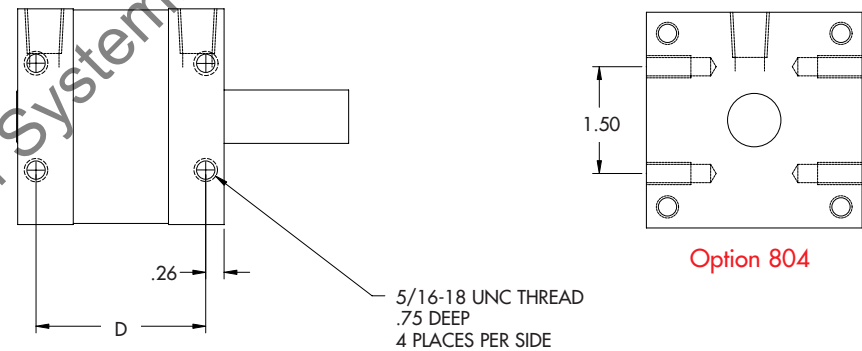


NOTE: Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 8.

NOTE: Center drill omitted from shaft details for clarity.

BRUTE (BR) Series

Brute Models	D
22X	2.63
23X	4.38
24X	6.88
25X	9.88
26X	12.88

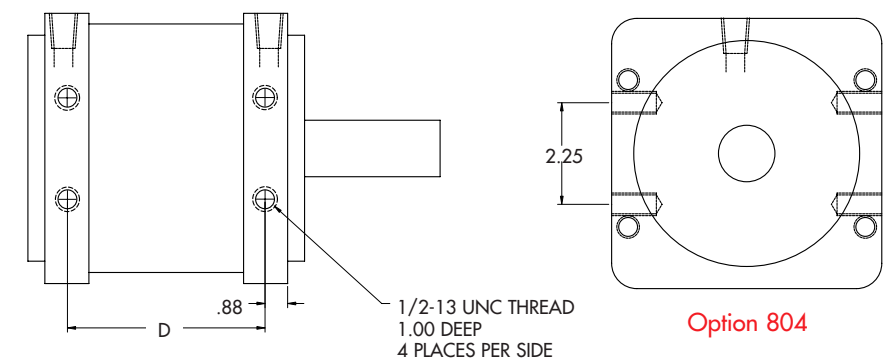

NOTE: Mounts surface 3 & 7 are standard, but are not shown for clarity. Standard Bottom Mount dimensions shown on page 12.


NOTE: Center drill omitted from shaft details for clarity.

Options- Dowel Pin Locators

Option #	Description
805	Dowel Pin Locator, Sides 3 & 7
811	Dowel Pin Locator, Sides 2 & 6
812	Dowel Pin Locator, Sides 4 & 8


COMP-ACT (CA) Series

Comp-Act Models	PP
01X	0.996
02X	1.496
03X	1.996
04X	2.496
06X	4.048

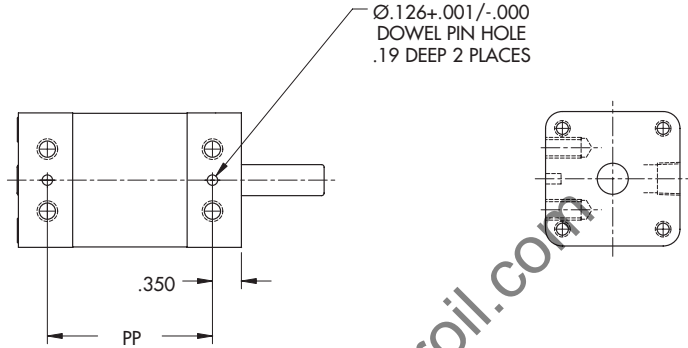

TURN-ACT (TA) Series


Turn-Act Models	PP
11X	2.384
12X	3.877
13X	6.907
14X	9.860

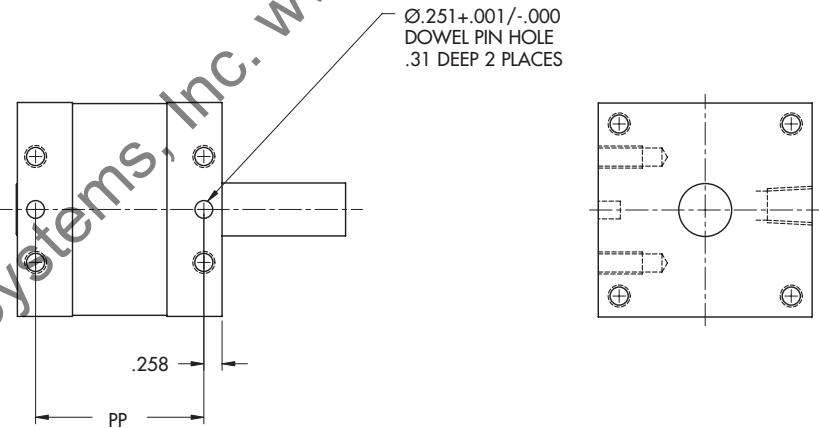

NOTE: Center drill omitted from shaft details for clarity.

BRUTE (BR) Series

Brute Models	PP
22X	2.624
23X	4.374
24X	6.874
25X	9.894
26X	12.894

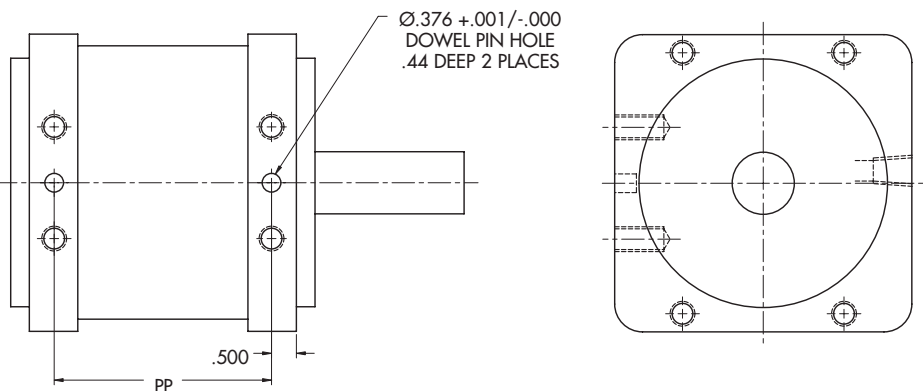


NOTE: Center drill omitted from shaft details for clarity.

Options- Three Hole Face Mount

Option #	Description
830	Three Hole Face Mount


NOTE: Not available in Brute series

TAP #10-32 UNF .38 DP
3 PLCS EQUALLY
SPACED ON Ø1.28 B.C.



COMP-ACT (CA) Series

TAP 5/16-18 UNC .50 DP
3 PLCS EQUALLY
SPACED ON Ø2.44 B.C.



TURN-ACT (TA) Series

Options- Low Profile Actuators

This option provides shorter overall length when available space will not permit the use of standard product. The standard End Caps and Needle Bearings are replaced with "Thinner" End Caps and PTFE Bearing Surfaces. This option requires smaller than standard air inlets. The Low Profile option reduces the side load rating of the actuator to 50lbs. in the Comp-Act Series and 100lbs. in the Turn-Act Series. This option is not available on the Brute Series.




COMP-ACT SERIES ACTUATOR WITH LOW PROFILE HEADS AND TEFLON IMPREGNATED ANODIZING (OPTION 704) WITH SHAFT TURNED DOWN


How to Order	Description
Under the "End Cap" Selection section of the "How to Order" Comp-Act or Turn-Act Series Models – Select #2	Low Profile Actuators

NOTE:
1. Low Profile Heads reduce the side load rating of the actuator. Not available in Brute series.

COMP-ACT (CA) Series

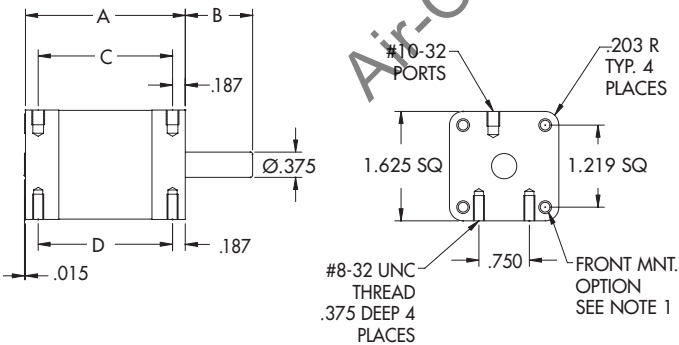

TURN-ACT (TA) Series

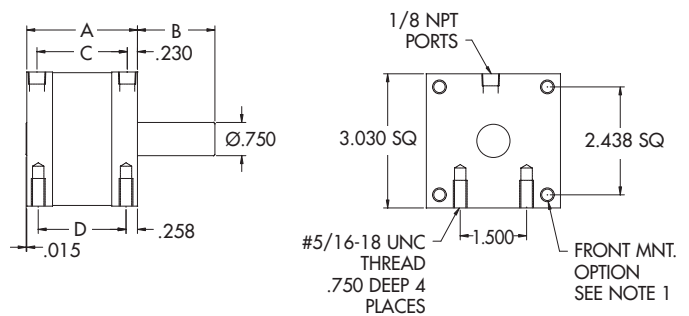


NOTE:
1. Only available with Extended Tie Rods or Combination Flange options. Consult Factory.

Comp-Act Models	A	B	C	D
01X	1.375	1.000	1.000	1.000
02X	1.875	1.000	1.500	1.500
03X	2.375	1.000	2.000	2.000
04X	2.875	1.000	2.500	2.500
06X	4.425	1.000	4.050	4.050

Turn-Act Models	A	B	C	D
11X	2.500	1.750	2.040	1.984
12X	4.000	1.750	3.540	3.484
13X	4.020	1.750	6.560	6.504
14X	9.980	1.750	9.520	9.464

Options- Adjustable Stroke Control (ASC)

The Adjustable Stroke Control (ASC) option allows an actuator to be adjusted to the exact rotational stroke desired. The "ASC" option consists of a shaft mounted steel cam, enclosed in a housing with control screws (see method of operation below). Turning the control screws either extends or limits the amount of rotation. The ends of the control screws impact the cam providing a positive and repeatable end of rotation stop. The ASC option is often specified for applications where the stroke required is not within the rotational tolerance. The standard rotational stroke of an actuator is $+4^{\circ}/-0^{\circ}$. (i.e.: A 90-degree actuator without ASC will have a rotation of $90^{\circ}-94^{\circ}$ with the addition of the ASC option a precise 90° rotation is attainable.).

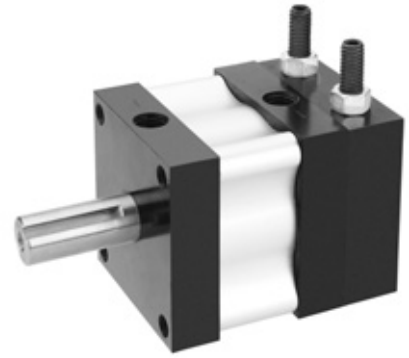

Option #	Description
400	ASC Cap End, Position 5
401	ASC Rod End, Position 1
402	ASC Cap End, Position 6*
403	ASC Rod End, Position 2*
404	ASC Cap End, Position 7
405	ASC Rod End, Position 3
406	ASC Cap End, Position 8*
407	ASC Rod End, Position 4*

* Bottom mnt. pattern changes to side mnt. dimensions (see pg. 18) on ASC end only - Brute Series

NOTE:

1. Contact Factory for other adjusting ranges.
2. The Thrust Protection Option (see pg. 22) can be integrated into the ASC Housing to minimize the overall length of the actuator.

Actuator Rotation	Adjusting Range
*45°	0-45 degrees
90°	0-90 degrees
**110°	0-110 degrees
180°	90-180 degrees
270°	90-270 degrees
**290°	90-290 degrees


* Turn-Act Series Only

** Brute Series Only


NOTE: Rotations greater than 180° are not fully adjustable with a standard 2 screw adjustable stroke control. Consult factory for greater adjustment range.

Adjustable Stroke Control (ASC) Dimension				
MODEL/Series	(A =max) in.	(B) in.	(C) in. Sq.	(D) in.
Comp-Act (CA)	1.500	0.656	1.63	.130
Turn-Act (TA)	3.250	1.000	3.00	.200
Brute (BR)	6.500	1.500	5.98	N/A



POSITION REFERENCE DRAWING

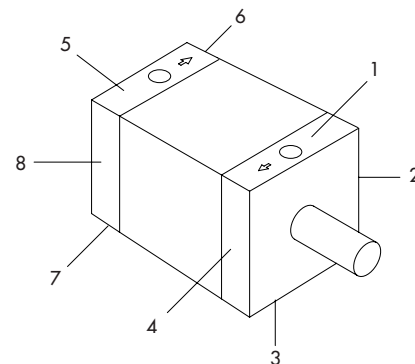

NOTE: Specify the position to be tapped for adjustment screws. Example: Option 407 would call out position 4 as the adjustment screw location, as depicted in the drawing above.



METHOD OF OPERATION




NOTE: FLUSH AVAILABLE CONSULT FACTORY

DIMENSIONAL DATA

Options-Thrust Protection

Standard Turn-Act Rotary actuators are designed to accommodate high side (radial) loads and relatively light end (thrust) loads. Excessive thrust load will cause premature seal wear and shorten actuator cycle life. (See chart below.) Applications that produce high linear/thrust loads, such as when the shaft is vertical, with the load set on or hanging from the shaft may require the Thrust Protection option.

This option consists of a series of internal thrust bearings and a shaft collar enclosed in a machined aluminum housing. This system effectively isolates the load from the actuator vane, permitting higher thrust load limits. (See chart.)



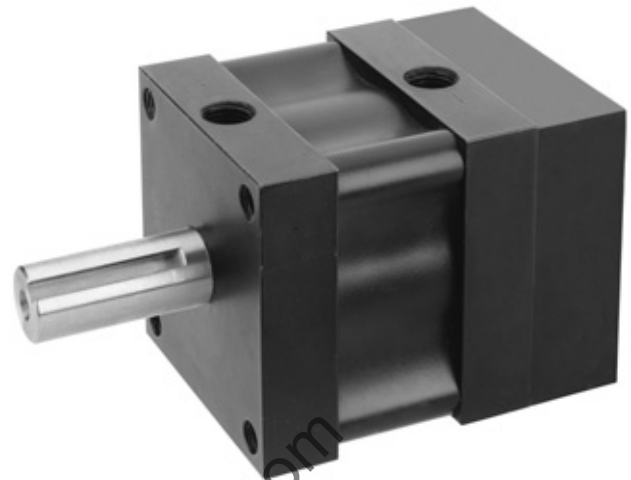


TURN-ACT SERIES ACTUATOR WITH OPTIONAL THRUST PROTECTION AND TEFLON IMPREGNATED ANODIZING

NOTE: The Adjustable Stroke Control (ASC) Option can be integrated into the Thrust Protection Housing to minimize the overall length of the actuator (See pg 21).

Option #	Position
900	Cap End
901	Rod End

Series	Load Limit Without Thrust Protection	Load Limit With Thrust Protection	(A) IN. SQ.	(B) IN.
Comp-act (CA)	10 LBS	250 LBS	1.62	.656
Turn-Act (TA)	25 LBS	500 L	3.03	1.000
Brute (BR)	1000 LBS	CONSULT FACTORY		

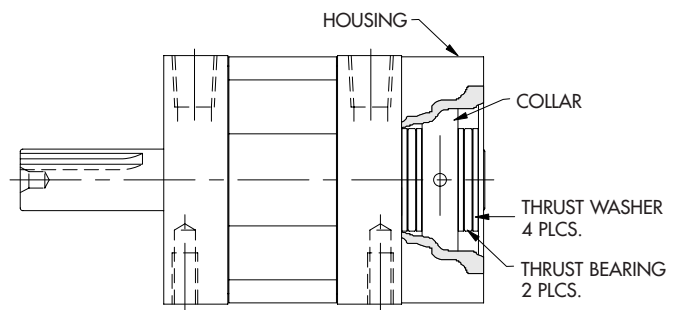

Options- Internal Rotation Stop

Turn-Act rotary actuators are available with nominal 45, 90, 110, 180, 270 and 290 degree rotations. Adjustable stroke control frequently fills the requirement for other than nominal rotations. Some applications have the additional requirement of preventing any user adjustability.

To fill these requirements of:

- A specific non-standard rotation
- User non-adjustability

The Internal Rotation Stop option is accomplished through the use of an extrusion that is bonded to the inner diameter of the rotary actuator tube. This extrusion is machined to restrict the rotation of the actuator. This option can be used to enhance the response time of an actuator by consuming the excess volume of the rotary actuator.

NOTE: A rotation tolerance of +4/-0 degrees is standard, closer tolerance is available. Consult Factory.




INTERNAL STOP

Options- Urethane Bumpers

Polyurethane BUMPERS absorb kinetic energy and reduces noise at the end of stroke. Actual rotation and repeatability achieved when bumpers are installed will be dependent on Load... Air Pressure... and Speed of Rotation.

Series	Option #
Comp-Act (CA)	B00
Turn-Act (TA)	B00
Brute (BR)*	B00

NOTE: Only 1 end of rotation can be bumped when the 45-degree rotor is ordered.
* 180° Brute Units (B99)

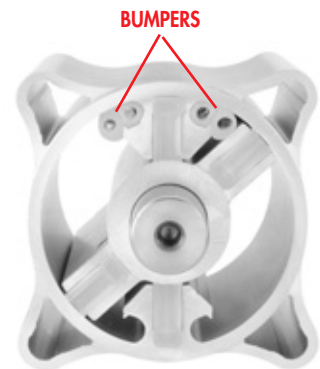

BUMPERS


Options- Motion Control Package

Flow controls are frequently used to affect the speed of rotary and linear actuators. However, in some applications, such as over-center rotary loads, flow controls do not adequately check the speed of rotation. In these types of applications the TURN-ACT Motion Control option can provide effective speed control.

The TURN-ACT Motion Control package is available on the Comp-Act, Turn-Act and Brute Series of rotary vane actuators.

The system consists of 2 linked yet independent rotary actuators, which share a common shaft. (See photo.) The "Rod End" actuator moves the load. The "Control" actuator is oil filled and controls the speed of actuation. A needle valve meters the flow of the fluid through the control actuator. This option provides a uniform, controlled speed of the actuator throughout its rotation.

This integral Motion Control Package provides a smooth controlled actuation while eliminating the need for external Air/Oil systems.

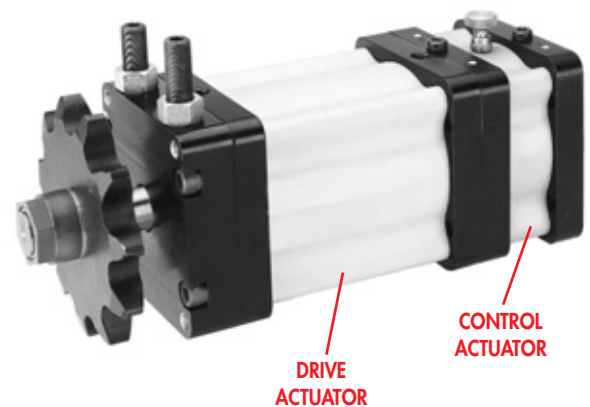

BRUTE SERIES ACTUATOR WITH OPTIONAL ADJUSTABLE STROKE CONTROL AND MOTION CONTROL.

Consult factory for application information.

Options- Cap Switch Systems


Turn-Act Rotary Vane Actuators are available with electronic position sensing switches. The switches have LED lamps that light when in sensing position. If adjusted for end of stroke indication, the LED will remain lit as long as the stroke position is maintained. A small shaft mounted magnet in the switch housing operates the switches (See drawings).



SWITCH SYSTEM WITH 8MM QUICK DISCONNECT



SWITCH SYSTEM WITH 9 FT. LEADS

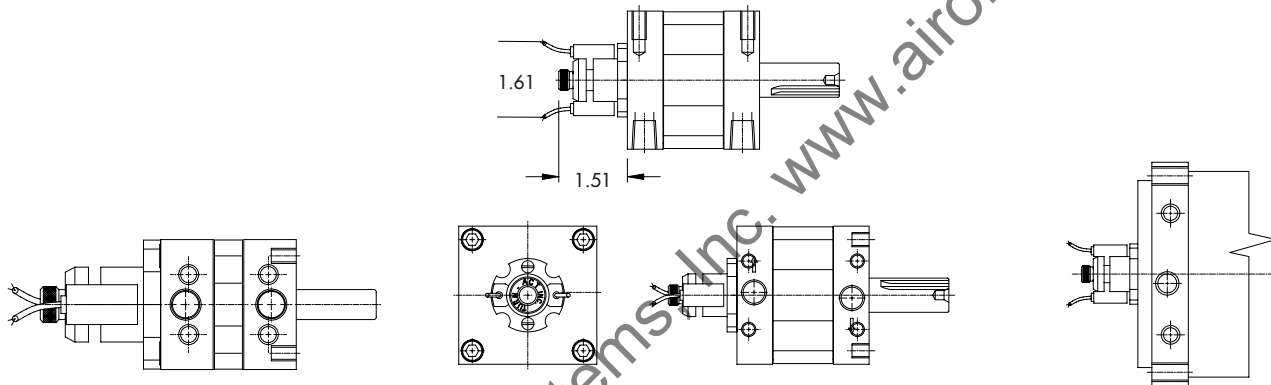

COMPACT (CA) SERIES SWITCHES

TURN-ACT (TA) SERIES SWITCHES


BRUTE (BR) SERIES SWITCHES

SWITCH PACKAGE (CAP END)							
Includes a Cap End Mounted Switch Ready Housing							
Option #*	Switch Type	Function	Lead Type	Switching Voltage	Switching Current	Switching Power	Max. Voltage Drop
A00	Switch Ready No Switches						
A05	PNP/Sourcing	Normally Open Output	22 gauge	6-24 VDC	0.5 Amp Max	N/A	0.5 Volts
A08	NPN/Sinking	Normally Open Output	22 gauge	6-24 VDC	0.5 Amp Max	N/A	0.5 Volts
A02	AC/DC Reed	SPST Normally Open	22 gauge	5-120 VDC/VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts
A25	PNP/Sourcing	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
A28	NPN/Sinking	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
A22	AC/DC Reed	SPST Normally Open	8mm Type - B QD	5-120 VDC/VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts

*Caution: Switches will be permanently damaged if operated without a load. Consult factory if lead length will exceed 20 feet.

Options- Disk Switch Systems


Turn-Act Rotary Vane Actuators are available with the DISK Switch System. It is designed for use with double end actuators or when the available space will not permit the use of other switch options. The Disk Switch System includes a shaft extension to accommodate a shaft-mounted magnet disk. The switches are mounted in dovetail grooves located to sense the disk-mounted magnet (Actuator shown with thrust protection option).

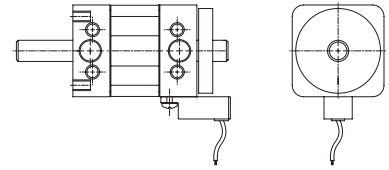


COMP-ACT (CA) DISK SWITCHES



COMP-ACT DISK SWITCH

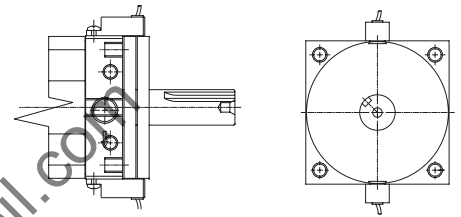

TURN-ACT (TA) DISK SWITCH

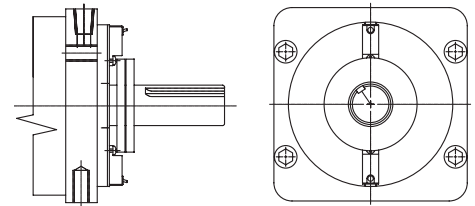

BRUTE (BR) DISK SWITCH

Typical Disk Switch configurations: Consult factory for precise dimensions.

DISK SWITCH (CAP END)							
Includes 2 Each Rear Mounted Magnet Disks and Dove-Tail Grooves on the Cap Ends to Accept Switches							
Option #*	Switch Type	Function	Lead Type	Switching Voltage	Switching Current	Switching Power	Max. Voltage Drop
Consult Factory	Switch Ready No Switches						
Consult Factory	PNP/Sourcing	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	22 gauge	5-120 VDC.VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts
Consult Factory	PNP/Sourcing	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	8mm Type - B QD	5-120 VDC/VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts

*See Page 27 for wiring diagrams.

Options- Disk Switch Systems

DISK SWITCHES (1 SWITCH EACH END)							
Includes 1 Each <u>Front</u> and 1 Each <u>Rear</u> Mounted Magnet Disks and Dove-Tail Grooves on the Rod and Cap Ends to Accept Switches							
Option #*	Switch Type	Function	Lead Type	Switching Voltage	Switching Current	Switching Power	Max. Voltage Drop
Consult Factory	Switch Ready No Switches						
Consult Factory	PNP/Sourcing	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	22 gauge	5-120 VDC/VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts
Consult Factory	PNP/Sourcing	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	8mm Type - B QD	5-120 VDC/VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts

*See Page 27 for wiring diagrams.


DISK SWITCH (ROD END)							
Includes 2 Each <u>Rod End</u> Mounted Magnet Disks and Dove-Tail Grooves on the Rod End to Accept Switches							
Option #*	Switch Type	Function	Lead Type	Switching Voltage	Switching Current	Switching Power	Max. Voltage Drop
Consult Factory	Switch Ready No Switches						
Consult Factory	PNP/Sourcing	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	22 gauge	6-24 VDC Max	0.5 Amp	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	22 gauge	5-120 VDC.VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts
Consult Factory	PNP/Sourcing	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	NPN/Sinking	Normally Open Output	8mm Type - B QD	6-24VDC	0.5 Amp Max	N/A	0.5 Volts
Consult Factory	AC/DC Reed	SPST Normally Open	8mm Type - B QD	5-120 VDC.VAC 50/60 Hz	0.5 Amp Max 0.005 Amp min.	10 watts Max	3.5 Volts

*See Page 27 for wiring diagrams.

Options- Switches: Wiring Diagrams

WIRE LEADS


NPN/PNP Switch with LED

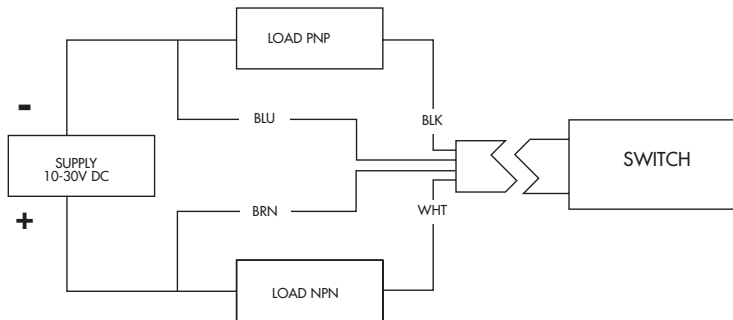

LEAD LENGTHS

Wire Leads – 9'
Quick Disconnect: Pigtail – 6"
Cordset – 15'

AC/DC Reed Switch MOV* with LED

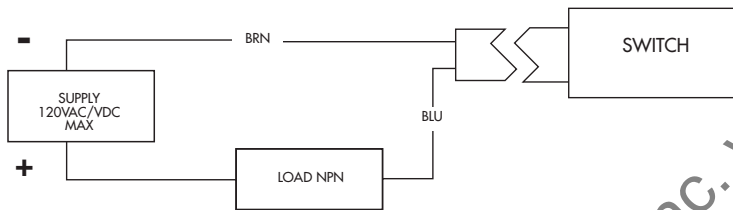



*NOTE: Power supply polarity need not be observed in AC applications.

CAUTION: TO AVOID PERMANENT DAMAGE TO SWITCHES



- 1 Do not exceed rated voltage
- 2 Observe power supply polarity
- 3 Do not operate without a load
- 4 Do not short circuit the load
- 5 Consult factory if lead length will exceed 20 ft.

QUICK DISCONNECT TYPE – B



PNP Sourcing Switch with LED and Type - B Quick Disconnect



NPN Sinking Switch with LED and Type - B Quick Disconnect



AC/DC Reed Switch MOV* with LED and Type - B Quick Disconnect



*NOTE: Power supply polarity need not be observed in AC applications.

Metal oxide varistor surge suppression.

ROTATIONAL LIMITS

Any rotational limits (including Adjustable Stroke Control settings) must be made prior to adjusting switches. Changes in rotation will require the switches to be re-adjusted.

ALLEN-BRADLEY PLC's

With I/O module #1791 require reed switches with internal current limiting protection. This feature is now standard.

Options- Electrical Position Indication (EPI)

The EPI switch system consists of a steel cam that rotates with the actuator vane. This assembly is enclosed in a housing. The housing is tapped to accept a threaded body switch (GO® Switches). When threaded into the EPI housing, the switch senses the cam as it approaches the end of stroke.




TURN-ACT FULL STAINLESS STEEL BODY ACTUATOR AND OPTION 500

How to Order Electrical Position Indication (EPI)	
(EPI) Option #	Description: Includes housing, ferrous cam with or without switches as specified below.
500	EPI Cap End, Position 5 – 2 D279 switches included
501	EPI Rod End, Position 1 – 2 D279 switches included
520	EPI Cap End, Position 5 – without switches
521	EPI Cap End, Position 1 – without switches

The maximum adjusting range is limited to 15° each end of rotation.

POSITION REFERENCE DRAWING



NOTE: Specify the position to be tapped for adjustment screws.
Example: Option 500 would call out position 5 as the prox. switch location, as depicted in the photo above.

Part #	Switch Type/Manufacturer	Operation	Contacts	Housing
D279	GO/Topworx®	SPDT Magnetic Proximity	240VAC 2 Amp 24VDC 50ma	303/304 Stainless Steel Threads 5/8" -18 Environmentally Sealed


NOTE: The same system can be adapted for other brands of threaded body switches. The (EPI) Electrical Position Indication is available by option number only on the Turn-Act and Brute Series, for the Comp-Act Series see the Prox Switch Ready option (pg 29).

GO® Switches reg. General Equipment Co.

Consult factory for application information.

Options- Proximity Switch Ready (PSR)

This option is similar to the EPI/Electrical Position Indicator. (See photo pg. 28.) The "Prox Switch Ready" System consists of a shaft mounted ferrous target cam, enclosed in a housing that is tapped to accept your choice of threaded body switch. Comp-Act, Turn-Act, and Brute Actuators are available as "Prox Switch Ready". (Does Not Include Switches.)

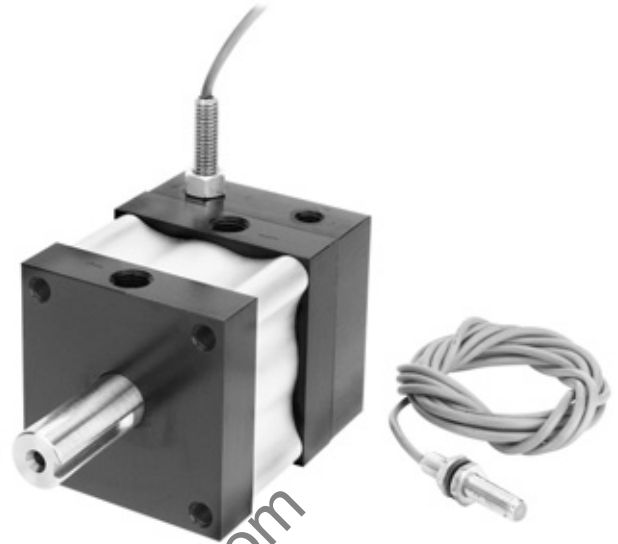


TURN-ACT ACTUATOR WITH PROXIMITY SWITCH READY OPTION

Option #		Description
530	8mm	PSR Cap End, Position 5
540	4mm	PSR Cap End, Position 5
570**	12mm	PSR Cap End, Position 5
571**	12mm	PSR Rod End, Position 1
590*	18mm	PSR Cap End, Position 5
591*	18mm	PSR Rod End, Position 1
420	5/16-24	PSR Cap End, Position 5
421	5/16-24	PSR Rod End, Position 1
430**	3/8-24	PSR Cap End, Position 5
431**	3/8-24	PSR Rod End, Position 1
440*	1/2-20	PSR Cap End, Position 5
441*	1/2-20	PSR Rod End, Position 1

* Brute (BR) series only. Consult factory for Comp-Act and Turn-Act.

** Not available on Comp-Act (CA).

Note: Extreme care needs to be taken when adjusting the switch to insure that the cam does not contact the switch body during actuation. Catastrophic switch failure may occur if the cam contacts the switch body. Do Not Use as an Adjustable Stroke Control. The Adjustable Stroke Control Option (ASC) should be ordered additionally, if the rotation required is outside the standard range and tolerance $\pm 4/-0$ degrees. (See page 21.) Consult factory for required minimum probe lengths.




POSITION REFERENCE DRAWING

NOTE: Specify the position to be tapped for prox. switches. Example: Option 530 would call out position 5 as the prox. switch location, as depicted in the drawing above.

Potentiometers and Encoders

Provides continuous Position sensing loop control systems. (See Drawings.)

Customer selected Potentiometers and Encoders can be mounted/adapted to any of Turn-Act's Rotary Vane Actuators for use in closed loop control systems. (See drawings.)

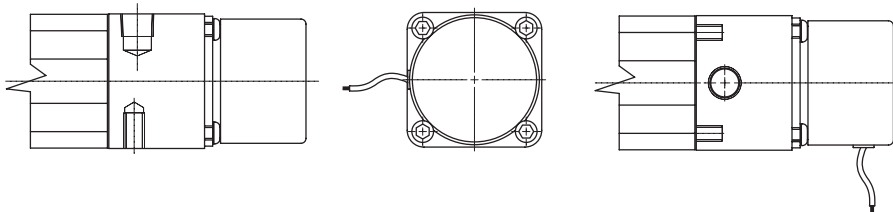

TYPICAL METHOD OF OPERATION ENCLOSED ENCODER MOUNTED TO A TURN-ACT VANE ACTUATOR

Consult factory for application information.



TURN-ACT ACTUATOR WITH ENCODER

Options- Port Locations/Port Types

Below is a partial listing of the inlet/port modifications available.

- Standard port location – Available Port Types and Locations.
- Combination Rod Head and Flange with optional port location
- Double Ports – order to increase actuator response time.
- End Ports – permits access to both ports on the cap head end.

Contact the factory for other options.

STANDARD PORT SIZES

Comp-Act Series	Turn-Act Series	Brute Series
1/8 NPT	1/4 NPT	3/8 NPT

AVAILABLE PORT SIZES

Comp-Act Series	Turn-Act Series	Brute Series
	Option# G10	
10-32	1/8 NPT	1/4 NPT



TURN-ACT ACTUATOR AND OPTIONAL END PORTS


Options- Namur Mount

The Namur Mount is a standard connection pattern for mounting a control valve directly to an actuator. This is a working standard for the process control industry. It permits interchangeability between control valve manufacturers.

The pattern consists of:

- 2 drilled orifices to correspond to the valve ports.
- 4 Mounting/Locating holes, which will allow variable valve orientation.

NOTE: Turn-Act does not supply the control valve.

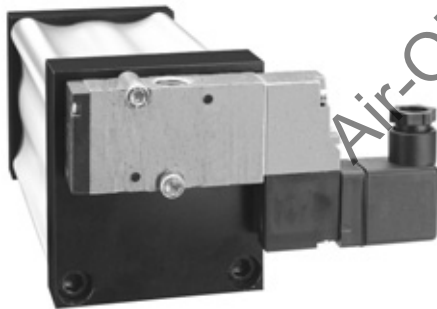


TURN-ACT ACTUATOR WITH (OPTION EN1) NAMUR MOUNTED CONTROL VALVE



TURN-ACT ACTUATOR AND OPTIONAL NAMUR MOUNT (OPTION EN1)

Turn-Act Model	X	Y
11X	2.38	3.34
12X	4.04	4.99
13X	7.07	8.02
14X	10.02	10.98

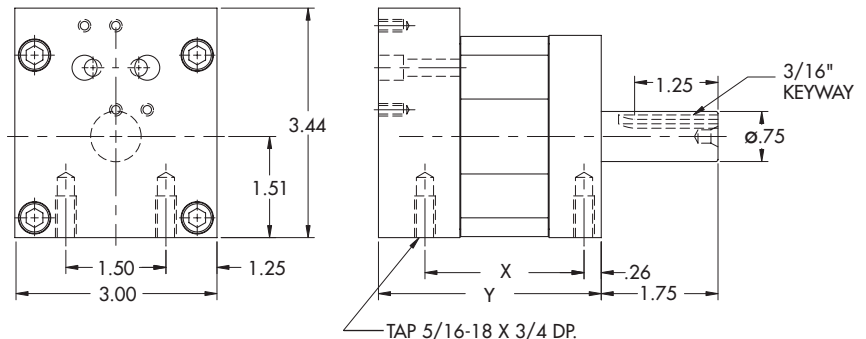

NAMUR REAR MOUNT DRAWING

Consult factory based on various manufacturing of namur products.

Options- Gerotor Hydraulic Power Unit

Turn-Act Actuators with Quietmite Gerotor Hydraulic Power Unit

No compressor available and your application requires an actuator... The answer is the Turn-Act/Quietmite Bi-Directional Power Unit. Turn-Act combines a rotary vane actuator with a compact lightweight self-contained gerotor type hydraulic power unit.

The system is comprised of an electric motor, pump, reservoir and internal relief valve. The power element is a precision gerotor. Change of rotation is accomplished by reversing the motor direction, eliminating the need for a directional valve.


The TURN-ACT/Quietmite's compact size and design provides:

- Dependable operation where compressed air is not available
- Increase torque through operating pressures to 200 psi
- Variable flow rates
- Broad environmental operating ranges.
- Installation flexibility
- Perfect for space starved mobile applications
- Compact Size
- Quite operation


Consult the TURN-ACT sales department with your application requirements.




BRUTE ACTUATOR WITH HYDRAULIC POWER UNIT

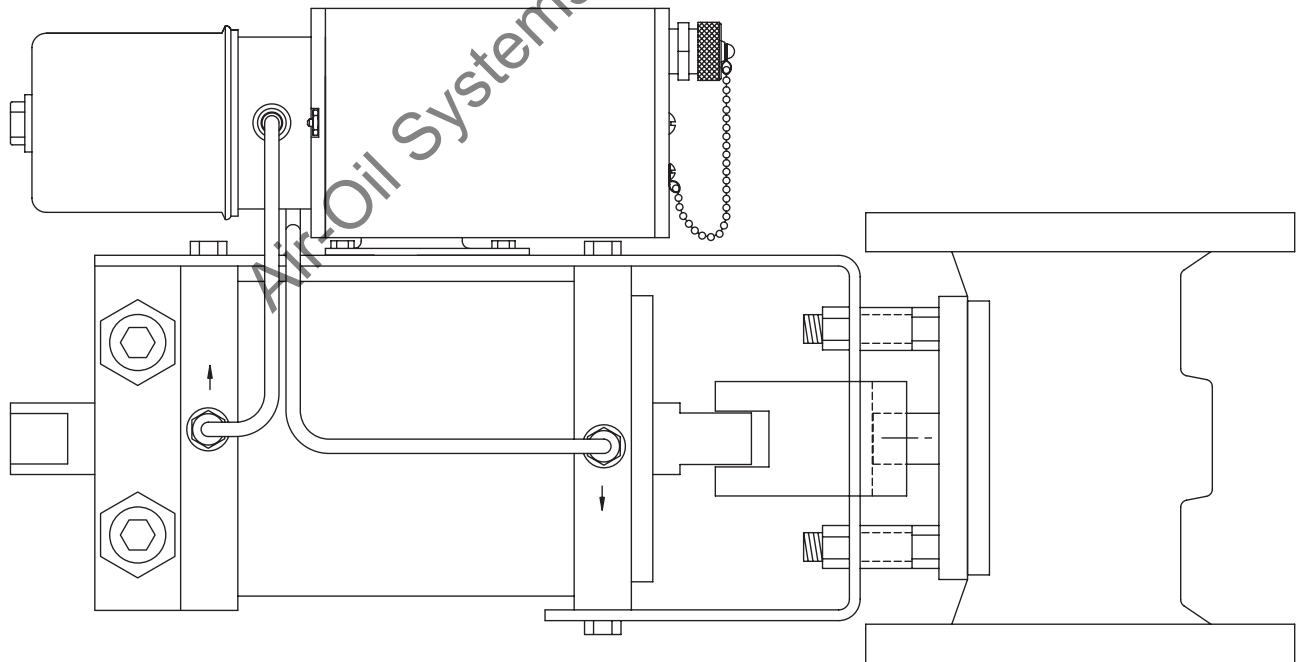

BRUTE SERIES ACTUATOR WITH HYDRAULIC POWER UNIT TO OPERATE AN 8-INCH BALL VALVE




SINGLE KEYWAY




NEED a **MODIFIED**

SHORTER...




SINGLE END SHORT SHAFT

LONGER...




TURNED DOWN


TURNED DOWN...



GUN DRILL




GUN DRILLED...



CROSS DRILL HOLE

CROSS DRILLED...



SINGLE END LONG SHAFT

Air-Oil Systems, Inc. www.airoil.com

SHAFT...

ANSWER ENGINEERING -

The willingness and ability to modify Turn-Act rotary and linear product to fit a specific application.

RAPID CUSTOM MODIFICATION.

Most of our sales are special orders, so we're prepared to be flexible, responsive and accurate. Modifications can be as simple as a shaft extension or an entirely new product. Most often these modifications go from concept to shipped product faster than the competition ships a standard. Our commitment to Answer Engineering is just a phone call away.

RESPONSIVE to your challenge.



Responsiveness is what Answer Engineering is all about. It's why 60% of our business is custom. You bring us a challenge, and through technical innovation we'll find an answer. Simply put, if you can imagine it, we can make it happen.

CHALLENGE US.



We're confident we can respond to your application needs.

ETC... ETC... ETC...



NOT A PROBLEM. IT'S WHAT WE CALL ANSWER ENGINEERING.





END OF SHAFT TAP





NO KEYWAY



DOUBLE KEYWAY



SET SCREW FLAT

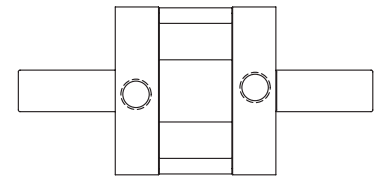

DOUBLE END


Options- Shaft Accessories- Trantorque®

Trantorque

Trantorque keyless shaft couplings eliminates:



- The need for keys, keyways and setscrews.
- Simplifies synchronization.
- Allows for infinite radial adjustments.
- Mounts hubless devices.

The Trantorque coupling uses 2 opposing tapers that expand into the OD and contract on the ID to attach and hold shaft loads.


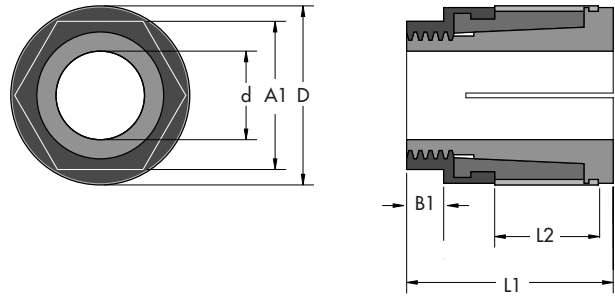


NON-TRAVERSING

Style	Trantorque Series		Part #	Actuator Shaft Diameter (d)	Component Bore (D)	Max. Transmissible		Dimensions					
						Tq.	Thrust	L1	L2	A1	A2	B1	B2
Non-Traversing	Imperial Mini	Comp-Act Series 1-1/4" Bore OEM	6980109	3/8"	3/4"	175 in. lbs.	648 lbs.	1-3/16"	7/16"	5/8"	NA	1/8"	N/A
	Imperial Series	1-1/4" Bore Turn-Dex	6980120	5/8"	1-1/2"	1225 in. lbs.	2310 lbs.	1-21/32"	11/16"	1-1/4"	1-1/2"	5/16"	5/16"
		Turn-Act Series 2-1/2" Bore OEM	6980160	3/4"	1-1/2"	1750 in. lbs.	3080 lbs.	1-21/32"	11/16"	1-1/4"	1-1/2"	5/16"	5/16"
		2-1/2" Bore Turn-Dex	6980240	1"	1-3/4"	2450 in. lbs.	4820 lbs.	2-1/32"	13/16"	1-1/2"	1-3/4"	7/16"	3/8"
		Brute Series	6980320	1-1/4"	2"	4200 in. lbs.	5950 lbs.	2-13/32"	15/16"	1-3/4"	2"	1/2"	9/16"




MINI SERIES



GT SERIES

Style	Trantorque Series		Standard Part #	Stainless Steel Part #	Actuator Shaft Diameter (d)	Component Bore (D)	Standard Unit Max. Transmissible		Stainless Units Max. Transmissible		Dimensions					
							Tq.	Thrust	Tq.	Thrust	L1	L2	A1	A2	B1	B2
Standard or Stainless	Imperial Mini	Comp-Act Series 1-1/4" Bore OEM	6202109	6990109	3/8"	3/4"	250 in. lbs.	925 lbs.	75 lbs.	280 lbs.	7/8"	7/16"	5/8"	N/A	1/8"	N/A
	Imperial Series	1-1/4" Bore Turn-Dex	6202120	6990112	5/8"	1-1/2"	1750 in. lbs.	3300 lbs.	525 in. lbs.	990 1-1/2"	1-1/2"	3/4"	1-1/4"	1-1/2"	5/16"	5/16"
		Turn-Act Series 2-1/2" Bore OEM	6202160	6990160	3/4"	1-1/2"	2500 in. lbs.	4400 lbs.	750 in. lbs.	1320 lbs.	1-1/2"	3/4"	1-1/4"	1-1/2"	5/16"	5/16"
		2-1/2" Bore Turn-Dex	6202240	6990240	1"	1-3/4"	3500 in. lbs.	6600 lbs.	1050 in. lbs.	1980 lbs.	1-7/8"	7/8"	1-1/2"	1-3/4"	7/16"	3/8"
		Brute Series	6202320	6990320	1-1/4"	2"	6000 in. lbs.	8500 lbs.	1800 in. lbs.	2550 lbs.	2-1/4"	1"	1-3/4"	2"	1/2"	9/16"
Metric	Metric Mini	Comp-Act Series 1-1/4" Bore OEM	620268	Consult Factory	8 mm	19 mm	23 N-m	4.0 Kn	Consult Factory		22 mm	11 mm	16 mm	N/A	3 mm	N/A
	Metric GT Series	Turn-Act Series 2-1/2" Bore OEM	6202770		17 mm	38 mm	220 N-m	17 Kn			38 mm	19 mm	32 mm	38,1 mm	8 mm	8 mm
		Brute Series	6202835		30 mm	51 mm	580 N-m	35.4 Kn			57 mm	25,5 mm	46 mm	50,8 mm	13 mm	14,5 mm

Shaft Accessories-Trantorque (cont.)

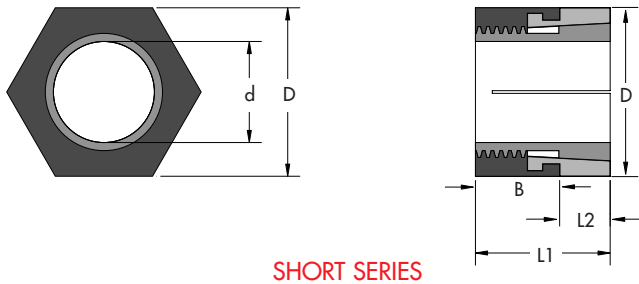


SHORT SERIES

Style	Trantorque Series		Part #	Actuator Shaft Diameter (d)	Component Bore (D)	Max. Transmissible		Dimensions			
						Tq.	Thrust	L1	L2	A	B
Short Series	Imperial Mini	Comp-Act Series 1-1/4" Bore OEM	6940109	3/8"	3/4"	250 in. lbs.	925 lbs.	5/8"	1/4"	3/4"	3/8"
		1-1/4" Bore Turn-Dex	6940120	5/8"	1-1/2"	1750 in. lbs.	3300 lbs.	1-1/4"	1/2"	1-1/2"	3/4"
	Imperial Series	Turn-Act Series 2-1/2" Bore OEM	6940160	3/4"	1-1/2"	2500 in. lbs.	4400 lbs.	1-1/4"	1/2"	1-1/2"	3/4"
		2-1/2" Bore Turn-Dex	6940240	1"	1-3/4"	3500 in. lbs.	6600 lbs.	1-1/4"	1/2"	1-1/4"	3/4"
		Brute Series	6940320	1-1/4"	2"	6000 in. lbs.	8500 lbs.	1-1/4"	1/2"	2"	3/4"

Options- Shaft Accessories- Hub Adapter

This option provides an alternative to the conventional output shaft. The Hub Adapter option allows for easy mounting of grippers, tooling, actuators, cylinders and other end effectors that require a flat mounting surface.

The Hub is manufactured of aluminum with 4 counter bored through holes on one side and threaded holes on other. Trantorque (see Trantorque section) is used in mounting of the Hub Adapter to the actuator shaft. This attachment method provides infinite hub/hole orientation.

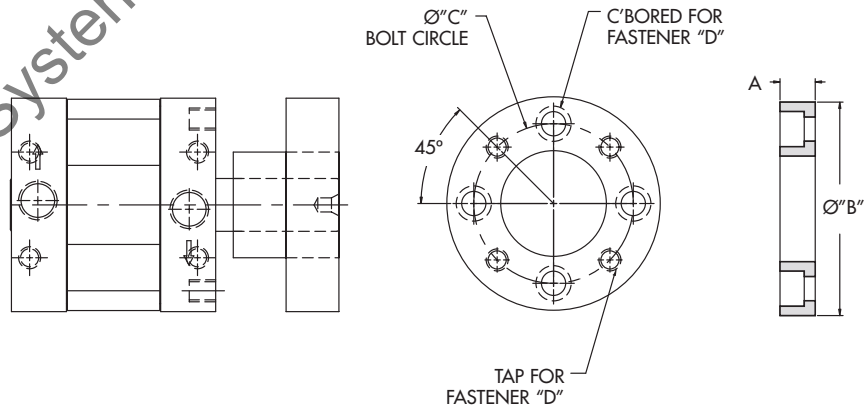

Option #	Description
M10	W/Mild Steel Trantorque
M20	W/Stainless Steel Trantorque

TRANTORQUE WITH ADAPTER HUB


Hub Adapter Dimensions	Comp-Act (CA) Series	Turn-Act (TA) Series	Brute Series
A	0.438"	0.750"	1.000"
B	1.563"	2.500"	5.000"
C	1.156"	2.000"	3.656"
D	#10-24	1/4-20	1/2-13

NOTE: Contact Factory for other hub diameters, bolt hole patterns, etc.



3 Position Actuator Systems

The Turn-Act Three Position Actuator System utilizes a control actuator, output actuator, and a set of stop cams to achieve the desired rotation.


The two actuators (control & output) are mounted on a common plate. The single end control actuator (see drawing) is located at the back of the assembly. The double end output actuator is located at the front of the assembly. Stop cams are mounted on the rear shaft of the output actuator and the front shaft of the control actuator. These cams allow the control actuator to restrict the motion of the output actuator by rotating a stop into an interference mid-stroke position. When the control actuator rotates the stop cam out of the interference position the output actuator is free to rotate to its end of stroke. Adjustable stroke control permits precise mid and end of stroke positioning. Unlike other 3 position systems, the TURN-ACT system has ZERO backlash and is 100% repeatable in all stop positions.



COMP-ACT (CA) 3 POSITION SYSTEM

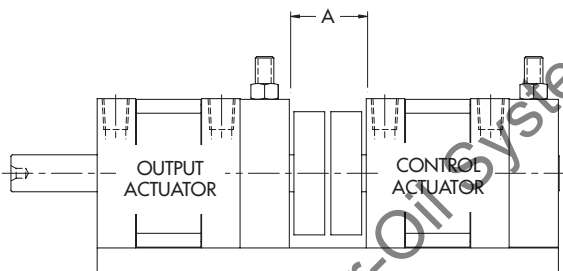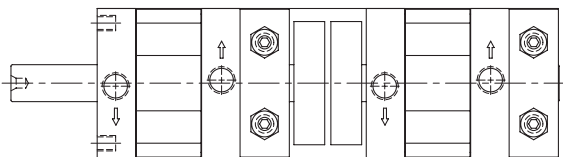

TYPICAL 3 POSITION SYSTEM

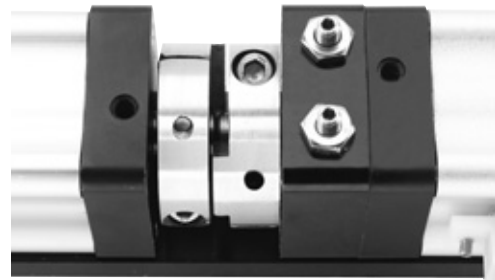


3 POSITION SYSTEM CAMS

Consult factory for application needs.

Model	A	B	C
CA	1.040	2.000	.375
TA	1.562	3.530	.500
BR	5.750	6.750	.750

NOTE: Overall length of the 3 Position System is determined by adding the (A) to the combined length of the actuators selected.

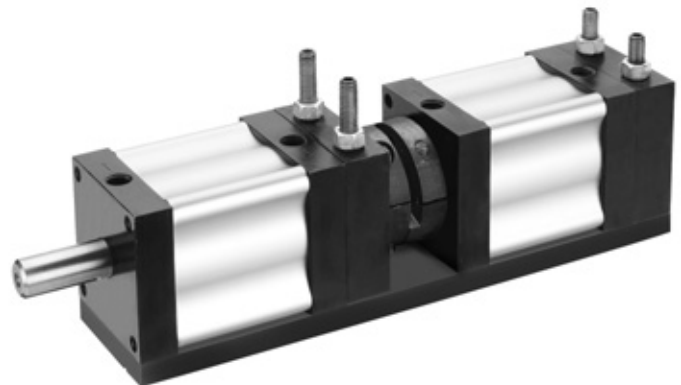

TURN-ACT (TA) 3 POSITION SYSTEM

Hydraulic Service Rotary Actuators

Turn-Act Rotary Actuators can be ordered with modifications for use only in **low-pressure, non-shock** hydraulic applications.



Hydraulic pressure shock is a common phenomenon of hydraulic systems, and is the most common cause of actuator failure. The actuator must be isolated from this shock or damage may occur. Proper hydraulic system design is a requirement for Hydraulic Service Rotary Actuators, and must include pressure-reducing valves for each actuator in use, in addition to normal system pressure relief valves.

Consult factory for the required modifications for hydraulic applications. This option includes:

- Head drain ports
- Modified rotor assembly
- Modified seal configuration
- Heat treated/hardened shaft

Hydraulic Service Rotary Actuators are available in the Comp-Act, Turn-Act and Brute series. The allowable pressures are listed below:

Comp-Act	200 psi for all sizes
Turn-Act	500 psi for size 1 & 2 200 psi for size 3 & 4
Brute	200 psi for all sizes

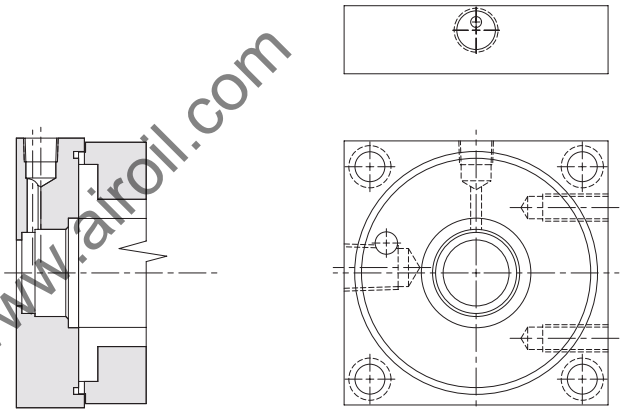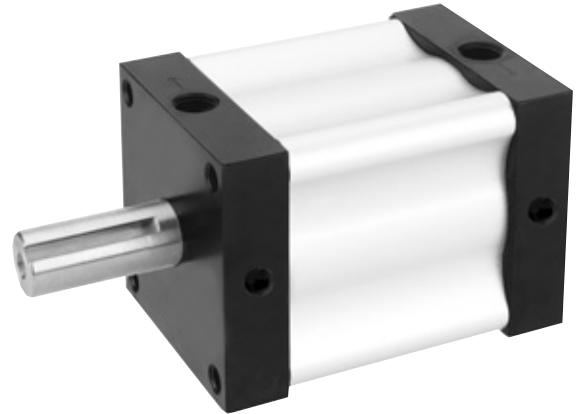

HYDRAULIC DRAIN PORT DETAIL

Actuators for Special Environments

As standard Turn-Act Actuators are designed for most industrial environments. However food service, clean room, (medical and semi conductor) and other environments where the units will be subjected to frequent wash down, often with caustic solutions may require special modification.

Modifications available are:

- Shaft quad seals in lieu of standard "o" rings
- Viton seals
- Stainless steel shaft and fasteners
- Blind cap heads
- Blind and sealed Adjustable Stroke Control


- Exterior coatings:
 - Teflon impregnated hard anodized surface meets FDA & USDA requirements for use in caustic and clean room environments.
 - Epoxy – consult factory for specific coating, cost and delivery
 - Nickel Plated – consult factory for cost and delivery
- Exterior Materials:
 - Full Stainless Steel (303 & 316) Body Actuators. The patented Turn-Act tube is produced in stainless steel to meet specific application requirements.

These modifications can be varied to address the specific needs of the application.

Consult the factory for specific ordering information.



TEFLON IMPREGNATED ANODIZING

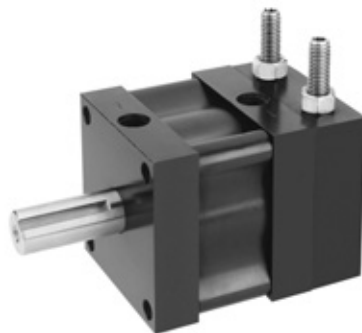

EPOXY COATED



FULL STAINLESS STEEL BODY

Clean-Series Option

Turn-Act Rotary Vane Actuators offer distinct advantages over linear cylinders in clean room applications. Below is a comparison of design and operation issues of both cylinders and vane actuators. Also included is general information regarding how contaminants can be introduced into clean environments.

The Clean-Series option has been developed for use in environments that are contamination sensitive. Contamination can occur through multiple methods:

1. Introduction of contamination via cylinder external leakage.

Linear air cylinders have external sliding parts that may have slight air leakage from the piston rod. During extension and retraction the piston rod can introduce contaminants into the clean room by pulling lubricants out of the cylinder past rod seals and wipers. The lubrication required for these cylinders to perform properly is a primary source of contamination.

2. Contaminant Formation caused by abrasion.

Contaminants can be formed through abrasion of cylinder moving components during operation.

3. Components not properly degreased and packaged after manufacture.

Failure to properly clean and degrease components after assembly and test will introduce contamination. Additionally, packaging with improper materials can further result in introduction of contaminants into the clean environment.

Turn-Act Rotary Vane Actuator WITH the Clean Series Option addresses these contamination issues through:

1. Minimization of potential external leakage.

The design of Turn-Act Rotary Vane Actuators inherently minimizes the potential of external contamination from lubricants.

The shaft/rod of a vane actuator does not retract into, or extend out of the air chamber. In a Rotary Vane Actuator the rod rotates outside of the lubricated air cylinder. This results in a minimization of lubricant related contamination. Additional actuator modification can further reduce the incidence of contamination. A secondary, rod head, vacuum port, positioned between inner and outer rod-packings, permits the use of vacuum to exhaust potential contamination outside of the clean room.

2. Reduce abrasion contaminant formation.

Turn-Act's selection of non-contaminating anodized aluminum surfaces, Delrin® bearings, stainless steel shafting and alternative lubricants reduces the likelihood of contamination formation through the abrasive action during operation of the actuator.

3. Proper Cleaning and degreasing.


Turn-Act thoroughly de-greases and cleans actuators with non-contaminating compounds bagged and sealed for shipment in anti static packaging. This choice of materials for the cylinder surfaces, bearings and shafting further minimizes the introduction of contamination in clean rooms.

The nature of a rotary actuator, permits any tooling to be rotated in front of the work surface as opposed to linear cylinders where the rod is typically directed at the work surface. This design factor further minimizes the potential of external contamination being directed at the clean room work surfaces.

Proper Clean Room Design will contribute to the overall minimization of contamination. When possible, pneumatic components should be mounted below and as far from the work surface as practical.



**EØ1-CLEAN-SERIES ACTUATOR/
COMP-ACT (CA)**

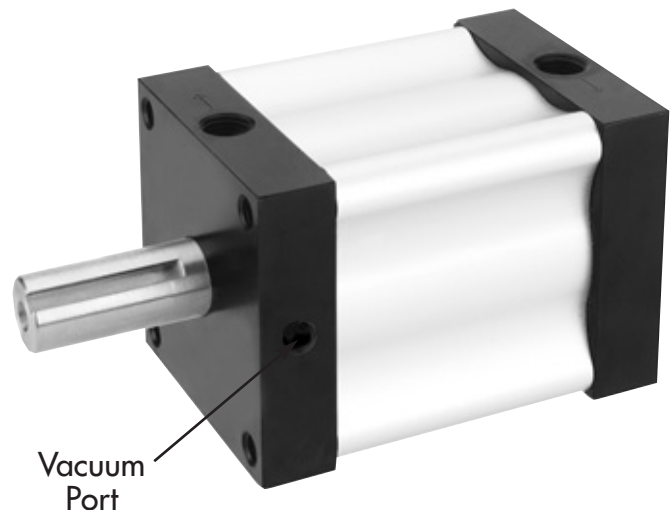

**SPECIAL-CLEAN-SERIES ACTUATOR/
TURN-ACT (TA)**


NOTE: Turn-Act Rotary Vane Actuators are suitable and compatible for most clean-room applications. For "Class I" and "Class X" applications please consult the factory.

Systems


Turn-Act Rotary Vane Actuators can be combined with other Turn-Act products to create multiple axis systems.

- Guided Rod Cylinder
- NFPA Cylinders
- Rotary Actuators
- Multi-Act


LINEAR SYSTEMS:

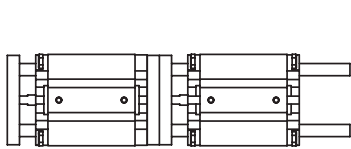


(A) INLINE LINEAR




(B) PERPENDICULAR LINEAR




(C) PERPENDICULAR ROTARY




(D) INLINE ROTARY



(E) WITH BRIDGEPLATE MOUNTED LINEAR




(F) WITH BRIDGEPLATE MOUNTED ROTARY




(G) WITH BRIDGEPLATE MOUNTED ROTARY


ROTARY SYSTEMS:



(H) PERPENDICULAR ROTARY




(I) PERPENDICULAR LINEAR




(J) INLINE LINEAR



(K) INLINE ROTARY



(L) WITH BRIDGEPLATE MOUNTED LINEAR



(M) WITH BRIDGEPLATE MOUNTED LINEAR

Consult factory for application information.

Micro-Vane Series

ROTARY VANE ACTUATORS:

- Torque output of 1.4 in. lbs.
- 3 Standard rotations: 90, 180 & 270 degrees.

As compared to other rotary devices... Turn-Act Vane Actuators have:

- One moving part providing:
 - ZERO Backlash/no loss of motion.
 - Precise repeatability.
 - Continuous full torque throughout rotation.
- Patented Urethane seals for:
 - Long cycle life and Non-Lube service.
- Options and modifications to fit your application

Just imagine... How TURN-ACT Answer Engineering can work for you!

Teflon reg. DuPont. Rulon reg. Dixon, Div. of Furon



MICRO-VANE



MICRO-VANE WITH SWITCHES



MICRO-VANE WITH FLANGE

TORQUE CHARTS		
SINGLE VANE (SV) 90°, 180° AND 270° ROTATIONS		
psi	Actuator Model	in. lbs
100	Micro-Vane 10	1.4
80	Micro-Vane 10	1.12
60	Micro-Vane 10	0.84

PORTS		
Ports	90° & 180°	270°
Side Port	#10-32 or M3	M3
End Ports	M3	M3

SPECIFICATIONS

Torque @100 psi....1.4 in. lbs.
 Rotation (+5°)...90° 180° 270°
 Max. Air Pressure100 psi
 Temp. Range40°F to 140°F

Lubrication
 Factory lubricated

Materials
 Housing..Teflon® Impregnated
 Hard Anodized Aluminum
 Shaft & TrimStainless Steel
 Seals.....Urethane
 BearingsRulon®

Filtration
 Air25-50 microns
 Leak rates....4 cfm or less@100 psi

Loads
 Side & Thrust16.0 oz.
 Weight.....0.86 oz.

Special Conditions and Limited Warranty

Determination of the suitability of any information or product for the application contemplated by any user or the manner of that use is the sole responsibility of the user.

Turn-Act, reserves the right to improve or change designs without notice.

All orders are subject to acceptance by the factory sales department.

Turn-Act, agrees to repair or replace to the original purchaser any standard parts or products for a period of 12 months from date of shipment which Turn-Act determines upon inspection to be defective in workmanship or material. Wear components including but not limited to seals and bearings are excluded from this warranty.

Under no circumstance may merchandise be returned without written authorization from the factory.

This warranty is void in the event the product has been tampered with, altered, or serviced by unauthorized personnel.

Turn-Act's, total responsibility for any claims, damages, losses or liabilities related to the product covered hereunder shall not exceed the purchase price of such product. In no event shall Turn-Act be liable for any special, indirect, incidental or consequential damages of any character, including but not limited to loss of use of productive facilities or equipment, lost profit, property damage, transportation, installation or removal or lost production whether suffered by purchaser or third party. Turn-Act disclaims all liability for any and all cost, claims demands, charges, expenses, and other damages, either direct or indirect, incident to all property damage arising out of any cause of action based on strict liability. This warranty gives you specific legal rights and you may have other rights, which vary from state to state.

Answer Engineering
COMPACT[®]
AUTOMATION PRODUCTS LLC
An **IMC** Company

TURN-ACT[®]
An **IMC** Company

Turn-Act
105 Commerce Way
Westminster, SC 29693
USA
Tel: 864.647.9521
Fax: 864.647.9574
www.turn-act.com

Just imagine...
How Turn-Act's
Answer Engineering can work for you!