

cylinders

C Series
Compact Cylinder Line



numatics

Table of Contents

NUMATICS®

C Series	3-30
Features and Benefits	3
How to Order.....	4-5
Basic Compact Series Cylinder.....	6
Round Head and Cap Mount	7
Flange Mounts.....	8
Clevis Mounts	9
Eye Mounts	10
Bottom Mounts	11
Single Acting Cylinders.....	12-13
Double Rod Cylinders	14
Back to Back Cylinders	15
Tandem Cylinders	16-17
Accessories	18-20
Switch Detail	20
World Switches	21-22
Global Switches.....	23-24
How to Order - C Series Piston Rod Assembly	25
How to Order - C Series Repair Kit.....	26
How to Order - C Series Seal Kit	26
Piston Rod Assembly Kit Removal/Installation Instructions	27
Diagrams.....	28
Repair Kit Installation Instructions.....	29
Seal Kit Installation Instructions	29
Seal Installation Guide	30



The **C Series** is a robust compact cylinder line that is designed to fit tight space requirements. The low profile design and variety of mounting options makes this cylinder line extremely popular. Furthermore, its unique style and diversity makes the C Series a one of a kind compact cylinder line.

Tube

The **tube** is hard coat anodized aluminum. The hard coating is an electro-chemical process, which produces a very dense surface of aluminum oxide. This surface has extreme hardness (60 RC.), excellent wear and corrosion resistance, and a low coefficient of friction. Additionally, profile tubing is standard on 3/4" through 2-1/2" bore sizes (3" and 4" bores are the tie rod configuration). The profile tubing has a custom dovetail groove on all sides for trouble-free switch and accessory mounting.

End Caps

The **end caps** are accurately machined from solid aluminum bar stock. They are anodized for corrosion resistance. Additionally, a recess on the piston-mating surface (at both ends) enables the air to work on a larger piston area for effortless breakaway.

Rod Bushing

The C Series includes a sintered bronze **rod bushing** for maximum load bearing support.

Rod Seal

The quad ring **rod seal** ensures proper sealing even at low pressures.

Piston Rod

High strength steel (100,000 psi minimum yield) **piston rod** has a ground, polished, and chrome plated surface. This surface provides maximum life for both the rod bushing and the seals.

Piston Seal

The quad ring **piston seal** ensures proper sealing even at low pressures.

Piston

The solid aluminum alloy **piston** is strong and durable.

Tie Rods

The **tie rods** (3" and 4" only) are 100,000 psi minimum yield steel for maximum holding power. The threads are roll formed for superior strength and engagement.

Tube End Seal

The **tube end seals** are compression type and reusable.

Ports

Our enhanced **port** design enables the cylinder to work more efficiently. Through the use of precise machining depths and tool shape, we are able to smooth the flow path into and out of the cylinder.

Mounting Holes

The dual purpose **mounting holes** allow use of through bolts or threaded-in attachments.



Standard Specifications:

- Variety of mounts
- Bore sizes from 3/4" through 4"
- Piston rod diameters from 1/4" to 1"
- Nominal pressure rating is 250 psi air
- Standard temperature -10°F to 165°F (-23°C to 74°C)
- All aluminum construction
- NPTF ports
- Flexible port locating



C Series Rugged Compact

How to Order

Leave blank unless using MU or BK option.

P1 C L - 04 A 1 B - A AA 0 04 A

Mount

- F1 = Front Flange
- F2 = Rear Flange
- P1 = Fixed Clevis
- P2 = Detachable Clevis
- P3 = Fixed Eye
- P4 = Detachable Eye
- R3 = Round Head and Cap
- S2 = Foot Mount
- S4 = Bottom Tapped
- X0* = Basic-No Mount

*S4 mount is standard on 3/4" and 1 1/8" bore.

Type

- C = Compact Cylinder Line

Bore

- C = 3/4"
- G = 1-1/8"
- K = 1-1/2"
- L = 2"
- M = 2-1/2"
- N = 3"
- R = 4"

Full Inches Of Stroke

- 00 = 0" Stroke
- 01 = 1" Stroke
- 02 = 2" Stroke
- 03 = 3" Stroke
- 20 = 20" Stroke

Fractional Inches Of Stroke

- | | |
|-----------|------------|
| A = 0" | I = 1/2" |
| B = 1/16" | J = 9/16" |
| C = 1/8" | K = 5/8" |
| D = 3/16" | L = 11/16" |
| E = 1/4" | M = 3/4" |
| F = 5/16" | N = 13/16" |
| G = 3/8" | O = 7/8" |
| H = 7/16" | P = 15/16" |

Rod End Code

- 1* = #1 Standard Rod Diameter
- 2 = #2 Standard Rod Diameter
- 3 = #3 Standard Rod Diameter
- 4 = Special Standard Rod Diameter (must specify threads)
- 5 = Special Oversize Rod Diameter (must specify threads)
- 6 = #1 Oversized Rod Diameter
- 7 = #2 Oversized Rod Diameter
- 8 = #3 Oversized Rod Diameter

Fractional Inches of Stroke

- | | |
|-----------|------------|
| A = 0" | I = 1/2" |
| B = 1/16" | J = 9/16" |
| C = 1/8" | K = 5/8" |
| D = 3/16" | L = 11/16" |
| E = 1/4" | M = 3/4" |
| F = 5/16" | N = 13/16" |
| G = 3/8" | O = 7/8" |
| H = 7/16" | P = 15/16" |

Full Inches of Stroke

- 00 = 0" Stroke
- 01 = 1" Stroke
- 02 = 2" Stroke
- 03 = 3" Stroke

Magnet Piston

- 0 = No Magnet
- 2* = Reed Magnet & Wear Band
- 4* = Electronic Switch Magnet (Order switches separately)

*Adds to OAL of cylinder, see page 5 for details.

Options

- AA = No Options
- BA = Bumpers, Both Ends
- KA = Stroke Adjuster (Specify Length)
- DA = Double Rod End
- NA = Nickel Plated
- SA = Stainless Steel Rod
- SE** = Spring Extend
- SR** = Spring Retract
- SS = Stainless Steel Rod and Tie Rods (3 and 4 Bores)
- ST = Stainless Steel Tie Rods (3 and 4 Bores)

- VA = Viton Seals
- 1A = Rod Extension (specify length)
- 2A = Thread Extension (specify length)
- WA* = Wear Band
- MU = Multiposition Cylinder
- BK = Back to Back Cylinder
- TD = Tandem Cylinder

* Adds to OAL of cylinder, see page 5 fore details.
** 2" Stroke Maximum

Cushions

- A = No Cushions


Ports

Position#	10-32	*1/8"	1/4"
1	A	B	C
2	G	H	I
3	M	N	O
4	S	T	U

* See page 5, notes on ordering for more information.

NOTE: 1/8" and 1/4" ports can affect OAL of cylinder. See page 5 for details.

Cylinder Orientation



Ports Normally in Position 1

Rod End Styles, Diameters and Threads


BORE	DIAMETER	STYLE #1 STANDARD MALE	STYLE #2 OPTIONAL FEMALE	STYLE #3 STANDARD FEMALE
3/4"	.250	#8-32	N/A	#8-32
1 1/8"	.500	1/4-28	5/16-24	1/4-28
1 1/2"	.625 .750	7/16-20 1/2-20	3/8-24 N/A	7/16-20 1/2-20
2"	.625 .750	7/16-20 1/2-20	N/A N/A	7/16-20 1/2-20
2 1/2"	.625 .750	7/16-20 1/2-20	N/A N/A	7/16-20 1/2-20
3"	1.000	3/4-16	5/8-18	3/4-16
4"	1.000	3/4-16	N/A	3/4-16

*NOTE: Style #1 Male rods are studded female rods



How to Order continued

Figure 1.
Wear Band Option



Side load and misalignment are major factors that can cause premature failure of the rod bushing and piston, the two load bearing points on a cylinder.

The Wear Band option separates the load bearing points by locating the wear band at the rear of the piston assembly, to give maximum column strength even at full extension (Fig. 1).

The wear band is a stable, lubricating strip placed far back on the piston. Its width and placement serve to locate piston load at the optimum point.

Order as "WA" Option or by putting a "2" in the magnetic piston code

Minimum Length detail for Switches

BORE	MIN. STROKE "SENSE ONE END"	MIN. STROKE "SENSE BOTH ENDS"
3/4"	1/2"	1/2"
1-1/8"	1/2"	1/2"
1-1/2"	7/16"	7/16"
2"	7/16"	7/16"
2-1/2"	1/4"	3/8"
3"	1/4"	3/8"
4"	1/8"	5/16"

C series Length Adders

Standard Adders

Cylinders	Bore	WA Option	"4" Magnet Code	"2" Magnet Code	"BA" Option Bumpers (Both Ends)	1/8" NPT Ports
C-series	0.75"	*1.05"	0.300"	*1.05"	0.125"	0.438"
C-series	1.125"	*0.925"	0.300"	*0.925"	0.125"	0.438"
C-series	1.5"	*0.937"	0.313"	*0.937"	0.125"	N/A
C-series	2"	*0.937"	0.313"	*0.937"	0.125"	N/A
C-series	2.5"	*1"	0.375"	*1"	0.125"	N/A
C-series	3"	*0.750"	0.500"	*0.750"	0.125"	N/A
C-series	4"	*0.875"	0.500"	*0.875"	0.125"	N/A

Combo Adders

WA(wearband)+ 2(Reed Magnet)	WA(wearband)+ 4(Electronic Magnet)
*1.05"	**1.05"
*0.925"	**0.925"
*0.937"	**0.937"
*0.937"	**0.937"
*1"	**1"
*0.750"	**0.750"
*0.875"	**0.875"

Special Notes:

* For cylinders that require a "2" (reed) magnet, a special piston will be used. This piston will incorporate the wearband, so when the "2" style magnet is ordered the cylinder will automatically have a wearband. For cylinders that require a "WA" option (wearband) this same special piston is used, but the magnet will not be placed into the groove unless ordered, therefore the adders will be equal for the "2" magnet and "WA" option. When ordering the combination of "2" (reed) magnet and "WA" (wearband) option you will only use the adder once.

** For cylinders that require the combination of a "4" style (Electronic) hall magnet plus a "WA" (Wearband) a special piston will be used. See table for combination length adders.

Notes on Ordering:

Ports - Full flow 10-32 ports are standard on 3/4" and 1 1/8" bore Compact Series. If you want 1/8" NPTF ports, overall lengths will increase by 7/16" on double rods and 1/2" on single rods due to a thicker head and cap. Full flow 1/8" NPTF ports are standard and 1/4" NPTF ports are not available on 1 1/2" and 2" bore sizes. Full flow 1/4" NPTF ports are standard on 2 1/2" through 4" bore sizes. Smaller ports are available.

Specials - Various special configurations are available: consult factory. Metric rod threads and "G" ports are available by special order.

Multiple Options - For multiple options, please consult the factory for "combination" option codes.




C Series Rugged Compact

NUMATICS®


Basic Compact Series Cylinders

3/4" and 1 1/8" Bores

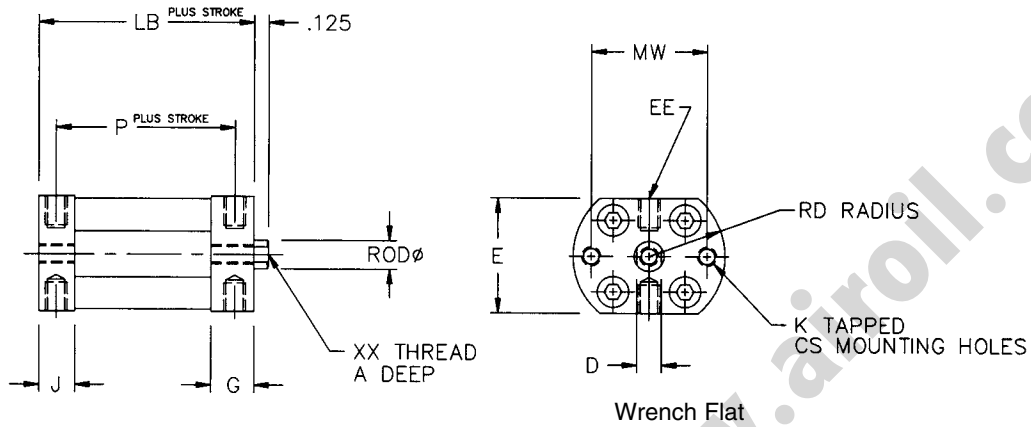

Mount Code S4 (Standard)

1 1/2" Through 4" Bores

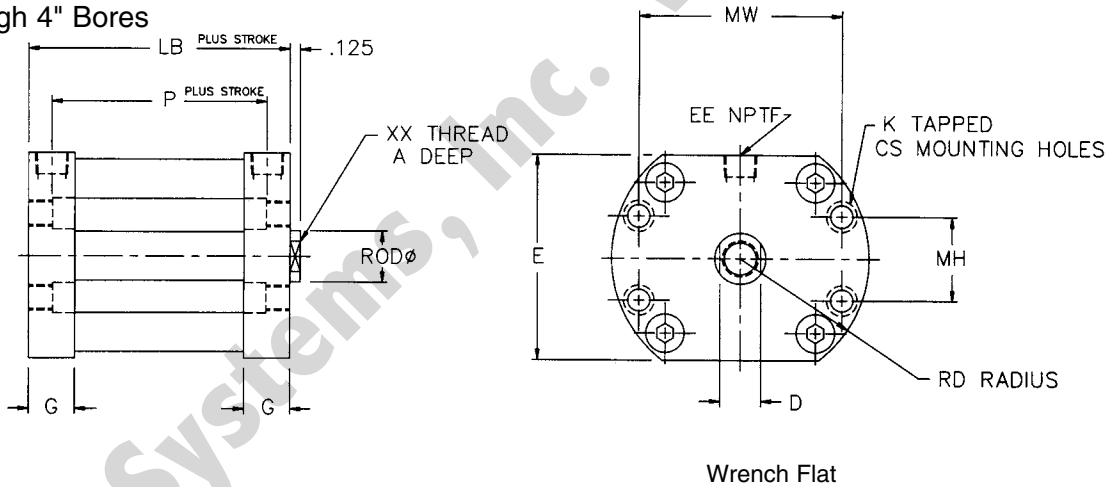



Mount Code XO

Basic Cylinder Dimensions

BORE	ROD	A	CS	D	E	EE+	G	J	K	LB	MH	MW	P	RD	XX
3/4"	0.250	0.375	#5	0.212	1.250	#10-32	0.406	0.343	#8-32	0.950	N/A	1.375	0.638	0.844	#8-32
1-1/8"	0.500	0.375	#6	0.375	1.750	#10-32	0.406	0.343	#10-32	0.950	N/A	1.793	0.638	1.125	1/4-28
1-1/2"	0.625	0.500	#10	0.500	2.000	1/8	0.625	N/A	1/4-28	1.438	.770	2.114	0.875	1.313	7/16-20
1-1/2"	0.750	0.750	#10	0.625	2.000	1/8	0.625	N/A	1/4-28	1.438	.770	2.114	0.875	1.313	1/2-20
2"	0.625	0.500	1/4	0.500	2.500	1/8	0.625	N/A	5/16-24	1.438	1.029	2.483	0.875	1.575	7/16-20
2"	0.750	0.750	1/4	0.625	2.500	1/8	0.625	N/A	5/16-24	1.438	1.029	2.483	0.875	1.575	1/2-20
2-1/2"	0.625	0.500	1/4	0.500	3.000	1/4	0.750	N/A	5/16-24	1.750	1.363	2.922	1.063	1.875	7/16-20
2-1/2"	0.750	0.750	1/4	0.625	3.000	1/4	0.750	N/A	5/16-24	1.750	1.363	2.922	1.063	1.875	1/2-20
3"	1.000	0.875	1/4	0.875	3.500	1/4	0.750	N/A	5/16-24	1.875	1.585	3.399	1.188	2.125	3/4-16
4"	1.000	0.875	5/16	0.875	4.500	1/4	0.750	N/A	3/8-24	1.875	2.060	4.418	1.188	2.750	3/4-16



Round Head and Cap Mount

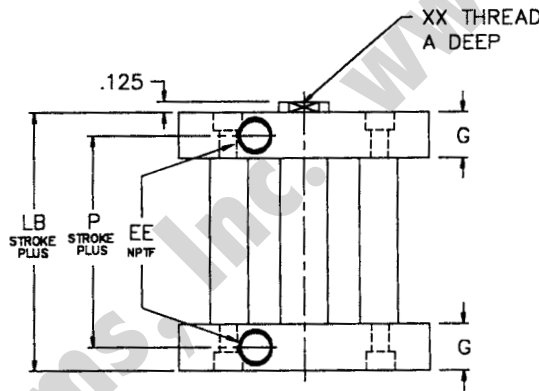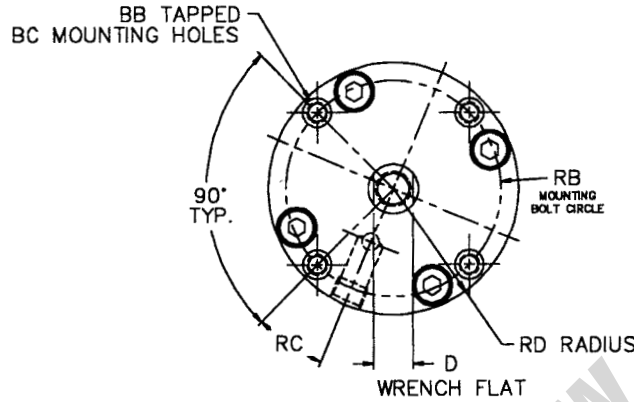

Mount Code R3

Basic Cylinder Dimensions

BORE	ROD	A	BB	BC	D	EE+	G	LB	P	RB	RC	RD	XX
3/4"	0.250	0.375	#10-32	#6	0.212	#10-32	0.406	1.013	0.638	1.219	35°	0.750	#8-32
1-1/8"	0.500	0.375	#10-32	#6	0.375	#10-32	0.406	1.013	0.638	1.688	20°	1.000	1/4-28
1-1/2"	0.625	0.500	1/4-28	#10	0.500	1/8	0.625	1.438	0.875	2.188	21°	1.313	7/16-20
1-1/2"	0.750	0.750	1/4-28	#10	0.625	1/8	0.625	1.438	0.875	2.188	21°	1.313	1/2-20
2"	0.625	0.500	1/4-28	#10	0.500	1/8	0.625	1.438	0.875	2.688	22°	1.563	7/16-20
2"	0.750	0.750	1/4-28	#10	0.625	1/8	0.625	1.438	0.875	2.688	22°	1.563	1/2-20
2-1/2"	0.625	0.500	5/16-24	1/4	0.500	1/4	0.750	1.750	1.063	3.250	25°	1.875	7/16-20
2-1/2"	0.750	0.750	5/16-24	1/4	0.625	1/4	0.750	1.750	1.063	3.250	25°	1.875	1/2-20
3"	1.000	0.875	5/16-24	1/4	0.875	1/4	0.750	1.875	1.188	3.781	21°	2.125	3/4-16
4"	1.000	0.875	3/8-24	5/16	0.875	1/4	0.750	1.875	1.188	4.938	21°	2.750	3/4-16




C Series Rugged Compact

NUMATICS®


Flange Mounts

Front Flange

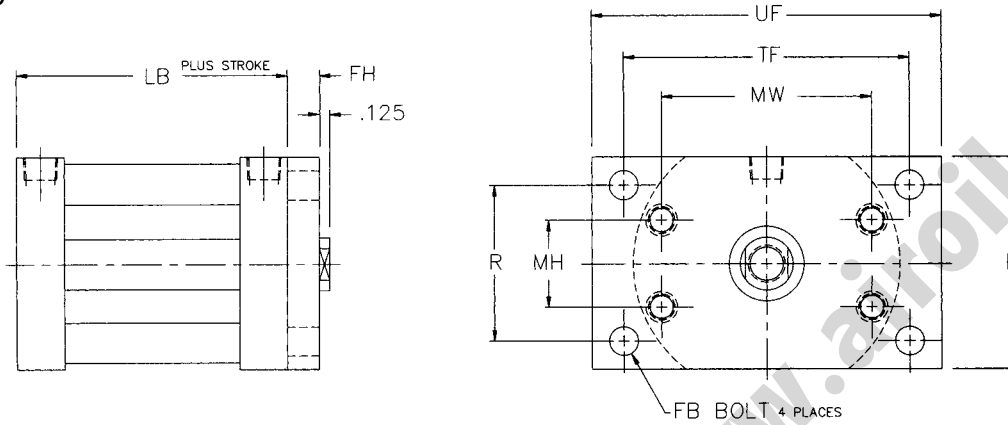

Mount Code F1

Rear Flange

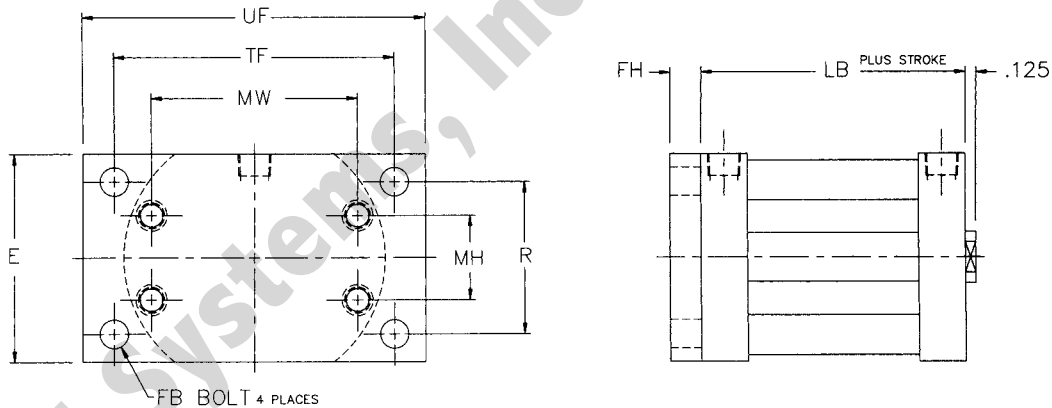

Mount Code F2


Dimensions

BORE	E	FB	FH	LB	MH	MW	R	TF	UF
3/4"	1.250	#8	.250	.950	N/A	1.375	.813	1.813	2.250
1-1/8"	1.750	#10	.250	.950	N/A	1.793	1.282	2.250	2.750
1-1/2"	2.000	5/16	.375	1.438	.770	2.114	1.430	2.750	3.375
2"	2.500	3/8	.375	1.438	1.029	2.483	1.840	3.375	4.125
2-1/2"	3.000	3/8	.375	1.750	1.363	2.922	2.190	3.875	4.625
3"	3.500	5/16	.438	1.875	1.585	3.399	2.625	4.375	5.000
4"	4.500	7/16	.625	1.875	2.060	4.418	3.320	5.438	6.250



Clevis Mounts


Fixed Clevis

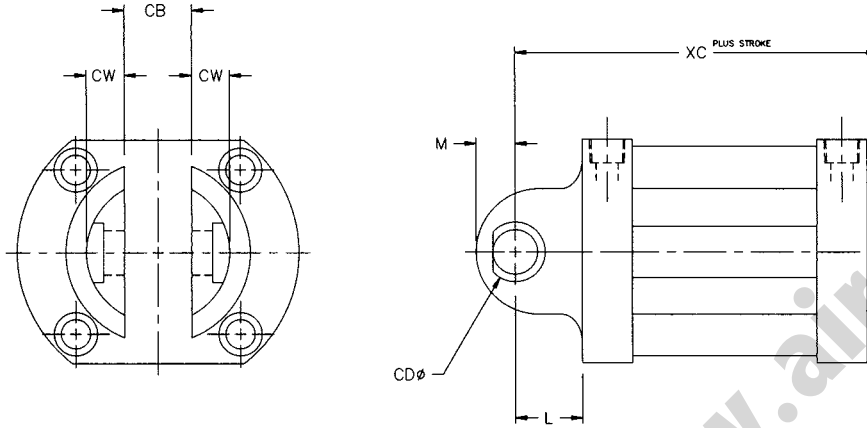

Mount Code P1

NOTE: Includes clevis pin.

Detachable Clevis

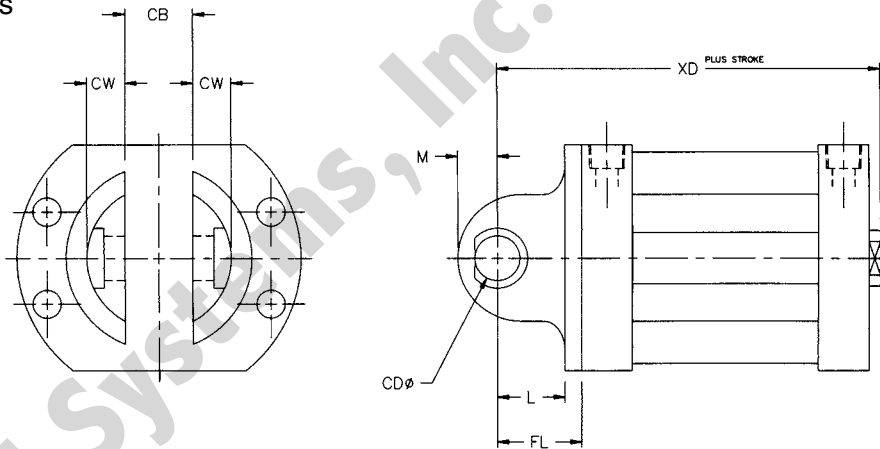

Mount Code P2

NOTE: Includes clevis pin.

Dimensions

BORE	CB	CD	CW	FL	L	M	XC	XD
3/4"	0.375	0.188	0.302	0.688	0.500	0.474	N/A	1.763
1-1/8"	0.375	0.188	0.302	0.688	0.500	0.474	N/A	1.763
1-1/2"	0.750	0.375	0.424	0.813	0.625	0.438	2.188	2.375
2"	0.750	0.375	0.424	0.938	0.750	0.438	2.313	2.500
2-1/2"	0.750	0.375	0.424	1.000	0.750	0.500	2.625	2.875
3"	1.000	0.625	0.553	1.313	1.063	0.625	3.063	3.313
4"	1.000	0.625	0.553	1.688	1.438	0.625	3.438	3.688





C Series Rugged Compact

NUMATICS®

Eye Mounts



Fixed Eye

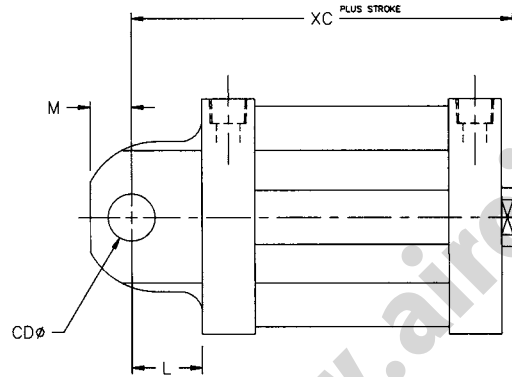

Mount Code P3

NOTE: Includes clevis pin.

Detachable Eye

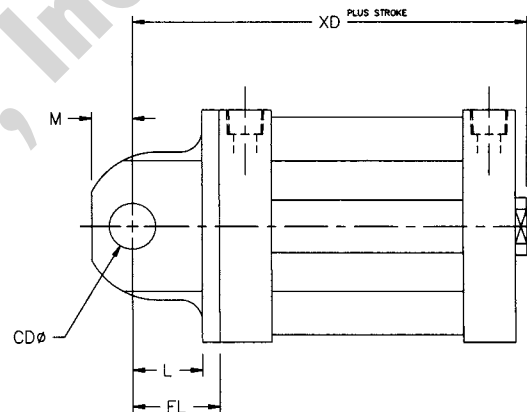

Mount Code P4

NOTE: Includes clevis pin.


Dimensions

BORE	CB	CD	FL	L	M	XC	XD
3/4"	0.375	0.188	0.688	0.500	0.490	N/A	1.763
1-1/8"	0.375	0.188	0.688	0.500	0.490	N/A	1.763
1-1/2"	0.750	0.375	0.813	0.625	0.438	2.188	2.375
2"	0.750	0.375	0.938	0.750	0.438	2.313	2.500
2-1/2"	0.750	0.375	1.000	0.750	0.500	2.625	2.875
3"	1.000	0.625	1.313	1.063	0.625	3.063	3.313
4"	1.000	0.625	1.688	1.438	0.625	3.438	3.688




Bottom Mounts

3/4" And 1 1/8" Bores - Bottom Tapped (Standard)

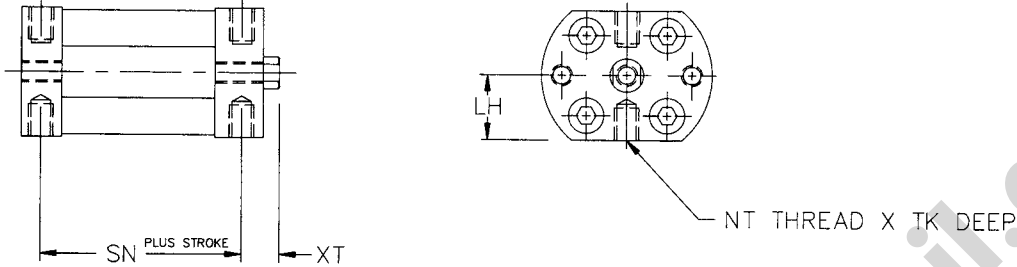


Mount Code S4 (Standard)

1 1/2" Through 4" Bores - Bottom Tapped

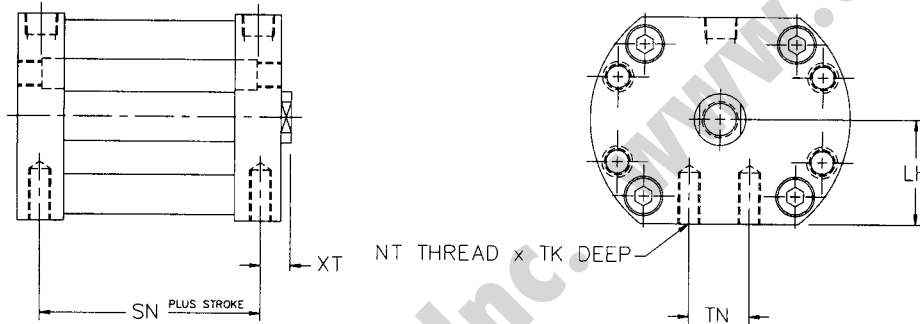

Mount Code S4

1 1/2" Through 4" Bores - Base Bar Mount

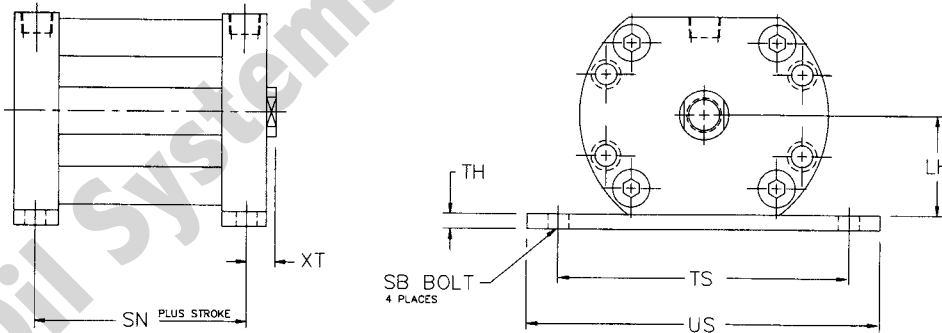

Mount Code S2

Dimensions

BORE	LH	NT	SB	SN	TH	TK	TN	TS	US	XT
3/4"	0.625	#10-32	N/A	0.638	N/A	0.250	N/A	N/A	N/A	0.293
1-1/8"	0.875	#10-32	N/A	0.638	N/A	0.250	N/A	N/A	N/A	0.293
1-1/2"	1.000	1/4-28	1/4	0.813	0.250	0.375	0.625	2.875	3.375	0.438
2"	1.250	1/4-28	1/4	0.813	0.250	0.375	0.750	3.375	3.875	0.438
2-1/2"	1.500	5/16-24	5/16	1.000	0.250	0.500	1.125	4.000	4.375	0.500
3"	1.750	5/16-24	5/16	1.125	0.375	0.500	1.625	4.500	4.875	0.500
4"	2.250	3/8-24	3/8	1.125	0.375	0.750	1.625	5.750	6.250	0.500




C Series Rugged Compact

NUMATICS®


Single Acting Cylinders

Spring Extend

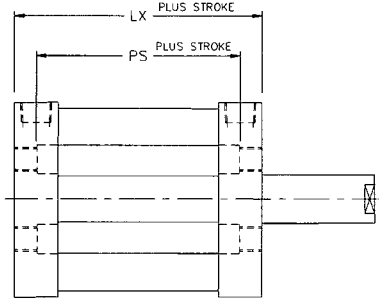


Order as "SE" option

Spring Return




Order as "SR" option

Bottom Tapped with SE or SR option



Mount Code S4

Base Bar Mount with SE or SR option



Mount Code S2

(Consult factory for strokes greater than 2")


Dimensions

BORE	"STROKES UP TO 1"					"STROKES OVER 1" UP TO 2"				
	LX	PS	SX	XV	XY	LX	PS	SX	XV	XY
3/4"	1.950	1.638	1.638	N/A	2.763	2.950	2.638	2.638	N/A	3.763
1-1/8"	1.950	1.638	1.638	N/A	2.763	2.950	2.638	2.638	N/A	3.763
1-1/2"	2.688	2.125	2.063	3.438	3.625	3.938	3.375	3.313	4.688	4.875
2"	2.813	2.250	2.188	3.688	3.875	4.188	3.625	3.563	5.063	5.250
2-1/2"	3.125	2.438	2.375	4.000	4.250	4.500	3.813	3.750	5.375	5.625
3"	3.375	2.688	2.625	4.563	4.813	4.875	4.188	4.125	6.063	6.313
4"	3.375	2.688	2.625	4.938	5.188	4.875	4.188	4.125	6.438	6.688




Single Acting Cylinders continued

Detachable Eye with SE or SR option

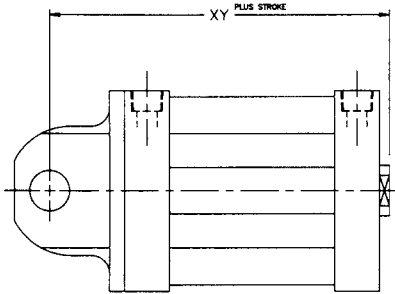


Mount Code P4

Detachable Clevis with SE or SR option

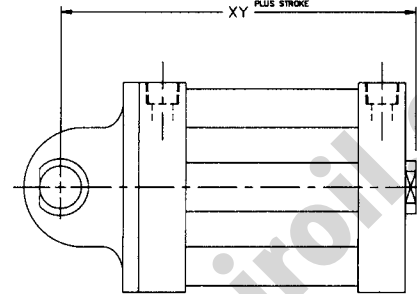


Mount Code P2

Fixed Eye with SE or SR option

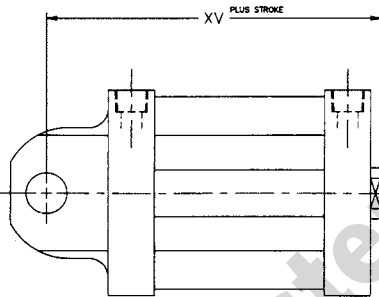

Mount Code P3

Fixed Clevis with SE or SR option

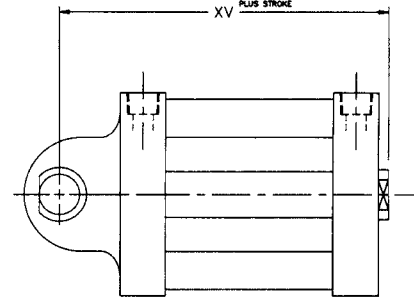

Mount Code P1

(Consult factory for strokes greater than 2")

Dimensions

BORE	"STROKES UP TO 1"					"STROKES OVER 1" UP TO 2"				
	LX	PS	SX	XV	XY	LX	PS	SX	XV	XY
3/4"	1.950	1.638	1.638	N/A	2.763	2.950	2.638	2.638	N/A	3.763
1-1/8"	1.950	1.638	1.638	N/A	2.763	2.950	2.638	2.638	N/A	3.763
1-1/2"	2.688	2.125	2.063	3.438	3.625	3.938	3.375	3.313	4.688	4.875
2"	2.813	2.250	2.188	3.688	3.875	4.188	3.625	3.563	5.063	5.250
2-1/2"	3.125	2.438	2.375	4.000	4.250	4.500	3.813	3.750	5.375	5.625
3"	3.375	2.688	2.625	4.563	4.813	4.875	4.188	4.125	6.063	6.313
4"	3.375	2.688	2.625	4.938	5.188	4.875	4.188	4.125	6.438	6.688




C Series Rugged Compact

NUMATICS®

Double Rod Cylinders


This configuration has a piston rod which extends out both ends of the cylinder. It is also called a through rod cylinder.

3/4" and 1 1/8" Bores

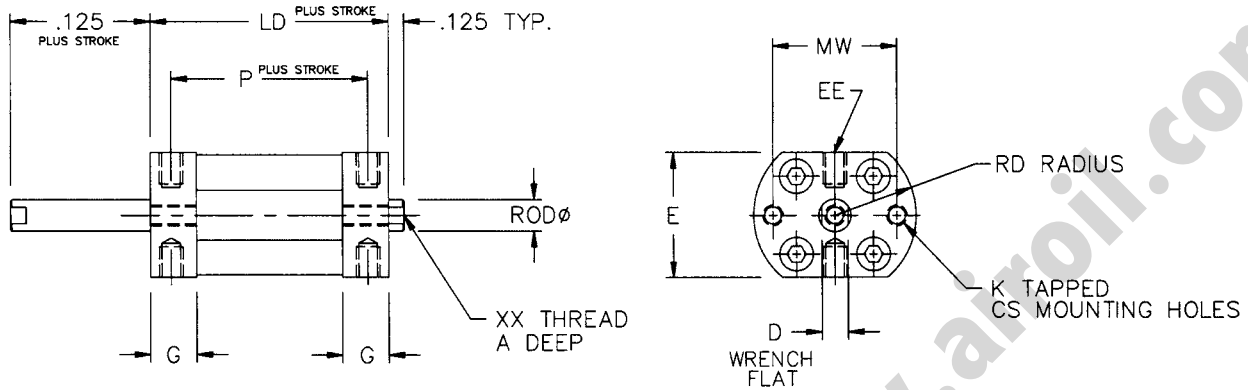

Order as "DA" Option

1 1/2" Through 4" Bores

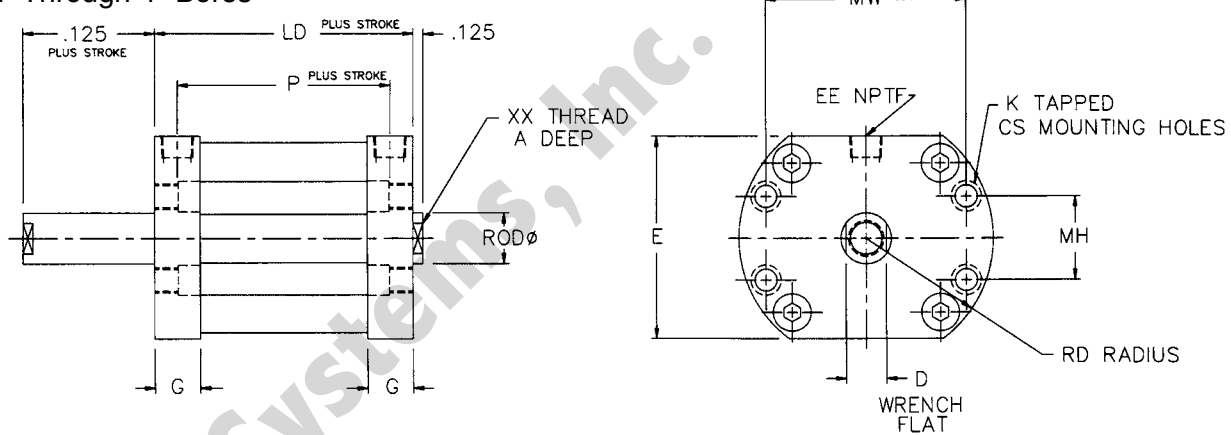

Order as "DA" Option

Basic Cylinder Dimensions


BORE	ROD	A	CS	D	E	EE+	G	K	LD	MH	MW	P	RD	XX
3/4"	0.250	0.375	#5	0.212	1.250	#10-32	0.406	#8-32	1.013	N/A	1.375	0.678	0.844	#8-32
1-1/8"	0.500	0.375	#6	0.375	1.750	#10-32	0.406	#10-32	1.013	N/A	1.793	0.678	1.125	1/4-28
1-1/2"	0.625	0.500	#10	0.500	2.000	1/8	0.625	1/4-28	1.438	0.770	2.114	0.875	1.313	7/16-20
1-1/2"	0.750	0.750	#10	0.625	2.000	1/8	0.625	1/4-28	1.438	0.770	2.114	0.875	1.313	1/2-20
2"	0.625	0.500	1/4	0.500	2.500	1/8	0.625	5/16-24	1.438	1.029	2.483	0.875	1.575	7/16-20
2"	0.750	0.750	1/4	0.625	2.500	1/8	0.625	5/16-24	1.438	1.029	2.483	0.875	1.575	1/2-20
2-1/2"	0.625	0.500	1/4	0.500	3.000	1/4	0.750	5/16-24	1.750	1.363	2.922	1.063	1.875	7/16-20
2-1/2"	0.750	0.750	1/4	0.625	3.000	1/4	0.750	5/16-24	1.750	1.363	2.922	1.063	1.875	1/2-20
3"	1.000	0.875	1/4	0.875	3.500	1/4	0.750	5/16-24	1.875	1.585	3.399	1.188	2.125	3/4-16
4"	1.000	0.875	5/16	0.875	4.500	1/4	0.750	3/8-24	1.875	2.060	4.418	1.188	2.750	3/4-16



Back to Back Cylinders


3/4" and 1 1/8" Bores

This configuration is two cylinders mounted back to back. Each cylinder can be operated independently. The cylinders can have the same stroke or different strokes. This configuration enables you to have four combinations of rods extended or retracted.

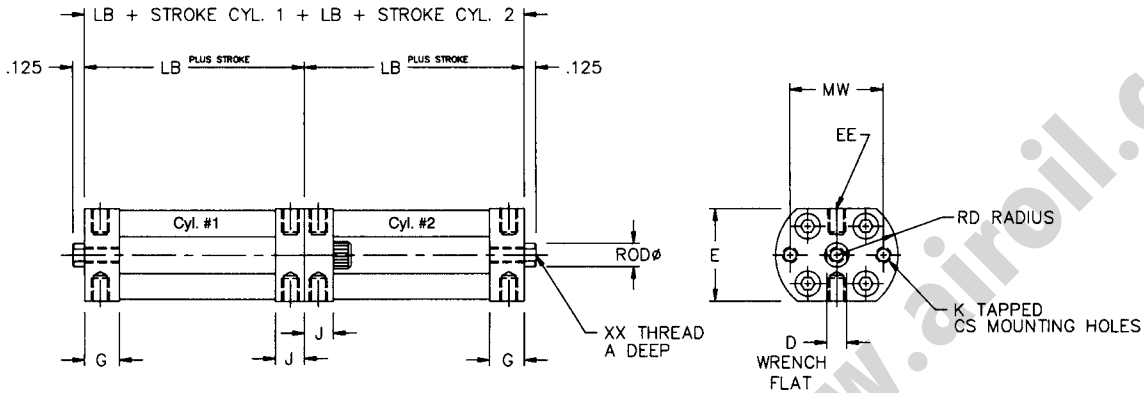

Consult factory for ordering.

1 1/2" Through 4" Bores

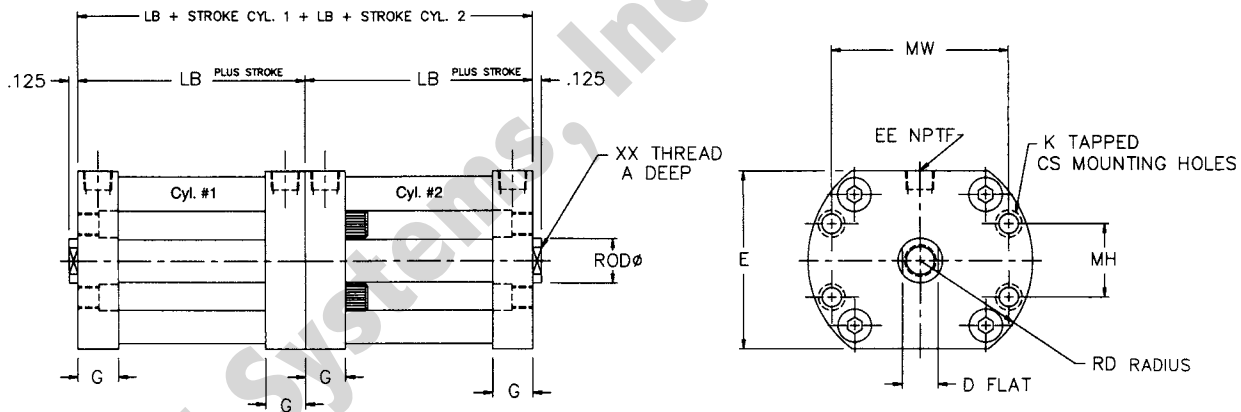

Basic Cylinder Dimensions


BORE	ROD	A	CS	D	E	EE	G	J	K	LB	MH	MW	RD	XX
1-1/8"	0.500	0.375	#6	0.375	1.750	#10-32	0.406	0.343	#10-32	0.950	N/A	1.793	1.125	1/4-28
1-1/2"	0.625	0.500	#10	0.500	2.000	1/8	0.625	N/A	1/4-28	1.438	0.770	2.114	1.313	7/16-20
1-1/2"	0.750	0.750	#10	0.625	2.000	1/8	0.625	N/A	1/4-28	1.438	0.770	2.114	1.313	1/2-20
2"	0.625	0.500	1/4	0.500	2.500	1/8	0.625	N/A	5/16-24	1.438	1.029	2.483	1.575	7/16-20
2"	0.750	0.750	1/4	0.625	2.500	1/8	0.625	N/A	5/16-24	1.438	1.029	2.483	1.575	1/2-20
2-1/2"	0.625	0.500	1/4	0.500	3.000	1/4	0.750	N/A	5/16-24	1.750	1.363	2.922	1.875	7/16-20
2-1/2"	0.750	0.750	1/4	0.625	3.000	1/4	0.750	N/A	5/16-24	1.750	1.363	2.922	1.875	1/2-20
3"	1.000	0.875	1/4	0.875	3.500	1/4	0.750	N/A	5/16-24	1.875	1.585	3.399	2.125	3/4-16
4"	1.000	0.875	5/16	0.875	4.500	1/4	0.750	N/A	3/8-24	1.875	2.060	4.418	2.750	3/4-16



C Series Rugged Compact

Tandem Cylinders

This configuration provides nearly twice the force of an equivalent basic double acting cylinder. Two pistons are attached to a common piston rod. Ports 2 and 4 are pressurized to nearly double the extend force. Ports 1 and 3 are pressurized to double the retract force.

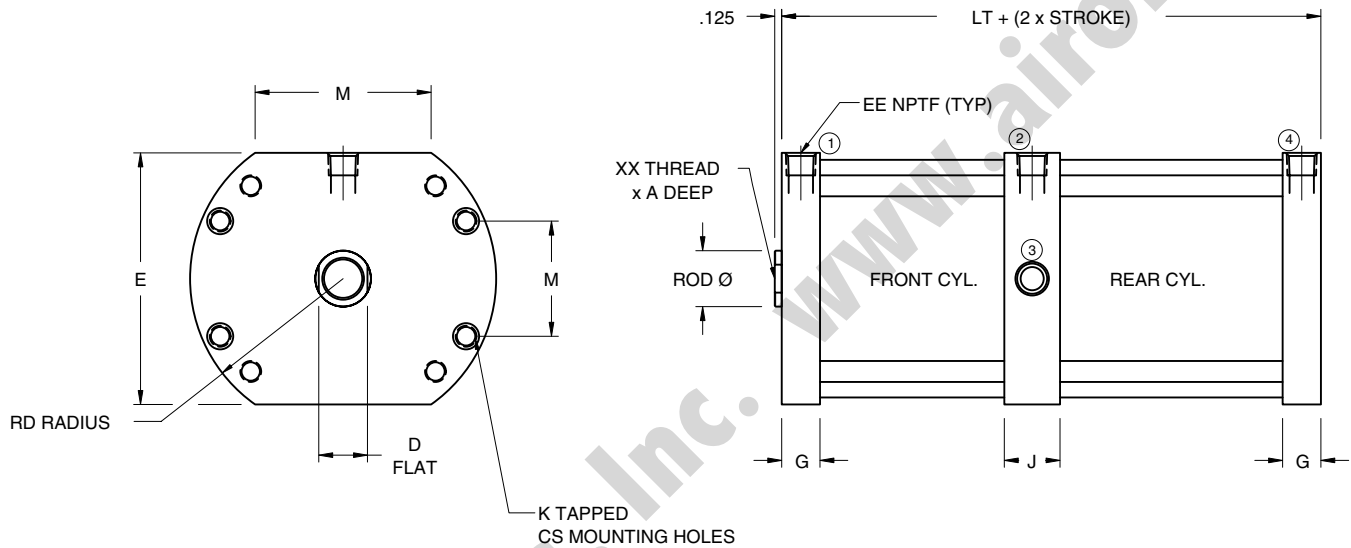


Basic Cylinder Dimensions

BORE	ROD	A	CS	D	E	EE	G	J	K	LT	MH	MW	RD	XX
1-1/2"	0.625	0.500	#10	0.500	2.000	1/8	0.625	0.688	1/4-28	2.313	0.770	2.114	1.313	7/16-20
1-1/2"	0.750	0.750	#10	0.625	2.000	1/8	0.625	0.688	1/4-28	2.313	0.770	2.114	1.313	1/2-20
2"	0.625	0.500	1/4	0.500	2.500	1/8	0.625	0.688	5/16-24	2.313	1.029	2.483	1.575	7/16-20
2"	0.750	0.750	1/4	0.625	2.500	1/8	0.625	0.688	5/16-24	2.313	1.029	2.483	1.575	1/2-20
2-1/2"	0.625	0.500	1/4	0.500	3.000	1/4	0.750	0.813	5/16-24	2.313	1.363	2.922	1.875	7/16-20
2-1/2"	0.750	0.750	1/4	0.625	3.000	1/4	0.750	0.813	5/16-24	2.313	1.363	2.922	1.875	1/2-20
3"	1.000	0.875	1/4	0.875	3.500	1/4	0.750	0.813	5/16-24	3.063	1.585	3.399	2.125	3/4-16
4"	1.000	0.875	5/16	0.875	4.500	1/4	0.750	0.813	3/8-24	3.063	2.060	4.418	2.750	3/4-16



Multi-Position Cylinders

Multi-position cylinders look similar to tandem cylinders. However, in this cylinder the rear and front piston rods are separate. The stroke from full retract to the intermediate extend point is set by the stroke of cylinder #2. The total stroke for full retract to full extend is set by the stroke of cylinder #1. Full extend or retract is achieved by pressurizing ports 1 and 2 respectively with ports 3 and 4 vented. An intermediate position is achieved by pressurizing port 4 with the other ports vented or by pressurizing both ports 1 and 4. With 1 and 4 pressurized, the rod is more positively held in the intermediate position.

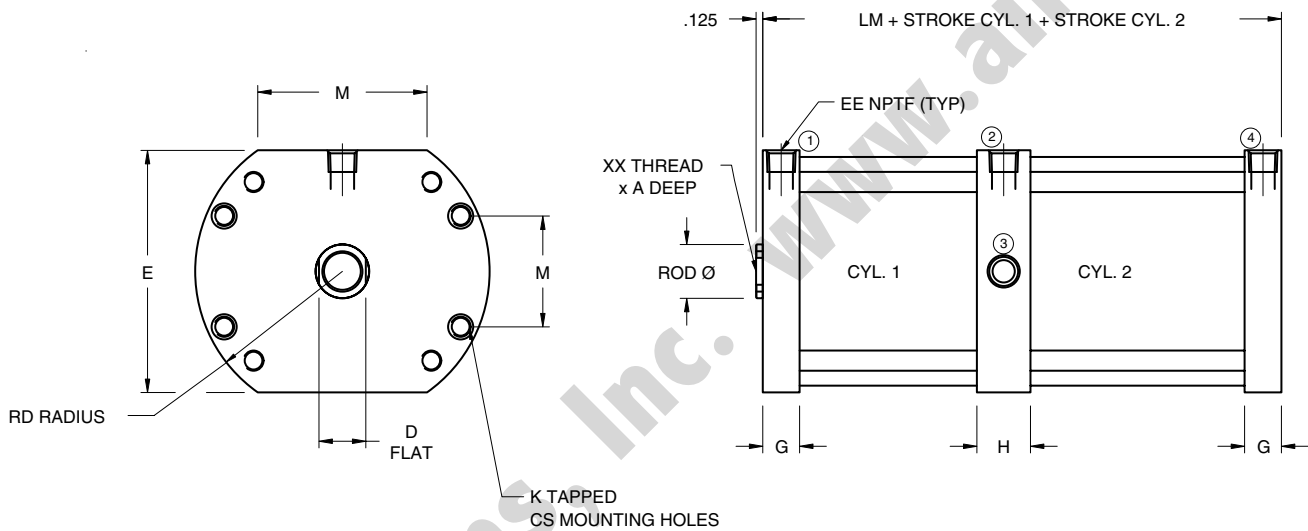

Basic Cylinder Dimensions

BORE	ROD	A	CS	D	E	EE	G	H	K	LM	MH	MW	RD	XX
1-1/2"	0.625	0.500	#10	0.500	2.000	1/8	0.625	0.875	1/4-28	2.500	0.770	2.114	1.313	7/16-20
1-1/2"	0.750	0.750	#10	0.625	2.000	1/8	0.625	0.875	1/4-28	2.500	0.770	2.114	1.313	1/2-20
2"	0.625	0.500	1/4	0.500	2.500	1/8	0.625	0.875	5/16-24	2.500	1.029	2.483	1.575	7/16-20
2"	0.750	0.750	1/4	0.625	2.500	1/8	0.625	0.875	5/16-24	2.500	1.029	2.483	1.575	1/2-20
2-1/2"	0.625	0.500	1/4	0.500	3.000	1/4	0.750	1.000	5/16-24	3.000	1.363	2.922	1.875	7/16-20
2-1/2"	0.750	0.750	1/4	0.625	3.000	1/4	0.750	1.000	5/16-24	3.000	1.363	2.922	1.875	1/2-20
3"	1.000	0.875	1/4	0.875	3.500	1/4	0.750	1.125	5/16-24	3.375	1.585	3.399	2.125	3/4-16
4"	1.000	0.875	5/16	0.875	4.500	1/4	0.750	1.125	3/8-24	3.375	2.060	4.418	2.750	3/4-16




C Series Rugged Compact

NUMATICS®


Accessories

Clevis Bracket

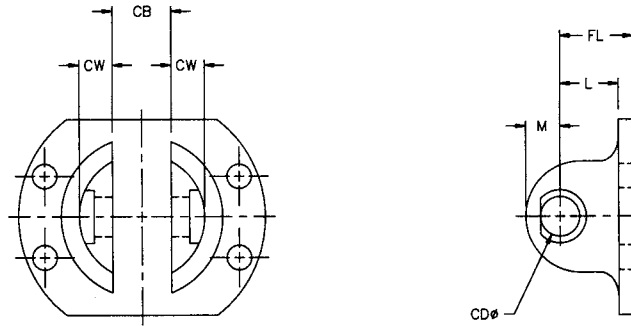


Note: Only two mounting holes on the 3/4" and 1-1/8" bore sizes.


Eye Bracket

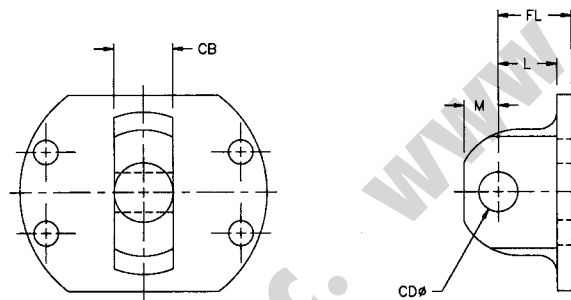


Base Bar

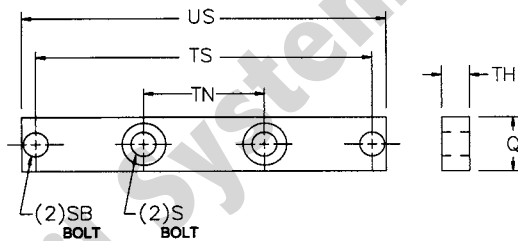

Clevis Pins - 3/4" and 1 1/8" Bores *



Clevis Pins - 1 1/2" Through 4" Bores *



* Included with P1, P2, P3 and P4 mounts


Dimensions

BORE	CLEVIS KIT	EYE KIT	PIVOT PIN	CB	CD	CL	CW	FL	L	M CLEVIS	M EYE	Q	S	SB	TH	TN	TS	US
3/4"	C600-C05	C600-C06	N131-1014	0.375	0.188	1.100	0.302	0.688	0.500	0.474	0.490	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1-1/8"	C600-G05	C600-G06	N131-1014	0.375	0.188	1.100	0.302	0.688	0.500	0.474	0.490	N/A	N/A	N/A	N/A	N/A	N/A	N/A
1-1/2"	C600-K05	C600-K06	N131-1000	0.750	0.375	1.500	0.424	0.813	0.625	0.438	0.438	0.625	1/4	1/4	0.250	0.625	2.875	3.375
2"	C600-L05	C600-L06	N131-1000	0.750	0.375	1.500	0.424	0.938	0.750	0.438	0.438	0.625	1/4	1/4	0.250	0.750	3.375	3.875
2-1/2"	C600-M05	C600-M06	N131-1000	0.750	0.375	1.500	0.424	1.000	0.750	0.500	0.500	0.750	5/16	5/16	0.250	1.125	4.000	4.375
3"	C600-N05	C600-N06	N131-1001	1.000	0.625	2.125	0.553	1.313	1.063	0.625	0.625	0.750	5/16	5/16	0.375	1.625	4.500	4.875
4"	C600-R05	C600-R06	N131-1001	1.000	0.625	2.125	0.553	1.688	1.438	0.625	0.625	0.750	3/8	3/8	0.375	1.625	5.750	6.250




Accessories (continued)


Rod Clevis - 3/4" and 1 1/8" Bores

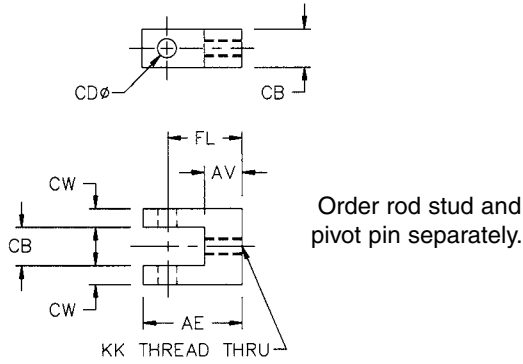


Rod Clevis - 1 1/2" Through 4" Bores

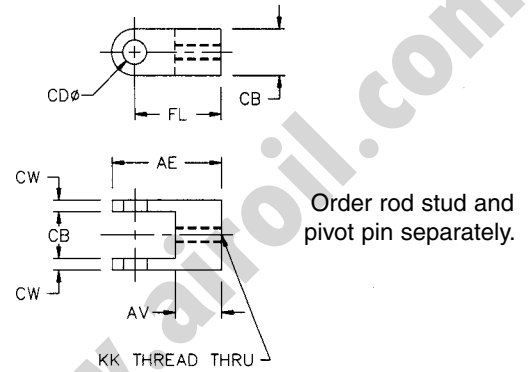

Rod Eye - 3/4" and 1 1/8" Bores

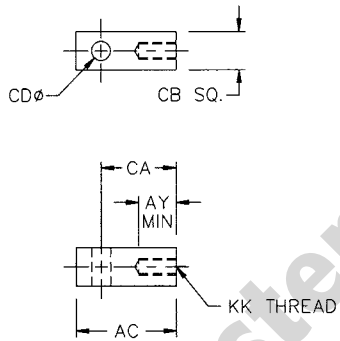

Rod Eye - 1 1/2" Through 4" Bores

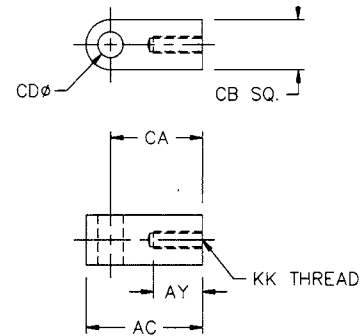

Dimensions

BORE	EYE	CLEVIS	AC	AE	AV	AY	AZ	CA	CB	CD	CL	CW	FL	KK
3/4"	C500-706	C500-606	0.938	0.938	0.375	0.375	0.750	0.750	0.375	0.188	0.750	0.188	0.750	#8-32
1-1/8"	B500-708	B500-608	0.938	0.938	0.375	0.375	0.750	0.750	0.375	0.188	0.750	0.188	0.750	1/4-28
1-1/2"	C500-701	C500-601	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
1-1/2"	C500-702	C500-602	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
2"	C500-701	C500-601	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
2"	C500-702	C500-602	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
2-1/2"	C500-701	C500-601	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
2-1/2"	C500-702	C500-602	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
3"	C500-703	C500-603	1.500	2.188	0.750	0.500	1.375	1.000	1.000	0.625	1.500	0.250	1.688	3/4-16
4"	C500-703	C500-603	1.500	2.188	0.750	0.500	1.375	1.000	1.000	0.625	1.500	0.250	1.688	3/4-16




C Series Rugged Compact


NUMATICS®

Accessories (continued)


Rod Stud



Clevis Pins - 3/4" and 1 1/8" Bores



Clevis Pins - 1 1/2" Through 4" Bores



Dimensions


BORE	ROD STUD	PIVOT PIN	AC	AE	AV	AY	AZ	CA	CB	CD	CL	CW	FL	KK
3/4"	C500-506	C500-406	0.938	0.938	0.375	0.375	0.750	0.750	0.375	0.188	0.750	0.188	0.750	#8-32
1-1/8"	C500-508	C500-406	0.938	0.938	0.375	0.375	0.750	0.750	0.375	0.188	0.750	0.188	0.750	1/4-28
1-1/2"	C500-502	C500-403	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
1-1/2"	C500-503	C500-403	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
2"	C500-502	C500-403	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
2"	C500-503	C500-403	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
2-1/2"	C500-502	C500-403	1.093	1.375	0.600	0.375	0.875	0.718	0.750	0.375	1.125	0.188	1.000	7/16-20
2-1/2"	C500-503	C500-403	1.093	1.375	0.600	0.375	1.125	0.718	0.750	0.375	1.125	0.188	1.000	1/2-20
3"	C500-505	C500-404	1.500	2.188	0.750	0.500	1.375	1.000	1.000	0.625	1.500	0.250	1.688	3/4-16
4"	C500-505	C500-404	1.500	2.188	0.750	0.500	1.375	1.000	1.000	0.625	1.500	0.250	1.688	3/4-16



C series World application Detail


Round Tube and Tie Rod Detail

1. World Switch
2. Tie Rod Bracket
3. Cylinder Tie Rod



Profile Tube Detail

1. World Switch
2. Dove Tail extrusion




C series World Switch Bracket

Cylinders	Bore	Part Number
C series Profile	3/4"-2 1/2"	Direct Fit
C series Tie Rod	3" Bore	SB6-L01
C series Tie Rod	4" Bore	SB6-P01


C series World Switch Hall Effect Part Numbers

P/N	Switch Style	Switch Type	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop
SH6-031	3m Wire Version	Hall Effect for Reed Magnet & Light Sourcing	Normally Open Sourcing (PNP)	6 -24 VDC	0.3 Amps Max.	7.2 Watts Max.	0.5 Volts
SH6-021	8m Connector Pigtail	Hall Effect for Reed Magnet & Light Sourcing	Normally Open Sourcing (PNP)	6 -24 VDC	0.3 Amps Max.	7.2 Watts Max.	0.5 Volts
SH6-032	3m Wire Version	Hall Effect for Reed Magnet & Light Sourcing	Normally Open Sourcing (NPN)	6 -24 VDC	0.3 Amps Max.	7.2 Watts Max.	0.5 Volts
SH6-022	8m Connector Pigtail	Hall Effect for Reed Magnet & Light Sourcing	Normally Open Sourcing (NPN)	6 -24 VDC	0.3 Amps Max.	7.2 Watts Max.	0.5 Volts


Hall Effect Switch

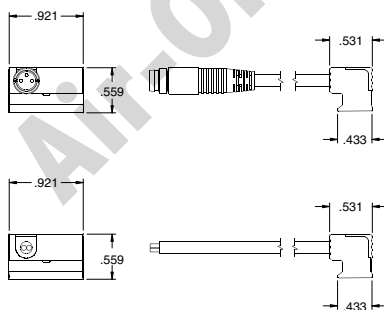

PNP Sourcing

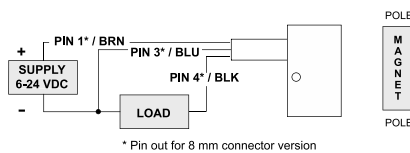

NPN Sinking

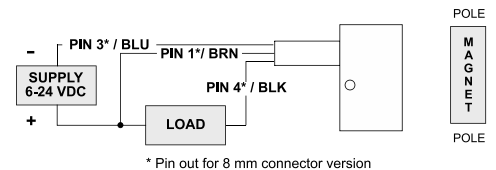




C Series Rugged Compact

NUMATICS®


C Series World Switch Reed Switch Part Numbers

P/N	Switch Style	Switch Type	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop
SR6-002	3m Wire Version	Reed Switch, LED	SPST Normally Open	5 - 120V AC/DC	0.025 Amps Max. 0.001 Amps Min.	3 Watts Max.	3.5 Volts
SR6-004	3m Wire Version	Reed Switch, LED & MOV	SPST Normally Open	5 - 120V AC/DC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts
SR6-021	8mm Pigtail	Reed Switch	SPST Normally Open	0 - 120V AC/DC	0.5 Amps Max.	10 Watts Max.	0 Volts
SR6-022	8mm Pigtail	Reed Switch, LED	SPST Normally Open	5 - 120V AC/DC	0.025 Amps Max. 0.001 Amps Min.	3 Watts Max.	3.5 Volts
SR6-024	8mm Pigtail	Reed Switch, LED & MOV	SPST Normally Open	5 - 120V AC/DC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts

Reed Switch - Normally Open Type SR6

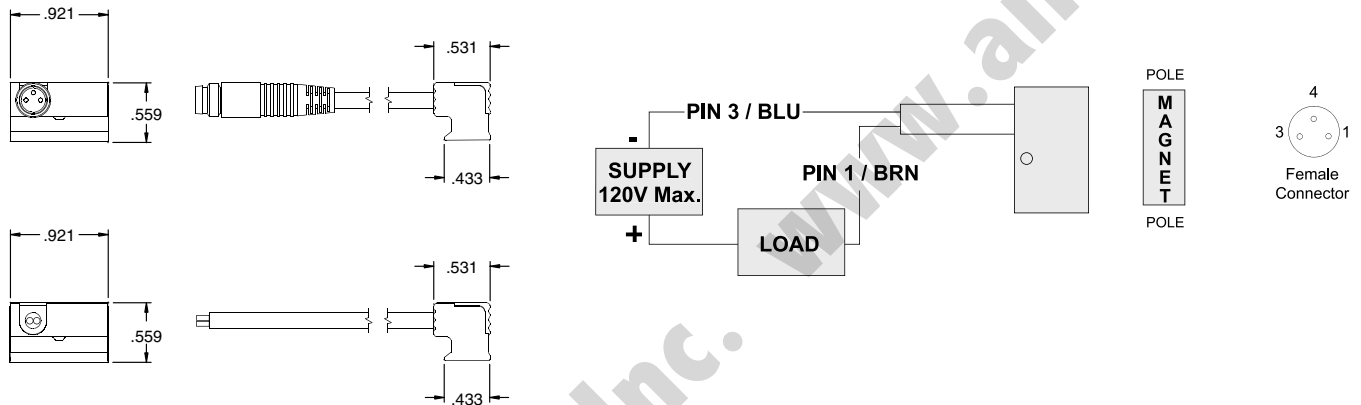

Cords M8-thread for Switches and Sensors with Connector

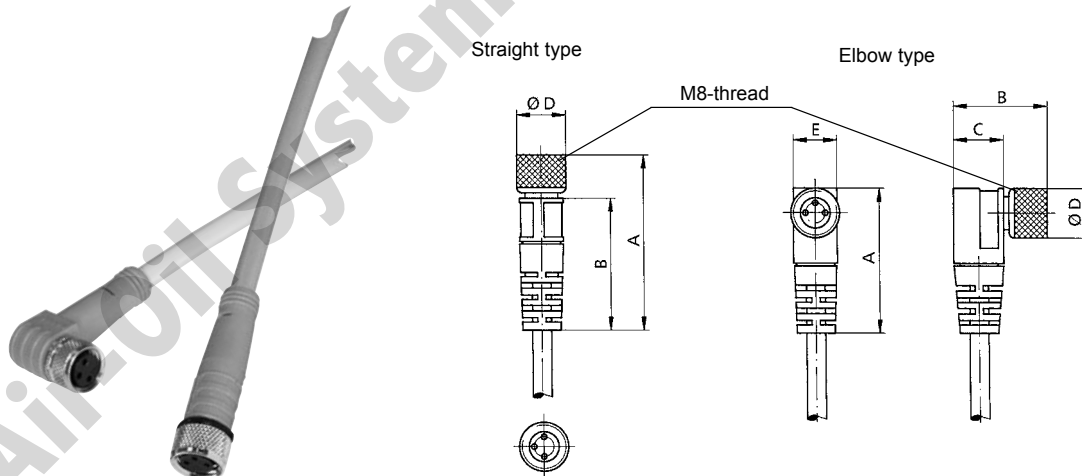

Dimensions (mm)


Type		A	B	C	D	E	Weight (approx. kg)	Order Code
Straight with 5m-cable	(3x0.25 mm ²)	32.3	24.4	—	9.0	—	0.143	SC6-001
Elbow with 5m-cable	(3x0.25 mm ²)	26.3	17.1	9.2	9.0	8.0	0.145	SC6-002



C Series Global application Detail


Round Tube and Tie Rod Detail

1. Global Switch
2. Tie Rod Bracket
3. Cylinder Tie Rod



Profile Tube Detail

1. Global Switch
2. Included Dovetail adapter
3. Dove Tail extrusion





C Series Global Switch Bracket

Cylinders	Bore	Part Number
C series Profile	3/4"-2 1/2" Bore	Direct Fit w/included adapter
C series Tie Rod	3" Bore	N199-1017
C series Tie Rod	4" Bore	N199-1018

C Series Global Switches

Reed Switch (AC/DC NO), flying lead - RSS02, 8mm connector - RSQ02

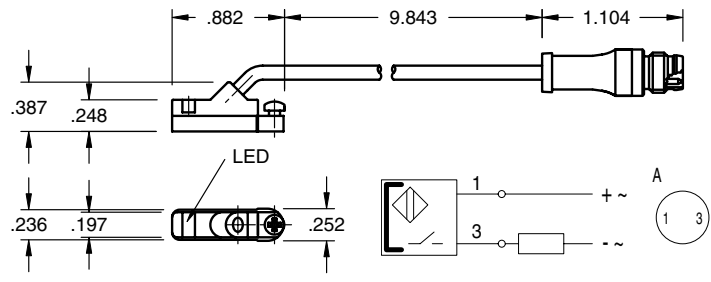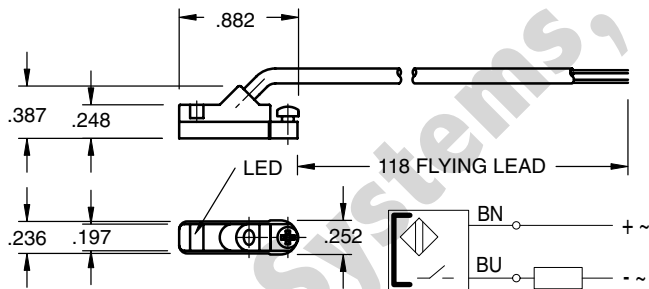

Sensing Data

Ambient temperature range T_a	(°F/°C)	-4 to 176 (-20 to 80)
Frequency of operating cycles f at U_e	(kHz)	0.5
Turn on time t	(ms)	≤ 0.25
Turn off time t	(ms)	0.03
LED function indication		yes

Electrical Data

Rated operational voltage U_e	(V)	3...130 AC/DC
Supply voltage U_B	(V)	3...130 AC/DC
Voltage drop U_d at I_e Stat./dyn.	(V)	3.5
Rated insulation voltage U_i	(V)	2750 DC (EN 60335-1)
Rated supply frequency	(Hz)	AC/DC
Rated operational current I_e	(mA)	50 (10W max.)
No-load supply current I_o at U_e d./und.	(mA)	0

Observe polarity for correct LED function

Mechanical Data

Housing material	Polyamide
Material of sensing face	Polyamide
Connection	PVC cable
Degree of Protection	IP 67
Rated shock: half-sinus, 50g, 11 ms	
Rated vibration environment: 10g, 10...2000 Hz. 90 min	







C Series Rugged Compact

NUMATICS®

Electronic Switch (PNP NO), flying lead - HPNPS31, 8mm connector - HPNPQ31

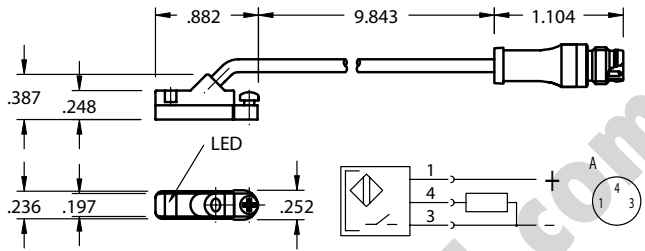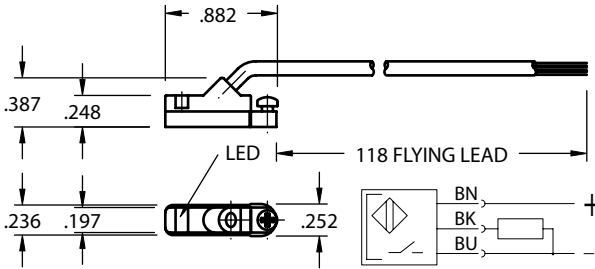

Sensing Data

Ambient temperature range ϑ	(°F/°C)	-13 to +158 (-25 to +70)
Temperature drift	(% of)	$\leq 0.3\%/^{\circ}\text{C}$
Frequency of operating cycles f at U_e	(kHz)	10
Turn on time t	(ms)	.05
turn off time t	(ms)	.05
Utilization categories		DC13
Function-supply voltage indication		YES

Mechanical Data



Housing material	Polyamide
Material of sensing face	Polyamide
Connection	PVC cable
Degree of Protection	IP 67
Rated shock: half-sinus, 30 g, 11 ms	
Rated vibration environment: 55 Hz, 1mm amplitude, 3 x 30	

Electrical Data

Rated operational voltage U_e	(V)	24 DC
Supply voltage U_B	(V)	10...30 DC
incl. ripple	(% of U_e)	15
Voltage drop U_d at I_e Stat./dyn.	(V)	1/-
Rated insulation voltage U_i	(V)	75 AC
Rated supply frequency	(Hz)	DC
Rated operational current I_e	(mA)	200
No-load supply current I_o at U_e d./und.	(mA)	25/13
Protected against polarity reversal		YES



Electronic Switch (NPN NO), flying lead - HNPNS32, 8mm connector - HNPNQ32

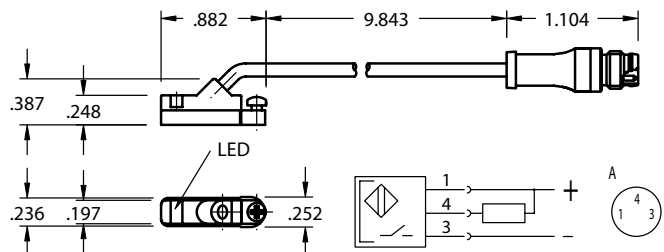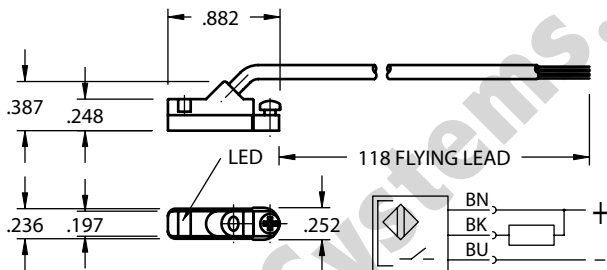

Sensing Data

Ambient temperature range ϑ	(°F/°C)	-13 to +158 (-25 to +70)
Temperature drift	(% of S_T)	$\leq 0.3\%/^{\circ}\text{C}$
Frequency of operating cycles f at U_e	(kHz)	10
Turn on time t	(ms)	.05
turn off time t	(ms)	.05
Utilization categories		DC13
Function-supply voltage indication		YES

Mechanical Data

Housing material	Polyamide
Material of sensing face	Polyamide
Connection	PVC cable
Degree of Protection	IP 67
Rated shock: half-sinus, 30 g, 11 ms	
Rated vibration environment: 55 Hz, 1mm amplitude, 3 x 30	

Electrical Data

Rated operational voltage U_e	(V)	24 DC
Supply voltage U_B	(V)	10...30 DC
incl. ripple	(% of U_e)	15
Voltage drop U_d at I_e Stat./dyn.	(V)	1/-
Rated insulation voltage U_i	(V)	75 AC
Rated supply frequency	(Hz)	DC
Rated operational current I_e	(mA)	200
No-load supply current I_o at U_e d./und.	(mA)	25/13
Protected against polarity reversal		YES





How to Order - C Series Piston Rod Assembly

C92 - K 3 1 A 0 - 01 A - AA

Type

C92 = C Series Piston Rod Assembly

Bore

- C = 3/4"
- G = 1-1/8"
- K = 1-1/2"
- L = 2"
- M = 2-1/2"
- N = 3"
- R = 4"

Rod Code

- 1 = Style #1 Standard Rod Diameter
- 2 = Style #2 Standard Rod Diameter
- 3 = Style #3 Standard Rod Diameter
- 4* = Special Rod End Standard Rod Diameter (must specify threads)
- 5* = Special Rod End Oversize Rod Diameter (must specify threads)
- 6 = Style #1 Oversize Rod Diameter
- 8 = Style #3 Oversize Rod Diameter

Mount

- 1 = All Mounts Except F1 & R1
- 2 = F1 Mount
- 3 = R1 Mount

Port

- A = All Port Sizes Other Than 1/8"
- B = 1/8" Ports

Magnet

- 0 = No Magnet
- 2 = Reed Magnet and Wear Band
- 4 = Electronic Switch Magnet

Option

- AA = No Option
- BC = Bumpered Cap End
- BH = Bumped Head End
- DA = Double Rod
- NA = Nickel Plated
- SA = Stainless Rod
- VA = Viton Seals
- WA = Wearband
- 1A* = Rod Extension
- 1B* = Rear Rod Extension
- 2A* = Thread Extension
- 2B* = Rear Thread Extension
- 3A = Rod Stud
- 3B = Rear Rod Stud
- 4A* = Stop Tube
- * Must specify length

Fractional Inches of Stroke

- A = 0" I = 1/2"
- B = 1/16" J = 9/16"
- C = 1/8" K = 5/8"
- D = 3/16" L = 11/16"
- E = 1/4" M = 3/4"
- F = 5/16" N = 13/16"
- G = 3/8" O = 7/8"
- H = 7/16" P = 15/16"
- Note: 1/8" minimum stroke.

Full Inch of Stroke

- 00 = 0" Stroke
- 01 = 1" Stroke
- 02 = 2" Stroke
- 03 = 3" Stroke
- 04 = 4" Stroke
- 20 = 20" Stroke (Maximum)

Note: Options listed are ones that apply to a piston rod assembly only. Model number is set up to use option code supplied with original cylinder or with any above.

Rod End Styles, Diameters and Threads


Bore	Diameter	Style #1 Optional Male	Style #2 Optional Female	Style #3 Standard Female
3/4"	0.250	#8-32	N/A	#8-32
1 1/8"	0.500	1/4-28	5/16-24	1/4-28
1 1/2"	0.625	7/16-20	3/8-24	7/16-20
	0.750	1/2-20	N/A	1/2-20
2"	0.625	7/16-20	N/A	7/16-20
	0.750	1/2-20	N/A	1/2-20
2 1/2"	0.625	7/16-20	N/A	7/16-20
	0.750	1/2-20	N/A	1/2-20
3"	1.000	3/4-16	5/8-18	3/4-16
4"	1.000	3/4-16	N/A	3/4-16



C Series Rugged Compact


NUMATICS®

How to Order - C Series Repair Kit

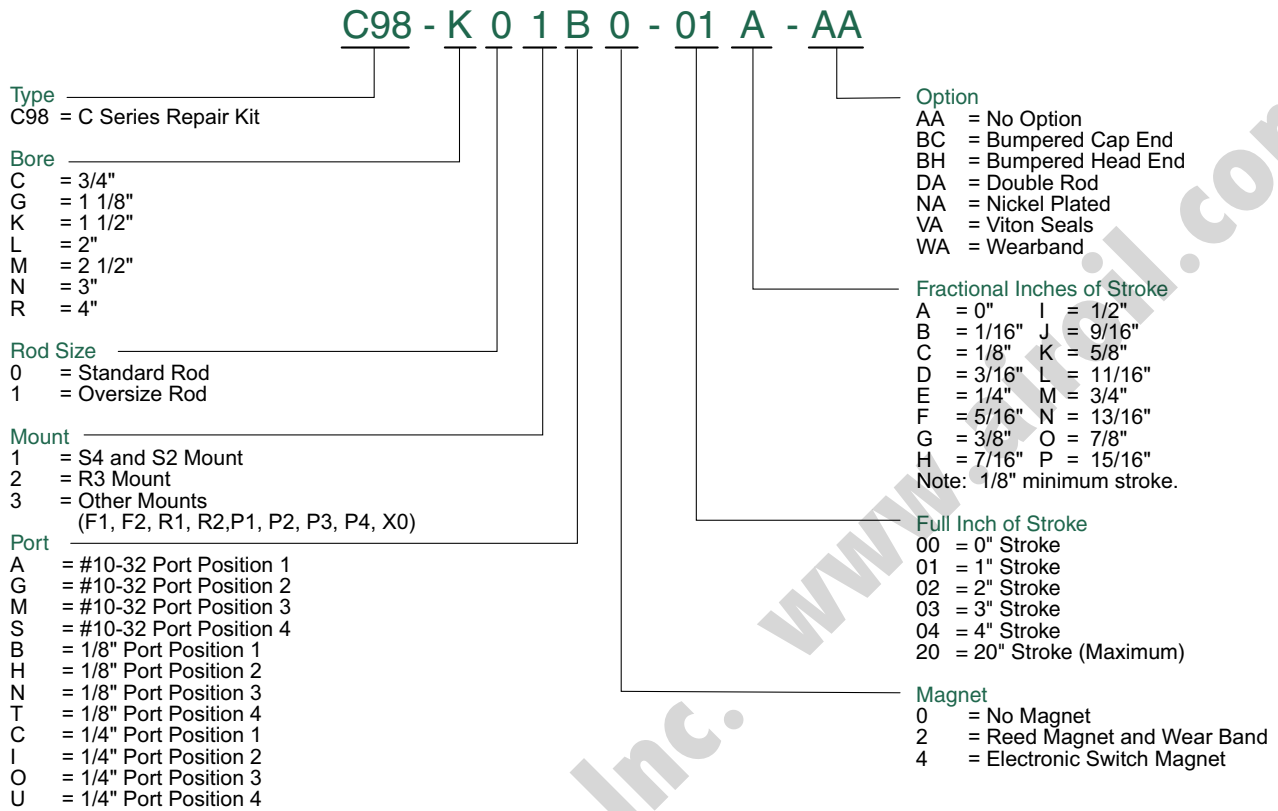

Note: Options listed are ones that apply to a repair kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

How to Order - C Series Seal Kit

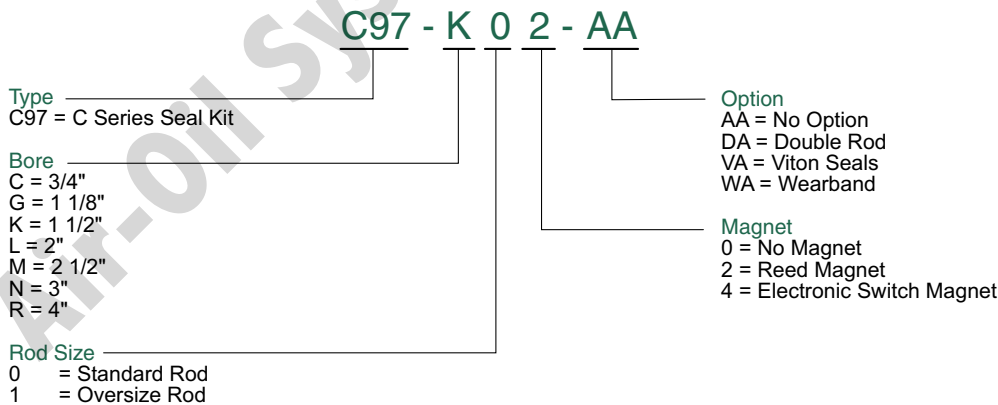

Note: Options listed are ones that apply to a seal kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

Note:
Tie Rod and Sleeve Nuts are Standard on 3" and 4" bore sizes.



Piston Rod Assembly Kit Removal/Installation Instructions

1. Loosen 4 Socket Head Cap Screws or 4 Sleeve Nuts (Part #13) to remove Head (Part #1) or Cap (Part #7).
2. Remove Head and Cap to access Piston/Rod Assembly (Part #8 & #9)
3. Carefully remove seal. (Part #10) Any damage to the seal grooves may result in leakage.
4. Lubricate piston seal with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
5. Install Quad Piston Seal (Part #10). Make sure the piston seal is not twisted inside groove.
6. Sink piston/rod assembly into sinker tube.
7. Apply lube inside the cylinder tube (Part #11).
8. Sink piston/rod assembly into cylinder tube.
9. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
10. Examine all seals before reassembling cylinder for any contamination. Contamination may cause leakage.
11. Lightly grease Rod Seal (Part #3). This will ease the installation of the loaded head over the rod.
12. Reassembly cylinder. Loosely torque 4 Socket Head Cap Screws or 4 Sleeve Nuts to allow head and cap to rotate slightly.
13. Before final torque, place cylinder on level surface. This will ensure that the cylinder head and cap are square. Torque Socket Head Cap Screws or Sleeve Nuts in a crisscross pattern. Use the following charts for torque tolerances for Socket Head Cap Screws or Sleeve Nuts.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 12-14.
See Seal Installation Guide on page 30 for additional (visual) instructions.



C Series Rugged Compact


NUMATICS®

Diagrams


Pneumatic Service Temperatures:

Nitrile Seals: -10°F (-23°C) to 165°F (74°C)


Viton® Seals: 0°F (-17°C) to 400°F (204°C)

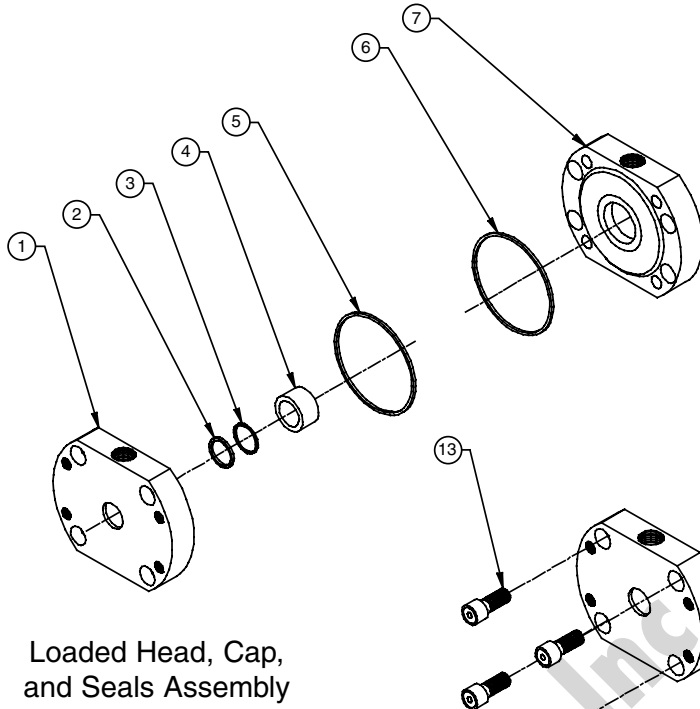

Loaded Head, Cap,
and Seals Assembly

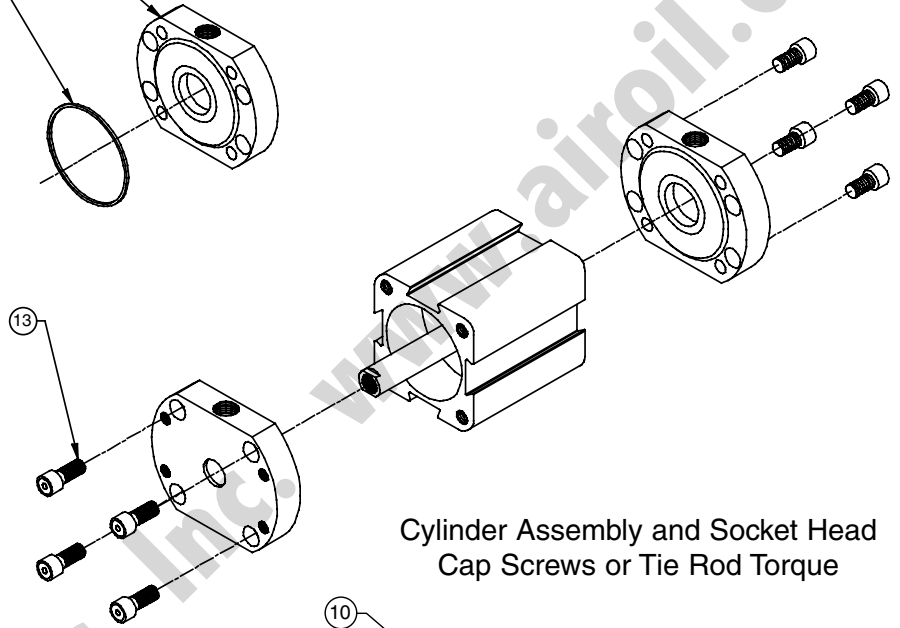

Cylinder Assembly and Socket Head
Cap Screws or Tie Rod Torque

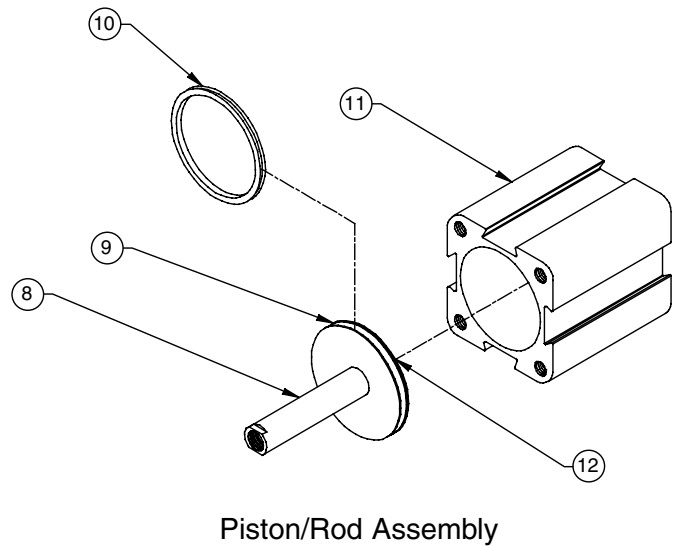

Piston/Rod Assembly

C Series

Part #	Description	Parts included in:		
		Seal Kit	Repair Kit	Piston/Rod Assembly
1	Head		X	
2	Back-up Ring	X	X	
3	Rod Seal	X	X	
4	Bushing		X	
5	Head Tube End Seal	X	X	
6	Cap Tube End Seal	X	X	
7	Cap			
8	Rod			X
9	Piston			X
10	Piston Seal	X	X	
11	Tube			
12	Piston/Rod Assembly Locking Nut			X
13	Socket Head Cap Screws (SHCS)			



Repair Kit Installation Instructions

1. Loosen 4 Socket Head Cap Screws or 4 Sleeve Nuts (Part #13) to remove Head (Part #1) or Cap (Part #7).
2. Remove Head and Cap to access Piston/Rod Assembly (Part #8 & #9)
3. Carefully remove seals. (Part #5, #6, and #10) Any damage to the seal grooves may result in leakage.
4. Lubricate all seals with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
5. Install Quad Piston Seal (Part #10). Make sure the piston seal is not twisted inside groove.
6. Sink piston/rod assembly into sinker tube.
7. Apply lube inside the cylinder tube (Part #11).
8. Sink piston/rod assembly into cylinder tube.
9. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
10. Place Tube End Seals (Part #6) into head and cap seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
11. Lightly grease Rod Seal (Part #3) in supplied loaded head assembly. This will ease the installation of the loaded head over the rod.
12. Reassembly cylinder. Loosely torque 4 Socket Head Cap Screws or 4 Sleeve Nuts to allow head and cap to rotate slightly.
13. Before final torque, place cylinder on level surface. This will ensure that the cylinder head and cap are square. Torque Socket Head Cap Screws or Sleeve Nuts in a crisscross pattern. Use the following charts for torque tolerances for Socket Head Cap Screws or Sleeve Nuts.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 12-14.
See Seal Installation Guide on page 30 for additional (visual) instructions.

Seal Kit Installation Instructions


1. Loosen 4 Socket Head Cap Screws or 4 Sleeve Nuts (Part #13) to remove Head (Part #1) or Cap (Part #7).
2. Remove Head and Cap to access Piston/Rod Assembly (Part #8 & #9)
3. Carefully remove seals. (Part #2, #3, #5, #6, and #10) Any damage to the seal grooves may result in leakage.
4. Lubricate all seals with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
5. Install Quad Piston Seal (Part #10). Make sure the piston seal is not twisted inside groove.
6. Sink piston/rod assembly into sinker tube.
7. Apply lube inside the cylinder tube (Part #11).
8. Sink piston/rod assembly into cylinder tube.
9. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
10. Place Tube End Seals (Part #6) into head and cap seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
11. Install Backup Ring (Part #2) and Rod Seal (Part #3) into head. After installation, lightly grease Rod Seal. This will ease the installation of the loaded head over the rod.
12. Reassembly cylinder. Loosely torque 4 Socket Head Cap Screws or 4 Sleeve Nuts to allow head and cap to rotate slightly.
13. Before final torque, place cylinder on level surface. This will ensure that the cylinder head and cap are square. Torque Socket Head Cap Screws or Sleeve Nuts in a crisscross pattern. Use the following charts for torque tolerances for Socket Head Cap Screws or Sleeve Nuts.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 12-14.
See Seal Installation Guide on page 30 for additional (visual) instructions.



C Series Rugged Compact

NUMATICS®

Seal Installation Guide

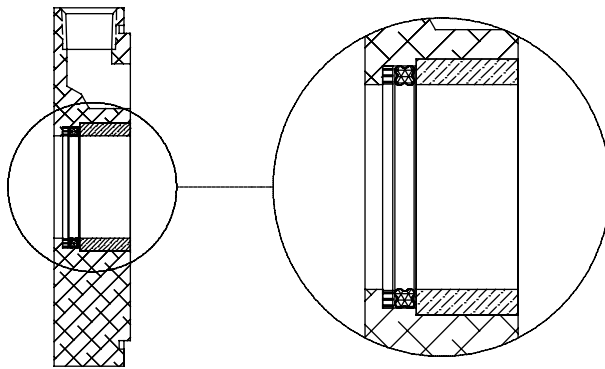

Loaded Head



Piston

Screw/Sleeve Nut Torque Tolerances (lbs-ft) Part #13

Bore	Min.	Max.
3/4"	1	1.5
1-1/8"	5	6
1-1/2"	15	20
2"	15	20
2-1/2"	15	20
3"	25	30
4"	45	50

Sinker Tube Part Numbers

Bore	Part #
3/4"	C06-C91
1-1/8"	C06-G91
1-1/2"	A06-K91
2"	A06-L91
2-1/2"	A06-M91
3"	C06-N91
4"	A06-R91

Note: Sinker Tubes are not included in kits. They can be ordered using the part numbers from the provided chart.

NUMATICS®

World Class Supplier
of Pneumatic Components



World Headquarters

Numatics Incorporated

Phone: 248-887-4111
Fax: 248-887-9190

UNITED STATES

Numatics – Air Preparation

Phone: 810-667-3900
Fax: 810-667-3902

Numatics – Valves

Phone: 248-887-4111
Fax: 248-887-9190

Numatics – Miniature Valves

Phone: 248-960-1400
Fax: 248-960-2160

Numatics – Cylinders

Phone: 615-771-1200
Fax: 615-771-1201

Numatics – Rodless Cylinders

Phone: 519-452-1777
Fax: 519-452-3995

Numatics – Automation

Phone: 440-934-3200
Fax: 440-934-2288

CANADA

Ontario

Numatics, Ltd.
Phone: 519-452-1777
Fax: 519-452-3995

Quebec

Numatics, Ltd.
Phone: 514-332-6444
Fax: 514-332-9273

British Columbia

Numatics, Ltd.
Phone: 604-574-0401
Fax: 604-574-3713

EUROPE

Germany – European Headquarters

Numatics GmbH
Phone: 011-49-22 41-31 60-0
Fax: 011-49-22 41-31 60 40

Hungary

Numatics Kft.
Phone: 011-36-13 82 21 35
Fax: 011-36-12 04 39 47

EUROPE

England

Numatics Limited
Phone: 011-44-1525-37 07 35
Fax: 011-44-1525-38 25 67

France

Numatics s.a.r.l.
Phone: 011-33-1 41 21 48 88
Fax: 011-33-1 41 21 48 89

Italy

Numatics srl
Phone: 011-39-030-373 19 99
Fax: 011-39-030-373 19 81

Netherlands

Numatics B.V.
Phone: 011-31-418-65 29 50
Fax: 011-31-418-65 29 43

Spain

Numatics Spain S.L.
Phone: 011-34-93-221 21 96
Fax: 011-34-93-221 35 14

AFRICA

South Africa

Numatics SA (Pty) Ltd.
Phone: 011-27-11-8 65 44 52
Fax: 011-27-11-8 65 42 90

LATIN & SOUTH AMERICA

Mexico

Numatics de Mexico S.A. de C.V.
Phone: 011-52-222-284 6176
Fax: 011-52-222-284 6179

Brazil

Valvair Comercial Ltda.
Phone: 011-55-12-351 2874
Fax: 011-55-12-351 1958

ASIA & PACIFIC

Australia

Numatics Australia Pty. Ltd.
Phone: 011-61-3-95 63 86 00
Fax: 011-61-3-95 63 85 11

Taiwan – Asian Headquarters

Numatics Co, Ltd. Asia
Phone: 011-886-2-29 15 16 05
Fax: 011-886-2-29 14 18 97

For a comprehensive listing of all Numatics production and distribution facilities worldwide, visit www.numatics.com