

VRX VANE ROTARY ACTUATOR

ENDURANCE TECHNOLOGY™



Corrosion Resistant External Components

MAXIMUM DURABILITY

WHAT YOU EXPECT FROM THE PNEUMATIC ACTUATOR LEADER:



Tolomatic offers a complete line of linear motion products. We offer more rodless cylinder styles than any other company. Rod style and vane rotary actuators complement our broad line of rodless pneumatic products.

● INNOVATIVE RODLESS PRODUCTS

Tolomatic created the rodless cylinder industry when we manufactured the original cable cylinder. We continually add innovative products to our portfolio, offering industry leading pneumatic rodless products. For over 50 years, Tolomatic has been recognized as the rodless cylinder market leader. We earn that distinction daily by satisfying customers like you.

● ENDURANCE TECHNOLOGYSM

Every Tolomatic pneumatic product is designed and built with Endurance TechnologySM. Material selection, from seals to finish, and every other design element is optimized for long life and excellent performance. The result is the best value and best performing pneumatic product in the market today. As one customer recently told us, "Your cylinders are built like a tank and run like a deer." Thank you!



● TRUST YOUR APPLICATION TO THE PNEUMATIC ACTUATOR LEADER

When you want the job done right, go with the experts. Long life. Durability. Ruggedness. Built to your specifications in 5 days or less. Turn to Tolomatic for you motion needs.

Be sure to visit www.tolomatic.com for up-to-date product specifications, free sizing and selection software, and 3D CAD solid files.

APPLICATIONS

With over 50 years of proven application experience, Tolomatic pneumatic products are key components in the following industries and applications:

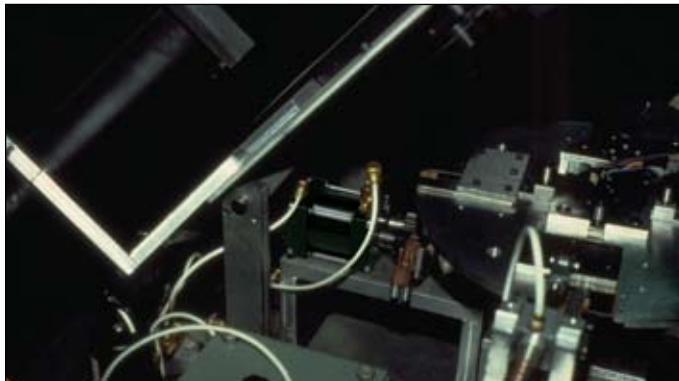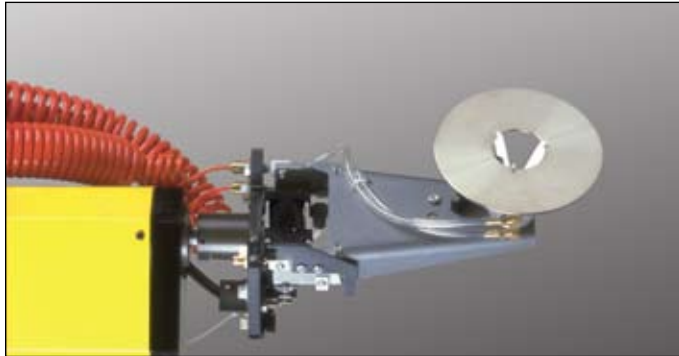

INDUSTRY INSTALLATIONS

- Packaging
- Automotive
- Food and Beverage
- Material Handling & Conveying
- Plastic Injection Molding
- Metal Processing
- Paper and Textiles
- Medical
- Electronics
- Printing
- Many others

APPLICATIONS

- Material Handling
- Part Transfer
- Parts Feeding
- Pick and Place
- Cutting
- Shutter Motion
- Part Clamping
- Many others

TABLE OF CONTENTS

Applications.....	3
VRX Vane Rotary Actuator.....	4
Torque vs. Pressure.....	6
Dimensions	
1810	7
1817	8
1825	9
Selection	10
Specifications	11
Other Tolomatic Products.....	12

VRX VANE ROTARY ACTUATOR

ENDURANCE TECHNOLOGYSM

Endurance Technology features are designed for maximum durability to provide extended service life.

CR

CORROSION RESISTANT

- All exterior components are either stainless steel or anodized aluminum for corrosion resistance

SHAFT BEARING

- High load capacity radial ball bearing for precision motion throughout actuator life


AXIAL BEARING LOAD CAPACITY

Model	Axial Bearing Load Capacity
VRA	Low
VRX	High

CR

CORROSION RESISTANT SHAFT

- Corrosion resistance for demanding applications

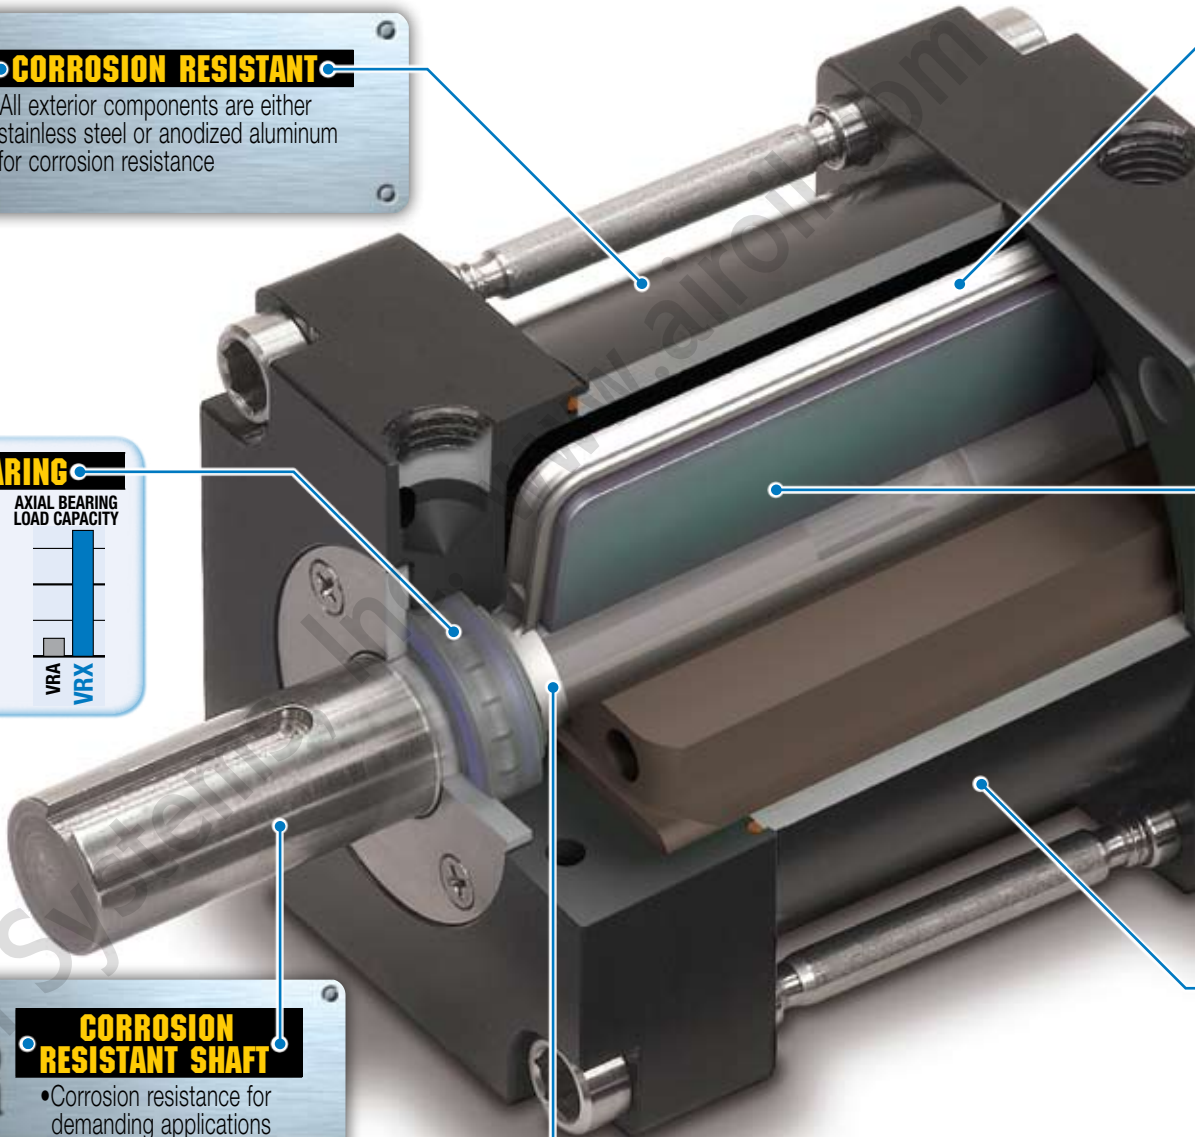

HSN SHAFT SEAL

- Highly saturated nitrile, self-lubricated seal
- Multiple lobe construction for leak-free operation and greater reliability

VRX

MODEL SIZES



MAXIMUM

TORQUE: 484 in-lbs

ROTATION: 280°

COMPLETE
INFORMATION:
www.tolomatic.com




TOLOMATIC... MAXIMUM DURABILITY

HIGHLY SATURATED NITRILE

- Self-lubricated HSN (Highly Saturated Nitrile) seal material provides 3-5X service life of Buna-N
- High strength compound provides superior wear resistance

HIGH TORQUE VANES

- Large vanes provide significantly higher torque density than competitive models
- Stamped steel vane is permanently bonded to machined grooves on shaft
- Double lip vane seal molded directly onto rotor provides a tight seal with low breakaway



ANODIZED ALUMINUM

- Body and machined heads are anodized to ensure long seal life and low breakaway pressure

FLEXIBLE MOUNTING

- Compatible with legacy Tolomatic vane rotary actuators (VRA)
- New direct mounting often replaces the need for optional front flange in new installations

ONE MOVING PART

- Zero backlash
- Smooth rotation
- Precise repeatability
- Continuous full torque throughout rotation

OPTIONS



SINGLE OR DUAL VANES

- 280° or 100° rotation



SINGLE OR DUAL SHAFTS

- Additional output option



ADJUSTABLE STOP

- For rotational stops between 0° to 280°
- Available for 17 and 25 sizes only




FRONT FLANGE MOUNT


- Additional mounting option
- Drop in replacement for legacy Tolomatic vane rotary actuators (VRA)

TORQUE vs. PRESSURE


100° ROTATION (DOUBLE VANE)

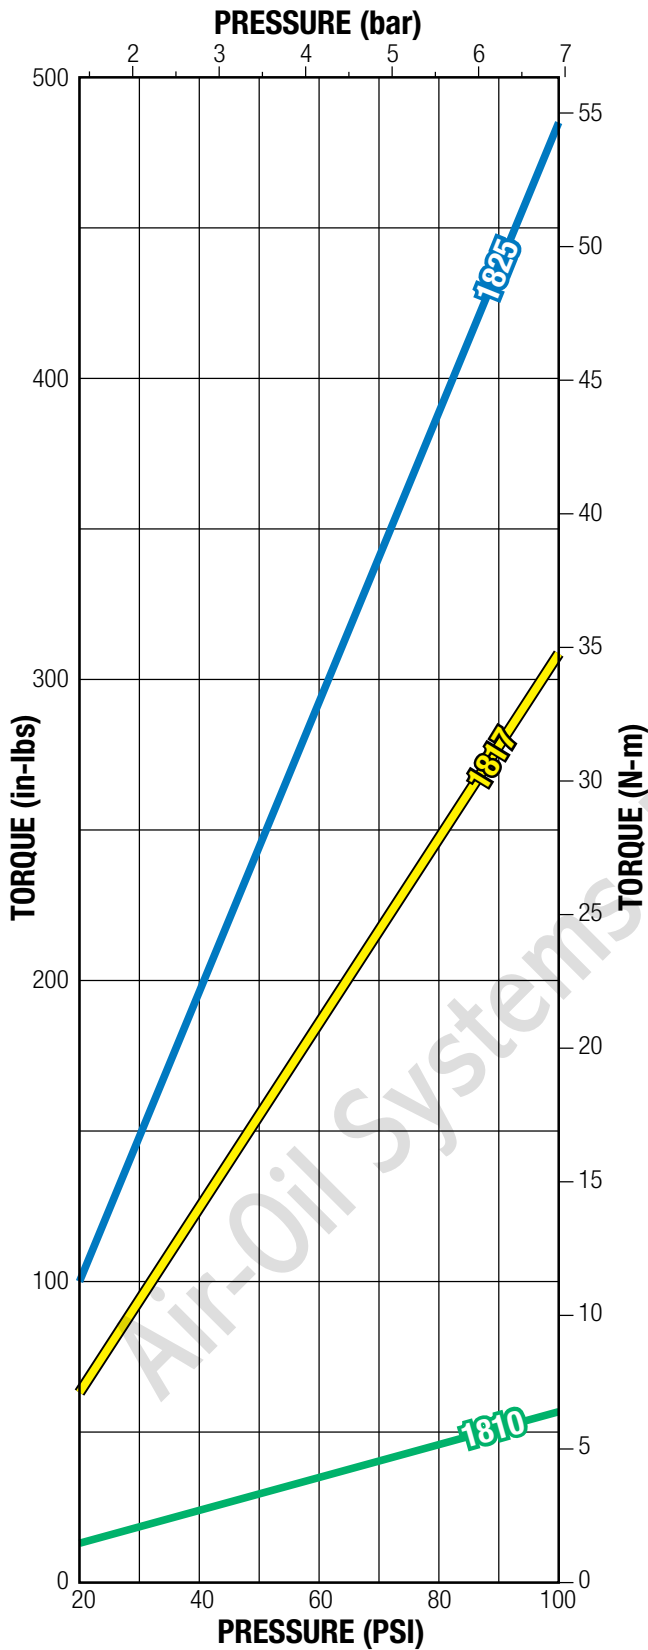


280° ROTATION (SINGLE VANE)

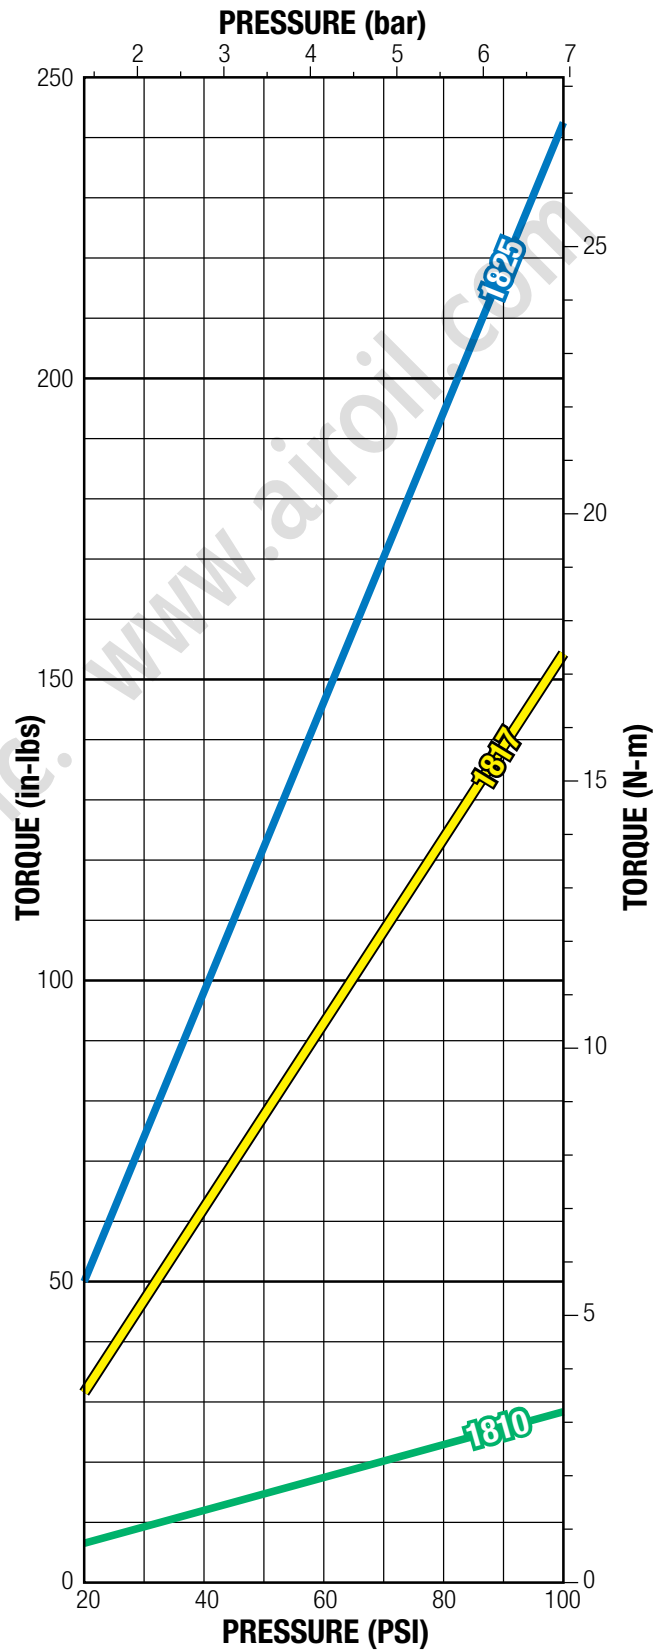


DIMENSIONS: 1810 - 1" BORE

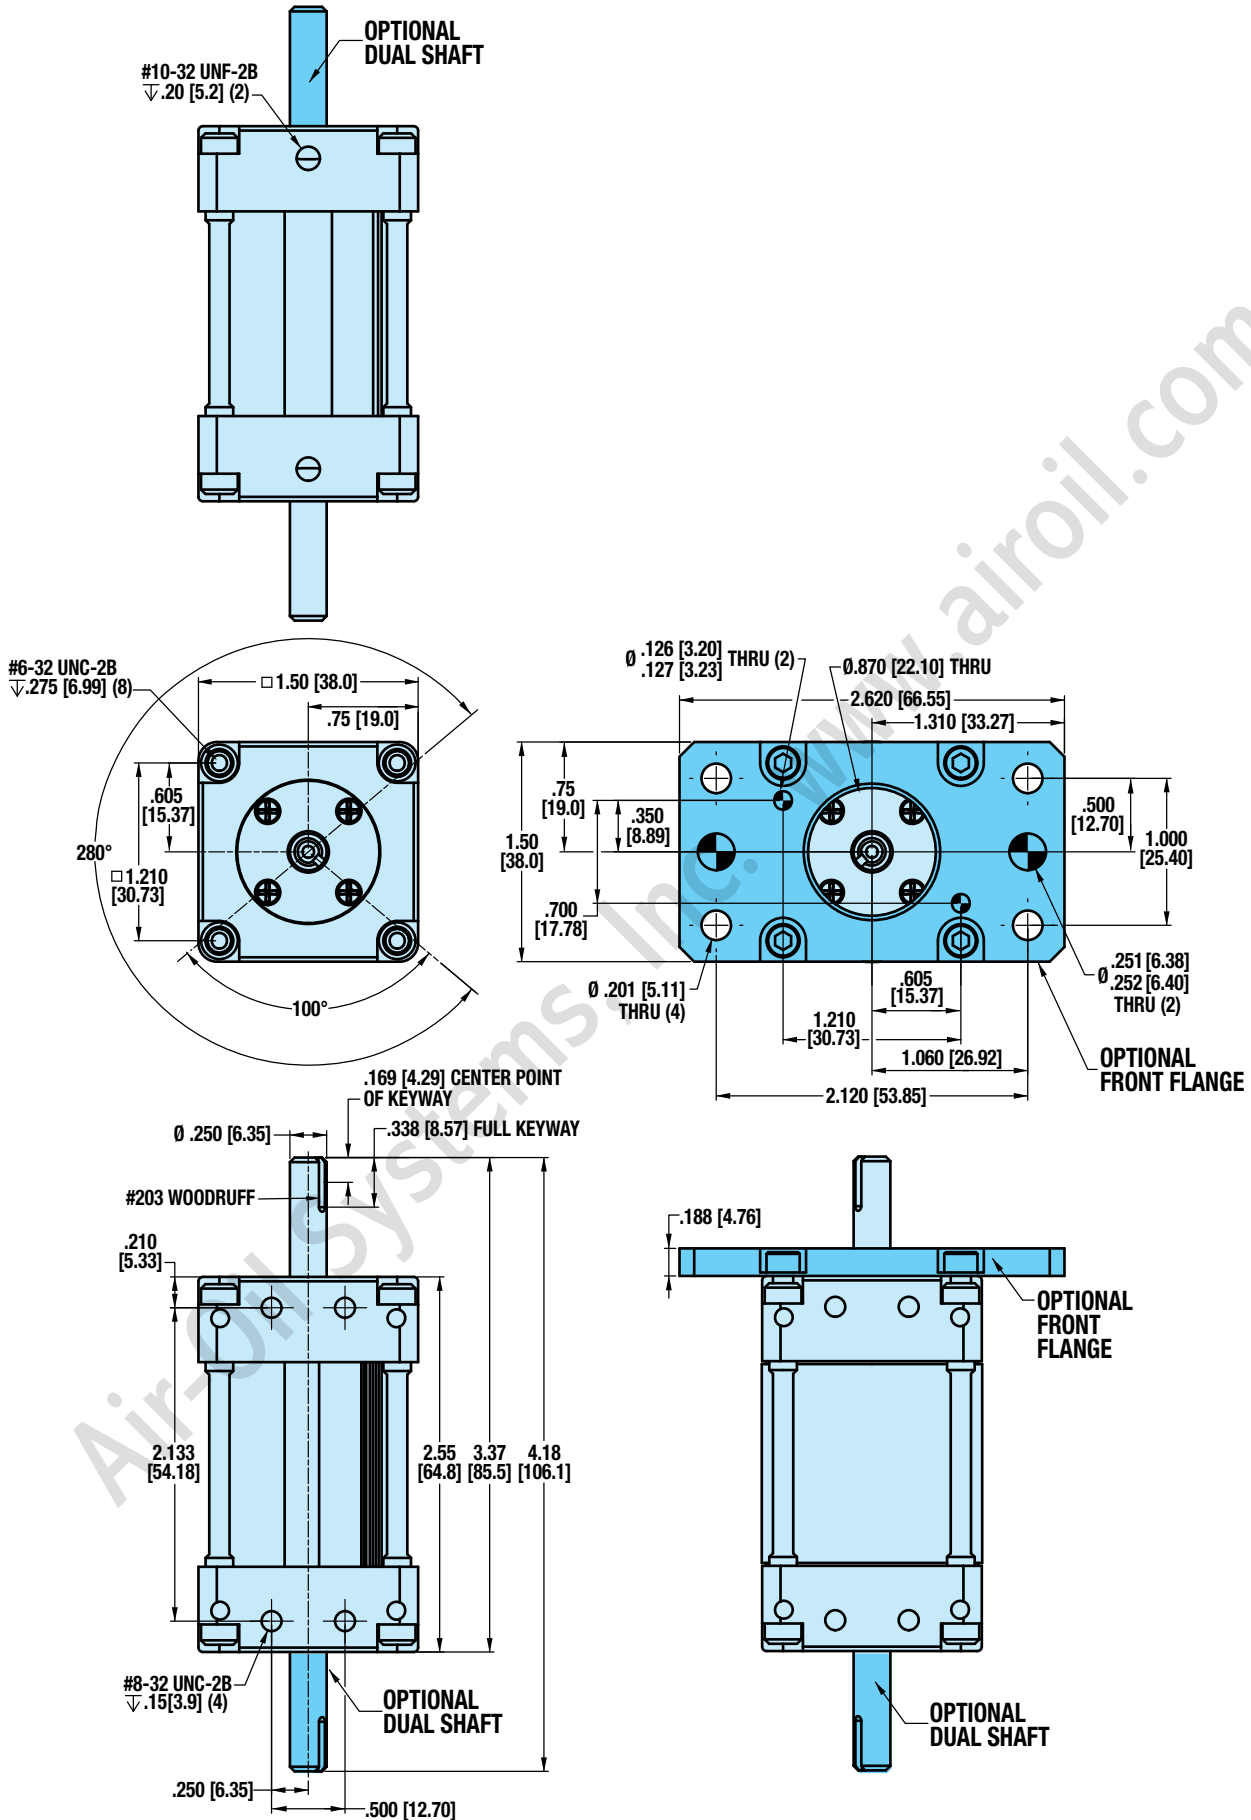

DIMENSIONS: 1817 - 1.75" BORE

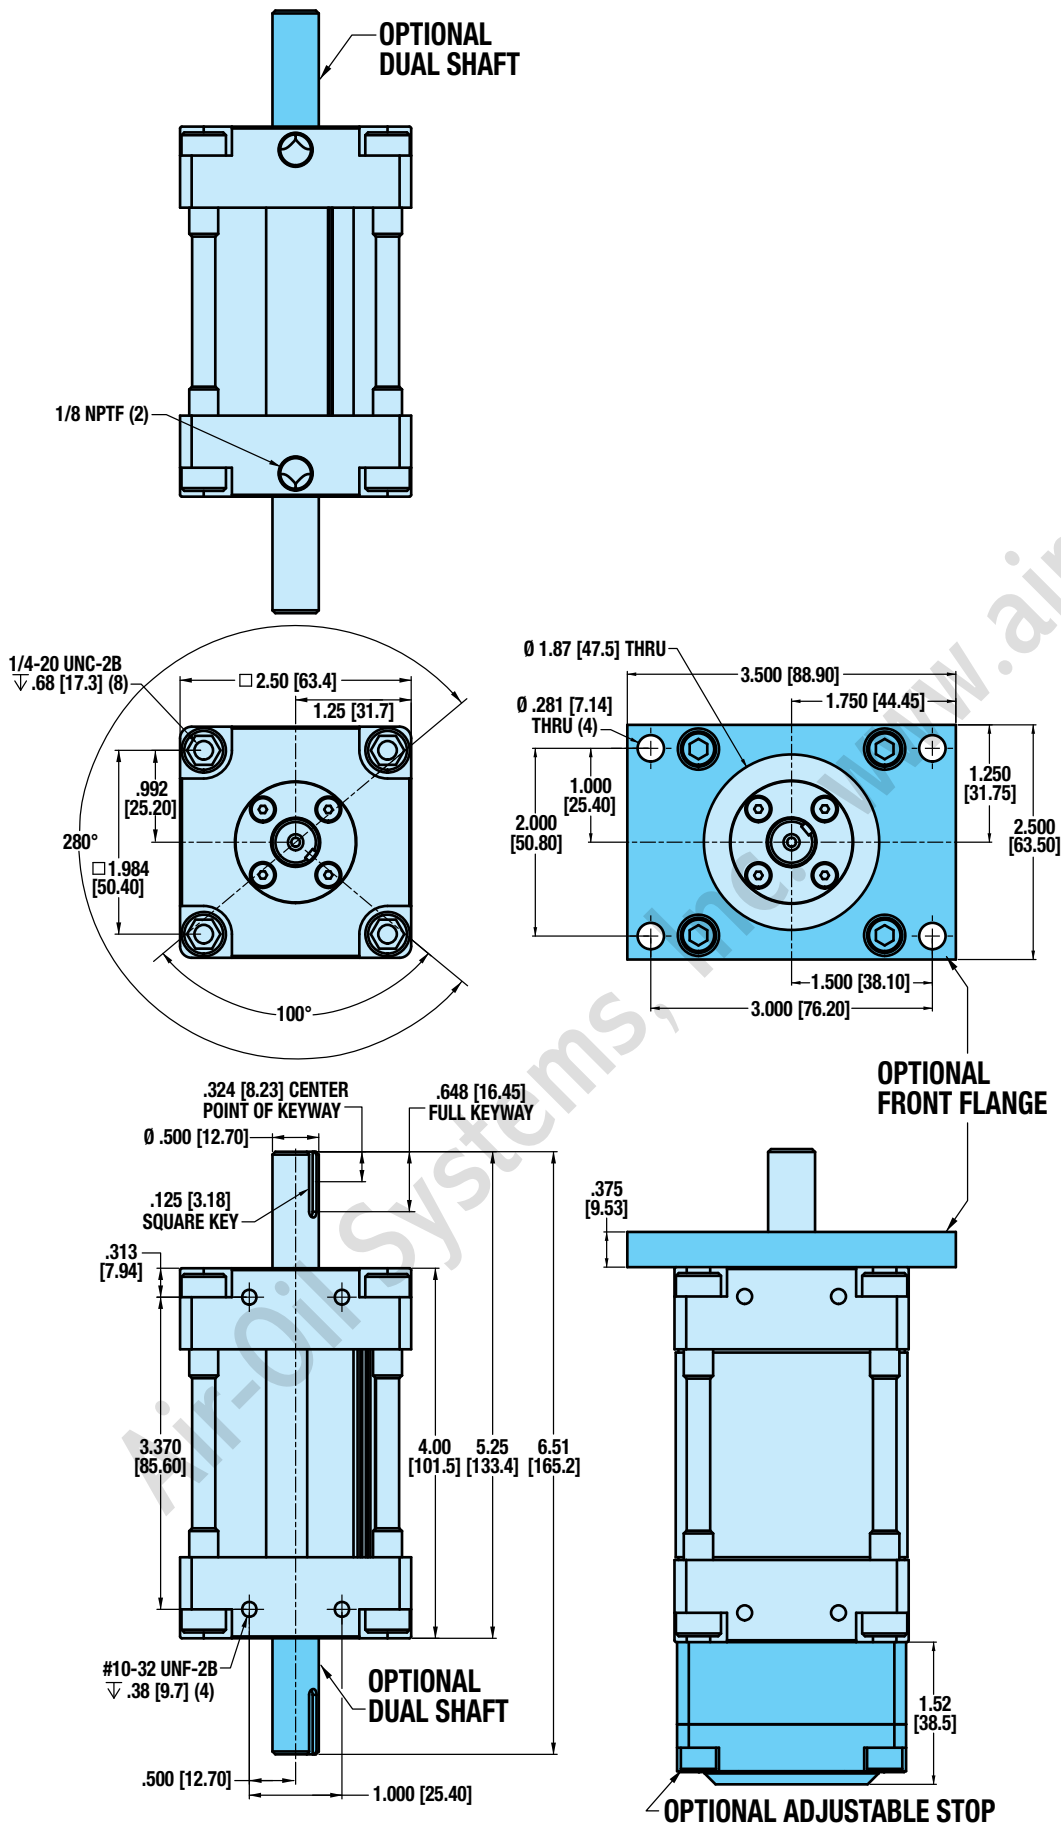

DIMENSIONS: 1825 - 2.5" BORE

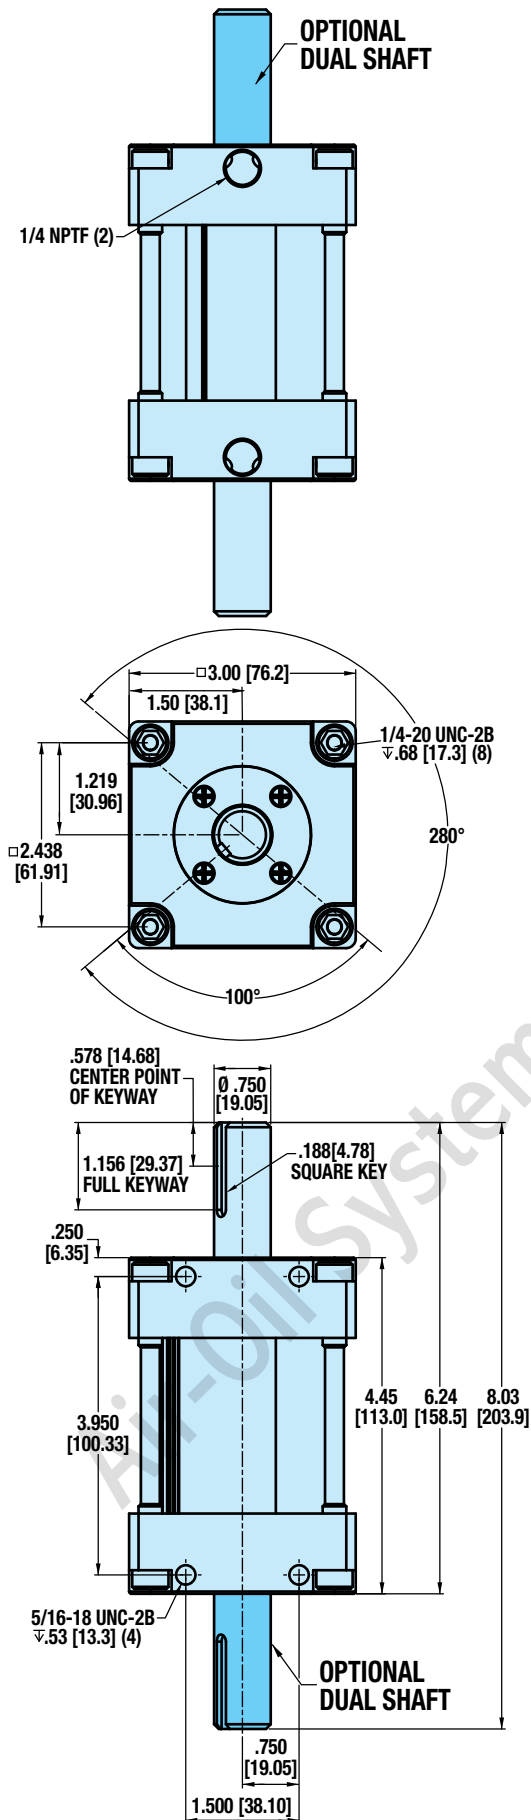

APPLICATION TIP:

For pneumatic applications metering-out is generally the preferred method of flow control. This allows the air to build a stabilizing pressure at full flow, which may improve smoothness of operation. However, because of the cavity volume vs. the actual travel involved in a vane rotary device, speed control functions may perform better using a meter-in method for vane rotary actuators. Testing speed control methods in the application will indicate the most reliable means of speed control.

A whitepaper from the International Fluid Power Society dealing with many pneumatic accessories and controls can be found at:

<http://www.ifps.org/Education/WhitePapers/PneumaticAccessories.htm>

SELECTION GUIDELINES

To select a vane rotary actuator, the following application data is required:

- Torque required to rotate the load
- Degree of rotation
- Pressure available (PSI)
- Radial and/or axial loads

1. DETERMINE TORQUE OUTPUT AT AVAILABLE PRESSURE

Refer to the Torque vs. Pressure graph and choose a rotary actuator based on its torque output at the available operating pressure that will rotate the load.

2. DETERMINE ACTUATOR'S BEARING LOAD CAPACITY

Consult the Bearing Load Capacity table. Bearing loads must not exceed the values shown for radial and/or axial loading.

3. CALCULATE KINETIC ENERGY IF APPLICABLE

Kinetic energy comes into play if the actuator will decelerate the load. In these applications, both torque output to rotate the load and kinetic energy absorption to stop the load must be considered to correctly size a rotary actuator.

KINETIC ENERGY BASIC FORMULA

$$KE = \frac{1}{2} J_m \omega^2$$

$$\omega = 0.035 \times \frac{\text{angle traveled (deg.)}}{\text{rotation time (sec.)}}$$

where

KE = Kinetic Energy per stop (in.- lbs.)










J_m = Rotational mass moment of inertia (in.- lbs.- sec.²)

ω = Peak Velocity (rad. / sec.)
(assuming twice average velocity)

W = Weight of load (lbs.)

g = Gravitational constant =
386.4 in. / sec.²

MOMENT OF INERTIA EXAMPLES

<p>SOLID SPHERE Mounted on center</p>  $J_m = \frac{2}{5} \times \frac{W}{g} \times r^2$	<p>THIN DISK Mounted on center</p>  $J_m = \frac{W}{g} \times \frac{r^2}{2}$	<p>THIN DISK End mounted on center</p>  $J_m = \frac{W}{g} \times \frac{r^2}{4}$	<p>SLENDER ROD Mounted on center</p>  $J_m = \frac{W}{g} \times \frac{L^2}{12}$	<p>SLENDER ROD Mounted off center</p>  $J_m = \left(\frac{W_1}{g} \times \frac{a^2}{3} \right) + \left(\frac{W_2}{g} \times \frac{b^2}{3} \right)$
<p>THIN RECTANGULAR PLATE End mounted on center</p>  $J_m = \frac{W}{g} \times \frac{a^2}{12}$	<p>THIN RECTANGULAR PLATE Mounted on center</p>  $J_m = \frac{W}{g} \times \frac{a^2 + b^2}{12}$	<p>THIN RECTANGULAR PLATE Mounted off center</p>  $J_m = \left(\frac{W_1}{g} \times \frac{4a^2 + c^2}{12} \right) + \left(\frac{W_2}{g} \times \frac{4b^2 + c^2}{12} \right)$	<p>POINT LOAD</p>  $J_m = \frac{W}{g} \times L^2$	

SPECIFICATIONS

	MODEL	1810	1817	1825
	BORE	1"	1.75"	2.5"
WEIGHT	lb	0.4	2.0	3.2
	kg	0.2	0.9	1.5

MAXIMUM OPERATING PRESSURE 100 PSI (6.9 BAR)


OPERATING TEMPERATURE 0 to 125 °F (-18 to 52 °C)

MAXIMUM TORQUE CAPACITY (AT 100 PSI)

	MODEL	1810	1817	1825
	BORE	1"	1.75"	2.5"
100° ROTATION	in-lbs	56	308	484
	N-m	6.3	34.8	54.7
280° ROTATION	in-lbs	28	154	242
	N-m	3.2	17.3	27.3

ORDERING

MODEL NUMBER	BORE SIZE	ROTATION	VANE / STATOR	SHAFT	OPTION
1810-0113	1"	280°	Single	Single	
1810-0112	1"	280°	Single	Dual	
1810-0111	1"	100°	Dual	Single	
1810-0110	1"	100°	Dual	Dual	
1810-0119	1"	280°	Single	Single	Front Flange Mount
1810-0118	1"	280°	Single	Dual	Front Flange Mount
1810-0117	1"	100°	Dual	Single	Front Flange Mount
1810-0116	1"	100°	Dual	Dual	Front Flange Mount
1817-0113	1.75"	280°	Single	Single	
1817-0112	1.75"	280°	Single	Dual	
1817-0111	1.75"	100°	Dual	Single	
1817-0110	1.75"	100°	Dual	Dual	
1817-0119	1.75"	280°	Single	Single	Front Flange Mount
1817-0118	1.75"	280°	Single	Dual	Front Flange Mount
1817-0117	1.75"	100°	Dual	Single	Front Flange Mount
1817-0116	1.75"	100°	Dual	Dual	Front Flange Mount
1817-0115	1.75"	280°	Single	Single	Adjustable Stops
1817-0120	1.75"	280°	Single	Single	Front Flange Mount, Adjustable Stops
1817-0114	1.75"	100°	Dual	Single	Adjustable Stops
1817-0121	1.75"	100°	Dual	Single	Front Flange Mount, Adjustable Stops
1825-0113	2.5"	280°	Single	Single	
1825-0112	2.5"	280°	Single	Single	
1825-0111	2.5"	100°	Dual	Single	
1825-0110	2.5"	100°	Dual	Single	
1825-0115	2.5"	280°	Single	Single	Adjustable Stops
1825-0114	2.5"	100°	Dual	Single	Adjustable Stops

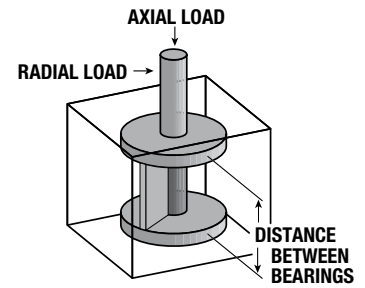

BEARING LOAD CAPACITY

	MODEL	1810	1817	1825
	BORE	1"	1.75"	2.5"
RADIAL LOAD	lbf	19.5	36	59
	N	87	160	262
AXIAL LOAD	lbf	8	17.5	23
	N	36	78	102

KINETIC ENERGY RATINGS

	in-lb	0.15	0.35	0.70
KINETIC ENERGY ABSORPTION / STOP	N-m	0.02	0.04	0.08

OPTION NOTES:

DUAL SHAFT

Available on all VRX sizes

FRONT FLANGE MOUNT

Available on 1810 and 1817 (1.00" and 1.75" bore)

ADJUSTABLE STOPS

Available on 1817 and 1825 (1.75" and 2.50" bore)

THE TOLOMATIC DIFFERENCE What you expect from the industry leader:



EXCELLENT CUSTOMER SERVICE & TECHNICAL SUPPORT

Our people make the difference! Expect prompt, courteous replies to all of your application and product questions.



INDUSTRY LEADING DELIVERIES

Standard catalog products are built to order and ready-to-ship in 5 days or less. Modified and custom products ship weeks ahead of the competition.



INNOVATIVE PRODUCTS

From standard catalog products... to modified products... to completely unique custom products, Tolomatic designs and builds the best solutions for your challenging applications.



SIZING & SELECTION SOFTWARE

Windows® compatible, downloadable from our website – FREE – the best tool of its kind on the market! Product selection has never been easier.



3D MODELS & 2D DRAWINGS AVAILABLE ON THE WEB

Easy to access CAD files are available in many popular formats.

ALSO CONSIDER THESE OTHER TOLOMATIC PRODUCTS:

PNEUMATIC PRODUCTS



RODLESS CYLINDERS: *Band Cylinders, Cable Cylinders, MAGNETICALLY COUPLED CYLINDERS/SLIDES; GUIDED ROD CYLINDER SLIDES; ROTARY ACTUATORS*
"FOLDOUT" BROCHURE #9900-9075 MXP BROCHURE #8100-4000 BAND CYLINDER BROCHURE #9900-4015 www.tolomatic.com/pneumatic

ELECTRIC PRODUCTS



ROD & GUIDED ROD STYLE ACTUATORS, HIGH THRUST ACTUATORS, SCREW & BELT DRIVE RODLESS ACTUATORS, MOTORS, AXIOM DRIVES/CONTROLLERS
"FOLDOUT" BROCHURE #9900-9074 PRODUCTS BROCHURE #9900-4016 MXE BROCHURE #8300-4000 STEPPER PRODUCTS #3600-4160 www.tolomatic.com/electric

POWER TRANSMISSION PRODUCTS



GEARBOXES: *Float-A-Shaft®, Slide-Rite®, DISC CONE CLUTCH; CALIPER DISC BRAKE*
"FOLDOUT" BROCHURE #9900-9076 SLIDE-RITE® GEARBOX BROCHURE #0100-4006 SLIDE-RITE® CROSS REF. #0100-4005 CATALOG #9900-4009 www.tolomatic.com/pt



3800 County Road 116 • Hamel, MN 55340 U.S.A.
Phone: (763) 478-8000 • Fax: (763) 478-8080

Toll-Free: **1-800-328-2174**

Email: help@tolomatic.com • <http://www.tolomatic.com>

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit www.tolomatic.com for the most up-to-date technical information

