



Models 73 and 74

The GO Switch Model 73 is our most popular leverless limit switch. Its solid stainless steel construction and global certifications make it the ideal choice for a variety of applications. Model 74 is the same, less the conduit hub.

Features:

- SPDT 4A contacts
- Intrinsically Safe
- 40° to 221°F operating temperature

Options:

- Suitable for Zone 0, 1, or 2 explosion proof
- 40° to 400°F high temperature
- Quick disconnect connector
- Underwater capabilities
- English or Metric threads

FAST TRACK DELIVERY

73-13523-A2
Class I Div 1, 3 ft. leads

73-13524-A2
Class I Div 1, 3 ft. leads

73-13526-A2
Class I Div 2, 3 ft. leads



73-13528-A2
General Purpose 3 ft. leads

73-13528-DCA
General Purpose, Mini Connector

74-13528-B2
General Purpose, 3 ft. cable

74-13528-DBA
General Purpose, Micro Connector

Dimensions

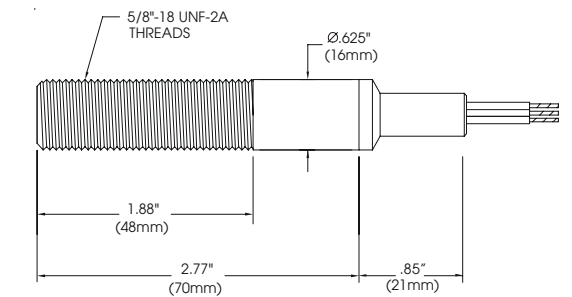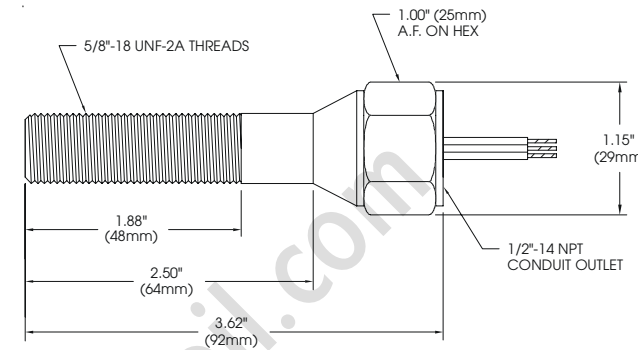

Model 73

Model 74

Model	Contact Form	Sensing Range	Outlet Position	Enclosure Material	Approvals	Wiring Options																																																				
<p>Repeatability: .002" (.05mm) typical</p> <p>Response Time: 8 milliseconds</p> <p>Differential: Approx. .020" (.51 mm)</p> <p>Operating Temperature: -40° to 221°F (-40° to 105°C). HiTemp to 400°F (204°C)</p> <p>73 Model 73 5/8" (16 mm) dia. x 3 5/8" (92 mm) long with 5/8"-18 UNF x 1 7/8" (48 mm) threads and 1/2" NPT conduit hub</p> <p>73M Model 73 M18 x 1 external metric thread</p> <p>74 Model 74 5/8" (16 mm) dia. x 2 3/4" (70 mm) long with 5/8"-18 UNF x 1 7/8" (48 mm) threads. No conduit hub</p> <p>74M Model 74 M18 x 1 external metric thread</p>	<p>Contact Material: Palladium silver with sawtooth surface configuration</p> <p>Form: SPDT, Form C</p> <p>Ratings: Resistive</p> <table border="1"> <thead> <tr> <th colspan="2">AC</th> <th colspan="2">DC</th> </tr> <tr> <th>Volts</th> <th>Amps</th> <th>Volts</th> <th>Amps</th> </tr> </thead> <tbody> <tr> <td>120</td> <td>4</td> <td>24</td> <td>3</td> </tr> <tr> <td>240</td> <td>2</td> <td>48</td> <td>1.25</td> </tr> <tr> <td></td> <td></td> <td>125</td> <td>0.5</td> </tr> <tr> <td></td> <td></td> <td>250</td> <td>0.5</td> </tr> </tbody> </table> <p>1 Single Pole Double Throw (Form C)</p> <p>Form C - SPDT</p>	AC		DC		Volts	Amps	Volts	Amps	120	4	24	3	240	2	48	1.25			125	0.5			250	0.5	<p>Target Material: Ferrous steel</p> <p>Sensing Range: Approx. .100" (3 mm) end sensing (2,000 PSI) .072" (2 mm) end sensing (5,000 PSI) .060" (1.5 mm) end sensing (10,000 PSI)</p> <p>Sensing Range with Target Magnet: up to .35" (9 mm)</p> <p>3 Standard sensing - approx. .100" (3 mm) end sensing (Enclosure must be 2 or 6)</p> <p>4 HiPressure sensing - approx. .072" (2 mm) end sensing (Enclosure must be 3 and Approvals must be 2, 7, 8, or 9)</p> <p>5 HiPressure sensing - approx. .060" (1.5 mm) end sensing (Enclosure must be 4 and Approvals must be 2, 7, 8 or 9)</p> <p>Extended Sensing Range with External Target Magnets (See Accessories for External Target Magnets)</p> <table border="1"> <thead> <tr> <th>Magnet</th> <th>Sensing</th> <th>Differential</th> </tr> </thead> <tbody> <tr> <td>AMP3</td> <td>.20"</td> <td>.25"</td> </tr> <tr> <td>AMS4</td> <td>.35"</td> <td>.15"</td> </tr> <tr> <td>AMS7</td> <td>.20"</td> <td>.05"</td> </tr> </tbody> </table>	Magnet	Sensing	Differential	AMP3	.20"	.25"	AMS4	.35"	.15"	AMS7	.20"	.05"	<p>Conduit Outlet: 1/2" NPT</p> <p>2 Side entry with Teflon insulated leads (Model 74) (Approval must be 2 or 8) (Wiring must be F)</p> <p>5 Bottom of enclosure</p>	<p>2 303 stainless steel (rated 2,000 PSI) (Sensing must be 3)</p> <p>3 HiPressure - 303 stainless steel (rated 5,000 PSI) (Sensing must be 4) (Approval must be 2, 7, 8, or 9)</p> <p>4 HiPressure - 303 stainless steel (rated 10,000 PSI) (Sensing must be 5) (Approval must be 2, 7, 8, or 9)</p> <p>6 316 stainless steel (rated 2,000 PSI)</p> <p>7 303 stainless steel (rated 3,500 PSI) (Approval must be 3)</p>	<p>UL SP BASEEFA</p> <p>2 High temperature to 400°F (204°C) with Teflon™ insulated leads (Wiring must be F)</p> <p>3 UL listed explosion proof for CI I, Div 1 & 2; Grps A,B,C,D; CI II, Div 1 & 2, Grps E-G; CI III (Model 73) (Wiring must be A, B, or F) (Lead seal req'd within 18")</p> <p>4 CSA certified explosion proof for CI I Div 1 & 2; Grps A,B,C,D; CI II, Div 1; Grps E-G; CI III (Model 73) (Wiring must be A, B, or F) (Lead seal req'd within 18")</p> <p>6 CSA certified CI I, Div 2; Grps A,B,C,D; CI II, Div 2; Grps E-G; CI III (Model 73) (Wiring must be A, B, or F) (Lead seal req'd within 18")</p> <p>7 CSA certified General Purpose</p> <p>8 UL listed General Purpose</p> <p>9 CENELEC: EExd IIC T6 Zone 1. (Model 73) (Wiring must be A or B)</p> <p>T ATEX Zone 1 EEx d IIC T6 (-20 to +50C), II 2G (Model 73 only) (For Hi Temp to +150 use Wiring H)</p>	<p>Lead Wires 18 Gauge (.110" dia) potted-in PVC insulated AWM / TEW stranded lead wires, rated at 221°F (105°C) 600V UL / CSA listed</p> <p>A2 36" (914 mm)</p> <p>A3 72" (1829 mm)</p> <p>A4 144" (3658 mm)</p> <p>A___ Lengths greater than 144" (Specify length in 5' increments (e.g. A150 = 150 ft. of leads))</p> <p>Cable 18 Gauge (.250" dia.) potted-in PVC cable, rated at 176°F (80°C) 300V, UL / CSA listed</p> <p>B2 36" (914 mm)</p> <p>B3 72" (1829 mm)</p> <p>B4 144" (3658 mm)</p> <p>B___ Lengths greater than 144" (Specify length in 5' increments (e.g. B150 = 150 ft. of cable))</p> <p>Water Resistant 18 Gauge (3 cond. .250" dia; 4 cond. .450" dia) PVC cable rated at 176°F (80°C) 300V with water-resistant squeeze connector. (Model 74)</p> <p>C2 36" (914 mm)</p> <p>C3 72" (1829 mm)</p> <p>C4 144" (3658 mm)</p> <p>C___ Lengths greater than 144" (Specify length in feet (e.g. C150 = 150 ft. of cable))</p> <p>Quick Disconnect Male Quick Disconnect only, potted-in connector. (CSA requires a case ground) (Approvals must be 7 or 8)</p> <table border="1"> <thead> <tr> <th colspan="2">Mini-change®</th> <th colspan="2">Micro-change®</th> </tr> </thead> <tbody> <tr> <td>DCA 3 - pin Mini-change® type</td> <td>DBA 3 - pin Micro-change® type</td> <td>DCD 4 - pin Mini-change® type</td> <td>DBD 4 - pin Micro-change® type</td> </tr> <tr> <td>DCG 5 - pin Mini-change® type</td> <td>DBG 5 - pin Micro-change® type</td> <td colspan="2">SubSea Underwater Connector (Model 73) (Certified not to leak)</td> </tr> <tr> <td>3DD 3 pin</td> <td>3DE 3 pin right-angle</td> <td>4DD 4 pin</td> <td>4DE 4 pin right-angle</td> </tr> </tbody> </table> <p>HiTemp Leads 18 gauge (.070" dia. potted-in Teflon™ insulated leads rated at 482°F (250°C) 600V UL / CSA listed</p> <p>F2 36" (914 mm)</p> <p>F3 72" (1829 mm)</p> <p>F4 144" (3658 mm)</p> <p>F___ Lengths greater than 144" (Specify length in 5' increments (e.g. F150 = 150 ft. of leads))</p> <p>HiTemp Leads 18 gauge (.070" dia. potted-in Peek™ insulated leads rated at 400°F (200°C) 600V UL / CSA listed (Approval must be T)</p> <p>H2 36" (914 mm)</p> <p>H3 72" (1829 mm)</p> <p>H4 144" (3658 mm)</p> <p>H___ Lengths greater than 144" (Specify length in 5' increments (e.g. H150 = 150 ft. of leads))</p>	Mini-change®		Micro-change®		DCA 3 - pin Mini-change® type	DBA 3 - pin Micro-change® type	DCD 4 - pin Mini-change® type	DBD 4 - pin Micro-change® type	DCG 5 - pin Mini-change® type	DBG 5 - pin Micro-change® type	SubSea Underwater Connector (Model 73) (Certified not to leak)		3DD 3 pin	3DE 3 pin right-angle	4DD 4 pin	4DE 4 pin right-angle
AC		DC																																																								
Volts	Amps	Volts	Amps																																																							
120	4	24	3																																																							
240	2	48	1.25																																																							
		125	0.5																																																							
		250	0.5																																																							
Magnet	Sensing	Differential																																																								
AMP3	.20"	.25"																																																								
AMS4	.35"	.15"																																																								
AMS7	.20"	.05"																																																								
Mini-change®		Micro-change®																																																								
DCA 3 - pin Mini-change® type	DBA 3 - pin Micro-change® type	DCD 4 - pin Mini-change® type	DBD 4 - pin Micro-change® type																																																							
DCG 5 - pin Mini-change® type	DBG 5 - pin Micro-change® type	SubSea Underwater Connector (Model 73) (Certified not to leak)																																																								
3DD 3 pin	3DE 3 pin right-angle	4DD 4 pin	4DE 4 pin right-angle																																																							
Model	Contact Form	Sensing Range	Outlet Position	Enclosure Material	Approvals	Wiring Options																																																				
42	1																																																									

Ordering Guide

Fill in the boxes to create your 'ordering number.'

Agency Approvals

Termination Options	(2) Hi-Temp	(3) UL Cl. 1, Div. 1	(4) CSA Cl. 1, Div. 1	(6) CSA Cl. 1, Div. 2	(7) CSA General Purpose	(8) UL General Purpose	(9) Cenelec EExdIIC T6 Zone 1
A - Potted PVC Leads		X	X	X	X	X	X
B - Potted PVC Cable		X	X	X	X	X	X
C - Water squeeze (Models 72, 74 & 76)					X	X	
D - Quick Disconnect					X	X	
D - SubSea™ Connector (Models 73, 75 & 77)					X	X	
F - HiTemp™ Teflon Leads	X				X	X	
H - HiTemp™ Peek Leads	X				X	X	

NEMA Ratings

Models 71, 73 ,75, 77	Non-Hazardous			Hazardous		
NEMA CLASSES	4	4X	6	6P	7	9
A - Potted PVC leads	X	X	X	X	X	X
B - Potted PVC cable	X	X	X	X	X	X
C - PVC Cable w/ squeeze	X	X				
D - Quick Disconnect	X	X	X	X		
D - SubSea™ Connector	X	X	X	X		
F - HiTemp™ Leads	X	X	X	X	X	X

X = Approvals Available

Models 72, 74, 76	Non-Hazardous			Hazardous		
NEMA CLASSES	4	4X	6	6P	7	9
A - Potted PVC leads	X	X				
B - Potted PVC cable	X	X				
C - PVC Cable w/ squeeze	X	X				
D - Quick Disconnect	X	X	X	X		
D - SubSea™ Connector	X	X	X	X		
F - HiTemp™ Teflon Leads	X	X				
H - HiTemp™ Peek Leads	X	X				

X = Designed to meet respective NEMA specifications

Wiring Diagrams (male view)

3 Wire PVC & HiTemp Leads	
N/C	Red
N/O	Blue
COM	Black

Terminations A & F

3 Conductor PVC Cable	
N/C	Red
N/O	White
COM	Black

Termination B

4 Wire PVC & HiTemp Leads	
N/C	Red
N/O	Blue
COM	Black
GND	Green


Terminations A & F

4 Conductor PVC Cable	
N/C	Red
N/O	White
COM	Black
GND	Green

Termination B


Mini-Change QDC - 3 Pin	
Pin 1	COM
Pin 2	N/C
Pin 3	N/O

Termination DCA




Mini-Change QDC - 4 Pin	
Pin 1	COM
Pin 2	N/O
Pin 3	N/C
Pin 4	GND

Termination DCD




Mini-Change QDC - 5 Pin - SPDT	
Pin 1	N/O
Pin 2	N/C
Pin 3	GND
Pin 4	Inactive
Pin 5	COM

Termination DCG




Micro-Change QDC - 3 Pin	
Pin 1	COM
Pin 2	N/C
Pin 3	N/O

Termination DBA




Micro-Change QDC - 4 Pin	
Pin 1	COM
Pin 2	N/O
Pin 3	N/C
Pin 4	GND

Termination DBD



SubSea - 3 Pin - Lock Sleeve	
Pin 1	N/C
Pin 2	COM
Pin 3	N/O

Termination 3DD




SubSea - 3 Pin - Right Angle	
Pin 1	COM
Pin 2	N/O
Pin 3	N/C

Termination 3DE



SubSea - 4 Pin - Lock Sleeve	
Pin 1	COM
Pin 2	N/O
Pin 3	N/C
Pin 4	GND

Termination 4DD



SubSea - 4 Pin - Right Angle	
Pin 1	COM
Pin 2	N/O
Pin 3	N/C
Pin 4	GND

Termination 4DE

